


## The RF Line Wideband Linear Amplifier

... designed for amplifier applications in 50 to 100 ohm systems requiring wide bandwidth, low noise and low distortion. This hybrid provides excellent gain stability with temperature and linear amplification as a result of the push-pull circuit design.

- Specified Characteristics at  $V_{CC} = 28\text{ V}$ ,  $T_C = 25^\circ\text{C}$ :
  - Frequency Range — 1 to 200 MHz
  - Output Power — 1580 mW Typ @ 1 dB Compression,  $f = 200\text{ MHz}$
  - Power Gain — 35.5 dB Typ @  $f = 100\text{ MHz}$
  - PEP — 900 mW Typ @ -32 dB IMD
  - Noise Figure — 5 dB Typ @  $f = 200\text{ MHz}$
  - ITO — 47 dBm @  $f = 200\text{ MHz}$
- All Gold Metallization for Improved Reliability
- Unconditional Stability Under All Load Conditions

**CA2832C**

**35.5 dB**  
**1-200 MHz**  
**1.6 WATT**  
**WIDEBAND**  
**LINEAR AMPLIFIER**



**CASE 714F-03, STYLE 1**  
**[CA (POS. SUPPLY)]**

### MAXIMUM RATINGS

| Rating                           | Symbol    | Value       | Unit             |
|----------------------------------|-----------|-------------|------------------|
| DC Supply Voltage                | $V_{CC}$  | 30          | Vdc              |
| RF Power Input                   | $P_{in}$  | +5          | dBm              |
| Operating Case Temperature Range | $T_C$     | -20 to +90  | $^\circ\text{C}$ |
| Storage Temperature Range        | $T_{stg}$ | -40 to +100 | $^\circ\text{C}$ |

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ , $V_{CC} = 28\text{ V}$ , 50 $\Omega$ system unless otherwise noted)

| Characteristic  | Symbol       | Min  | Typ       | Max     | Unit |
|---|--------------|------|-----------|---------|------|
| Frequency Range   | BW           | 1    | —         | 200     | MHz  |
| Gain Flatness ( $f = 1-200\text{ MHz}$ )  | —            | —    | $\pm 0.5$ | $\pm 1$ | dB   |
| Power Gain ( $f = 100\text{ MHz}$ )   | $P_G$        | 34   | 35.5      | 37      | dB   |
| Noise Figure, Broadband ( $f = 200\text{ MHz}$ )  | NF           | —    | 5         | 6       | dB   |
| Power Output — 1 dB Compression ( $f = 1-200\text{ MHz}$ )  | $P_{o\ 1dB}$ | 1260 | 1580      | —       | mW   |
| Power Output — 1 dB Compression ( $f = 150\text{ MHz}$ )  | $P_{o\ 1dB}$ | —    | 2000      | —       | mW   |
| Third Order Intercept (See Figure 10, $f_1 = 200\text{ MHz}$ )  | ITO          | 45   | 47        | —       | dBm  |
| Input/Output VSWR ( $f = 1-200\text{ MHz}$ )  | VSWR         | —    | 1.5:1     | 2:1     | —    |
| Second Harmonic Distortion ( $P_o = 100\text{ mW}$ , $f_{2H} = 150\text{ MHz}$ )                      | $d_{so}$     | —    | -70       | -60     | dB   |
| Peak Envelope Power (Two Tone Distortion Test — See Figure 10) ( $f = 1-200\text{ MHz}$ @ -32 dB IMD) | PEP          | —    | 900       | —       | mW   |
| Supply Current  | $I_{CC}$     | 400  | 435       | 470     | mA   |

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS

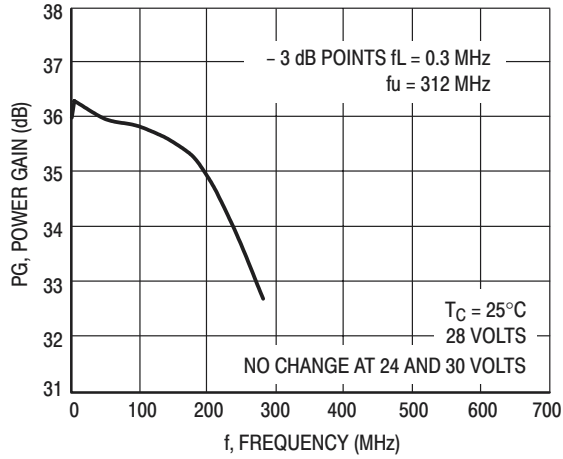


Figure 1. Power Gain versus Voltage

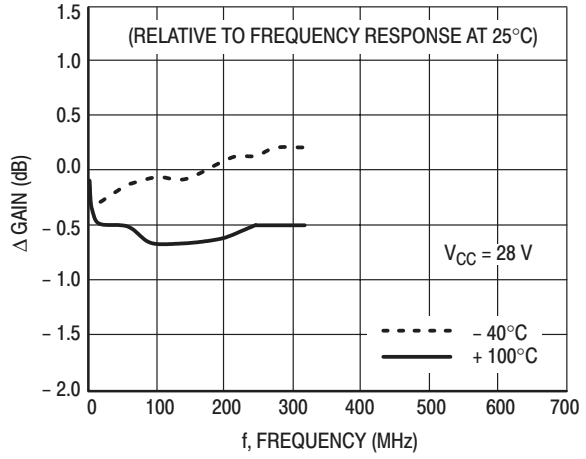


Figure 2. Relative Power Gain versus Temperature

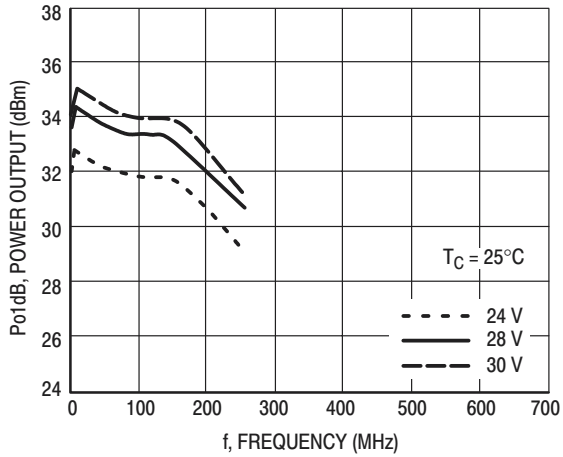


Figure 3. 1 dB Compression versus Voltage

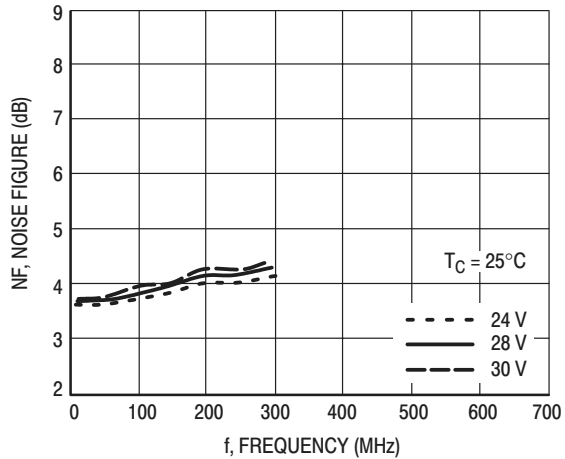


Figure 4. Noise Figure versus Voltage

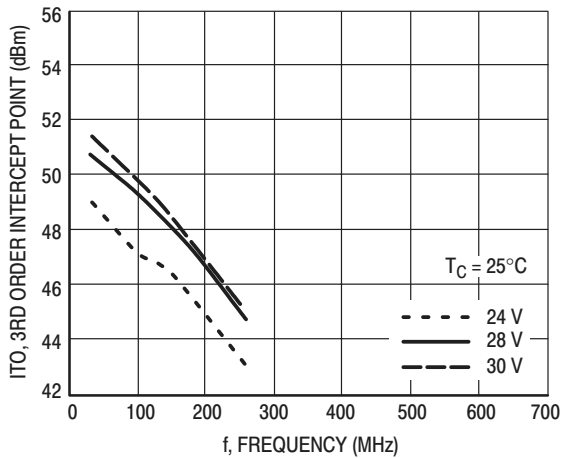


Figure 5. Third Order Intercept versus Voltage

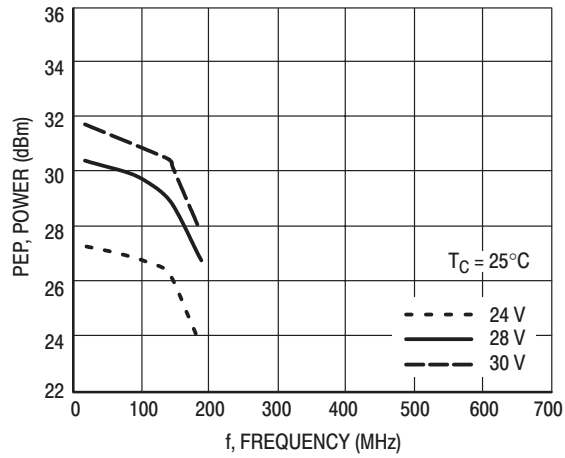


Figure 6. Peak Envelope Power versus Voltage

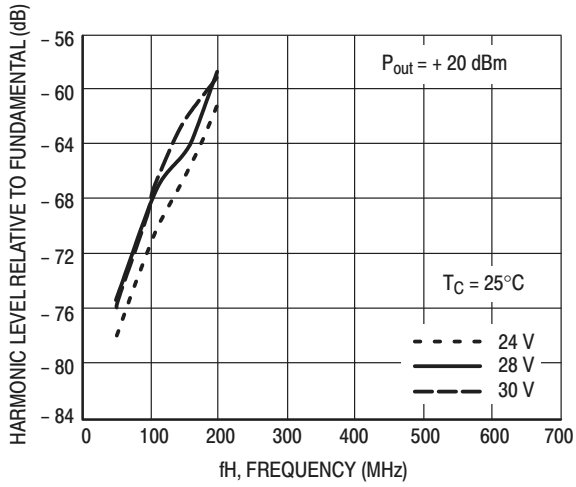


Figure 7. Second Harmonic Distortion versus Voltage

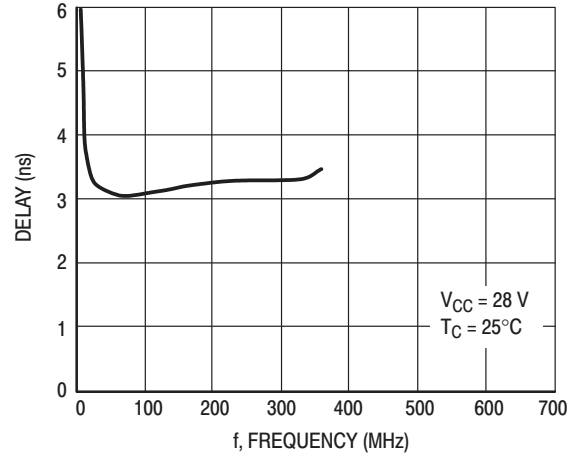


Figure 8. Group Delay versus Frequency

Biased at 28 Volts

$T_C = 25^\circ\text{C}$   $Z_o = 50\Omega$

| Frequency (MHz) | S11   |      | S21  |      | S12 |      | S22   |     |
|-----------------|-------|------|------|------|-----|------|-------|-----|
|                 | Mag   | Ang  | Mag  | Ang  | Mag | Ang  | Mag   | Ang |
| 1               | -16.7 | 64   | 36.0 | 23.3 | -42 | -5.2 | -12.9 | 73  |
| 10              | -21.5 | 21   | 36.2 | -8.4 | -47 | -1.4 | -21.9 | 28  |
| 50              | -18.5 | 6.8  | 35.9 | -56  | -44 | 2.8  | -17.9 | -10 |
| 100             | -16.9 | -1.8 | 35.7 | -103 | -46 | -68  | -15.7 | -48 |
| 200             | -12.9 | -18  | 34.7 | 145  | -49 | -98  | -14.9 | 115 |

Magnitude in dB, Phase Angle in degrees.

Table 1. S-Parameters


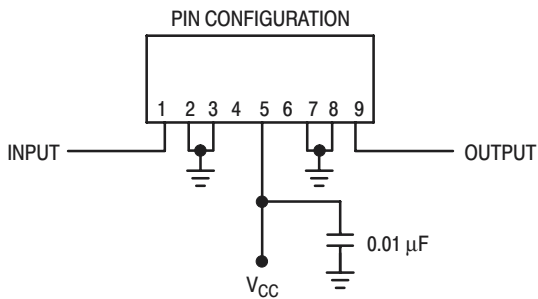



Figure 9. External Connections

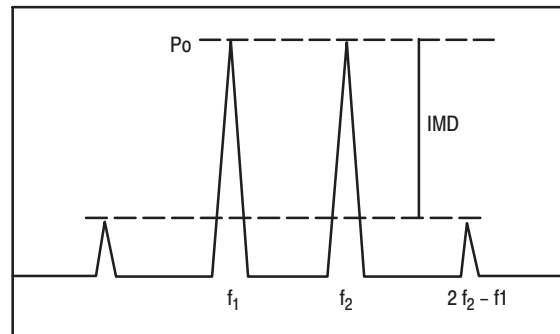

$ITO = P_o + IMD / 2$  @  $IMD > 60$  dB  
 $PEP = 4 \times P_o$  @  $IMD = -32$  dB

Figure 10. Intermodulation Test

## PACKAGE DIMENSIONS

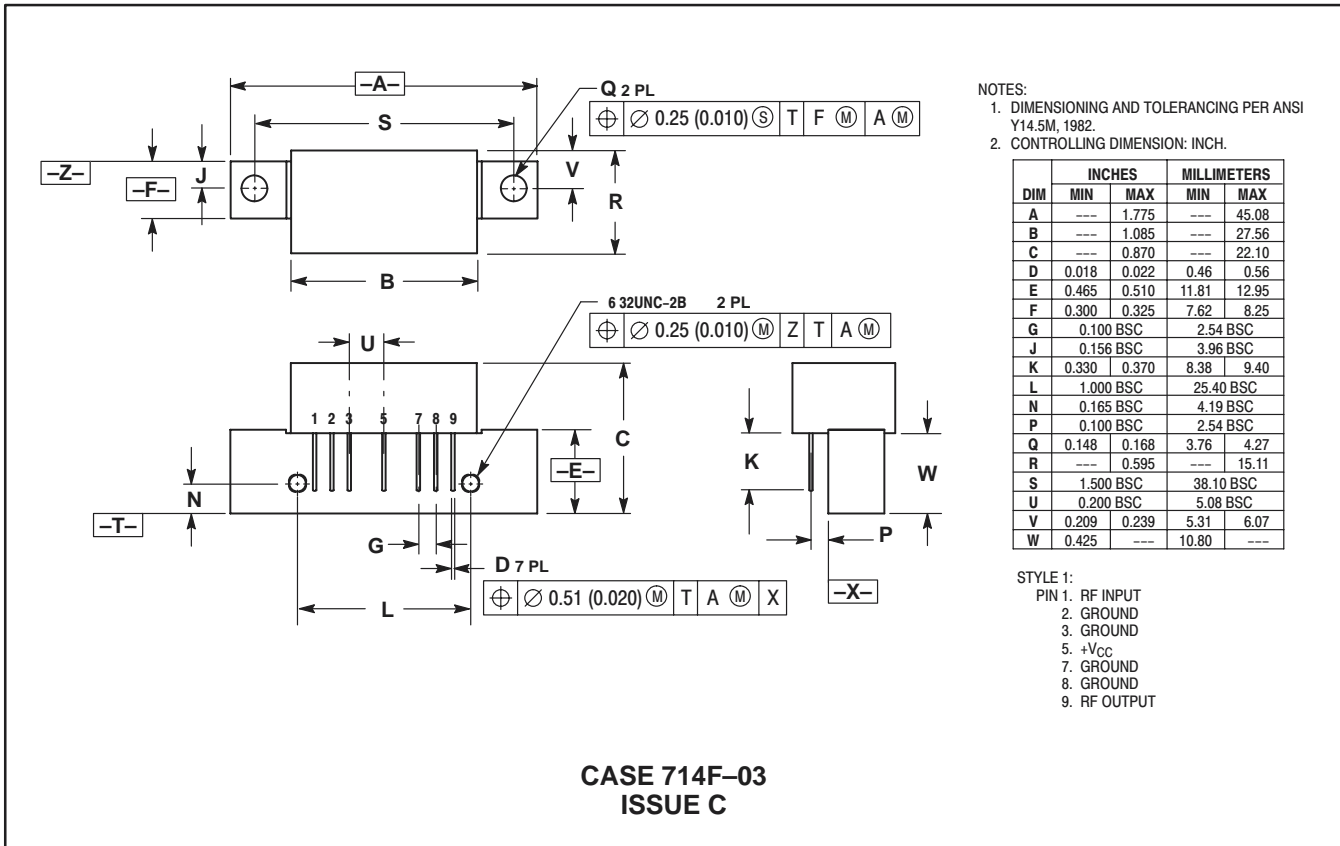

- NOTES:  
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.  
 2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | ---       | 1.775 | ---         | 45.08 |
| B   | ---       | 1.085 | ---         | 27.56 |
| C   | ---       | 0.870 | ---         | 22.10 |
| D   | 0.018     | 0.022 | 0.46        | 0.56  |
| E   | 0.465     | 0.510 | 11.81       | 12.95 |
| F   | 0.300     | 0.325 | 7.62        | 8.25  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.156 BSC |       | 3.96 BSC    |       |
| K   | 0.330     | 0.370 | 8.38        | 9.40  |
| L   | 1.000 BSC |       | 25.40 BSC   |       |
| N   | 0.165 BSC |       | 4.19 BSC    |       |
| P   | 0.100 BSC |       | 2.54 BSC    |       |
| Q   | 0.148     | 0.168 | 3.76        | 4.27  |
| R   | ---       | 0.595 | ---         | 15.11 |
| S   | 1.500 BSC |       | 38.10 BSC   |       |
| U   | 0.200 BSC |       | 5.08 BSC    |       |
| V   | 0.209     | 0.239 | 5.31        | 6.07  |
| W   | 0.425     | ---   | 10.80       | ---   |

- STYLE 1:  
 PIN 1. RF INPUT  
 2. GROUND  
 3. GROUND  
 5. +V<sub>CC</sub>  
 7. GROUND  
 8. GROUND  
 9. RF OUTPUT

ARCHIVE INFORMATION

ARCHIVE INFORMATION

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

**How to reach us:**

**USA/EUROPE/Locations Not Listed:** Motorola Literature Distribution;  
 P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141,  
 4-32-1 Nishi-Gotanda, Shagawa-ku, Tokyo, Japan. 03-5487-8488

**Customer Focus Center: 1-800-521-6274**

**Mfax™:** RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609  
 Motorola Fax Back System – US & Canada ONLY 1-800-774-1848  
 – http://sps.motorola.com/mfax/

**ASIA/PACIFIC:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

**HOME PAGE:** <http://motorola.com/sps/>

