



Woofer ARN-188-05/4

Woofer for HiFi loudspeaker systems. It differs from type ARN-188-03 in coating of cone into the spiral.

ACOUSTICAL DATA

Rated noise power ¹⁾	60	W
Short term maximum power ²⁾	120	W
Rated impedance	4	Ohm
Resonance frequency F_s ⁴⁾	40.000	Hz
Rated frequency range	40 - 4000	Hz
Sensitivity ³⁾	85	dB

TS PARAMETERS

Acquired by MLSSA	D-0-10	
Effective piston area S_d	134.780	cm ²
DC resistance of voice coil R_e	3.459	Ohm
Mechanical Q factor Q_{ms}	4.393	
Electrical Q factor Q_{es}	0.544	
Total Q factor Q_{ts}	0.484	
Voice coil inductance L_e	0.354	
Equivalent volume V_{as}	27.592	l
Moving mass (including air load) M_{ms}	13.237	g
Suspension compliance C_{ms}	1081.424	uM/Newton
Force factor Bl	4.714	Tm
Maximum linear displacement X_{max} ⁵⁾	7	mm

MECHANICAL DATA

Voice coil carrier material	aluminium	
Voice coil diameter	25.4	mm
Winding height of voice coil	13	mm
Yoke diameter	25	mm
Air gap height	5	mm
Magnet external diameter	82	mm
Magnet internal diameter	33	mm
Magnet height	17	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	1	kg

1) DIN CSN 268-5, closed box 10 dm³, intermittent signal 300 hours


2) CSN IEC 268-5, closed box 10 dm³

3) CSN IEC 268-5, standard baffle, 1W, 1 m, 80 - 2000 Hz


4) ±10%

5) Peak - peak

Frequency response

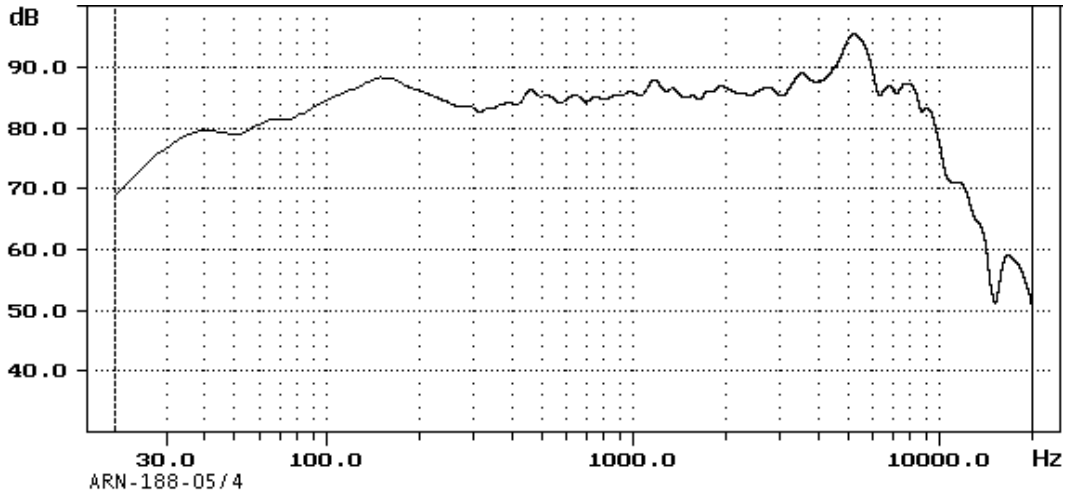

Impedance Magnitude

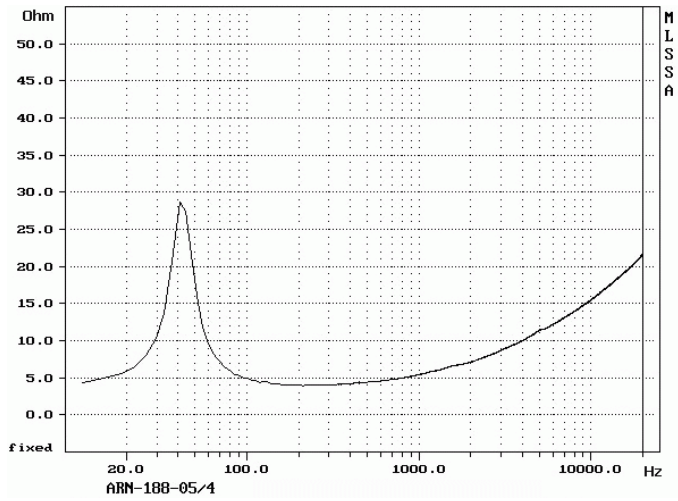

Drawing

