

**2-PHASE DD MOTOR DRIVER**

The KA8310 is a monolithic integrated circuit for 2-phase full wave linear DD motor driving. This IC contains hall AMP, control circuit, CW/CCW circuit, thermal shutdown circuit and motor drivers.

**FUNCTION**


- TSD
- CTL/AMP
- CW/CCW
- HALL AMP
- Driver & AMP

**FEATURES**

- Incorporates rotation direction switching function.
- With regulated power supply for hall device feeding.
- High output current-control current ratio.
- High power dissipation.
- Built-in TSD (Thermal Shut Down) circuit.

**APPLICATION**


- VCRs, video disk players
- Compact disk players
- Tape recorders

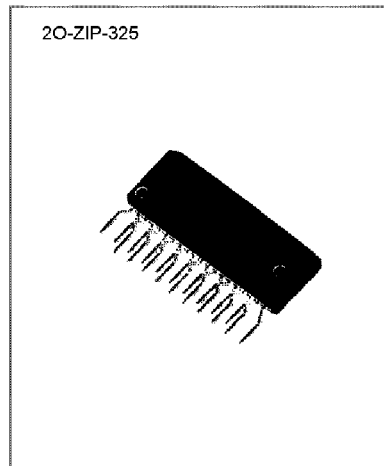

**ORDERING INFORMATION**

Device	Package	Operating Temperature
KA8310	20-ZIP-325	-20°C ~ +75°C


**BLOCK DIAGRAM**

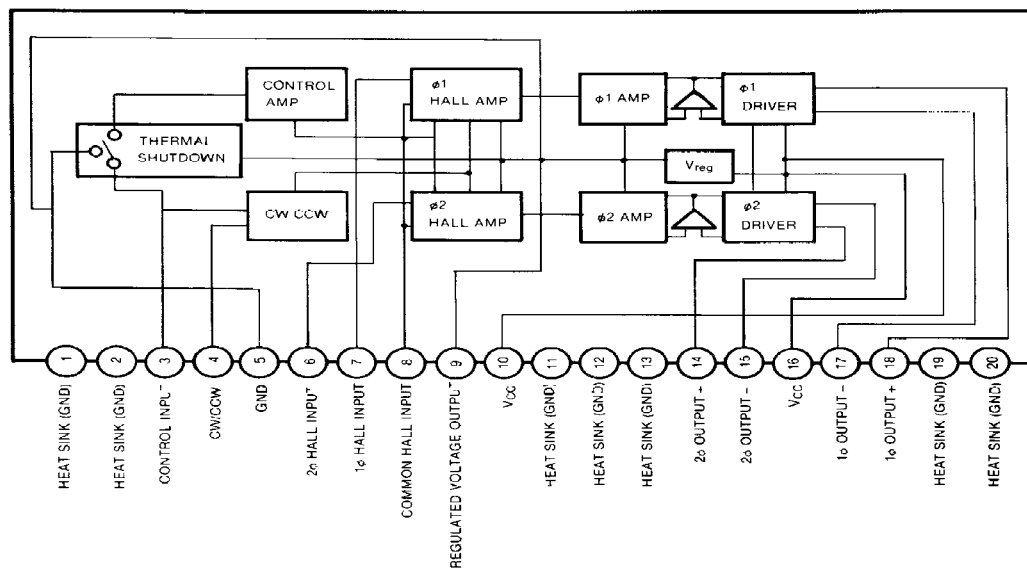

**ABSOLUTE MAXIMUM RATINGS**

Characteristic	Symbol	Value	Unit	Remark
Supply Voltage	$V_{CC}$	20	V	
Maximum Output Current (1)	$I_{O1}$	2.4	A	No Signal
Maximum Output Current (2)	$I_{O2}$	1.6		
Hall Input Voltage	$V_H$	6	V	DC
Pin 3 Current	$I_3$	1	mA	
Pin 4 Voltage	$V_4$	VREG	V	
Output Current	$I_{REG}$	40	mA	
Pin 16 Voltage	$V_{16}$	VCC	V	$V_{CC} \geq V_{16}$
AMP Common Input Voltage	$V_{COM}$	VREG-1.0	V	
Hall Device Frequency	$f_{HALL}$	1	KHz	
Operating Voltage Range	$V_{OPR}$	7.2~20	V	
Junction Temperature	$T_J$	150	°C	
Operating Temperature	$T_{OPR}$	-20~+75	°C	
Storage Temperature	$T_{STG}$	-40~+150	°C	


**POWER DISSIPATION CURVE**

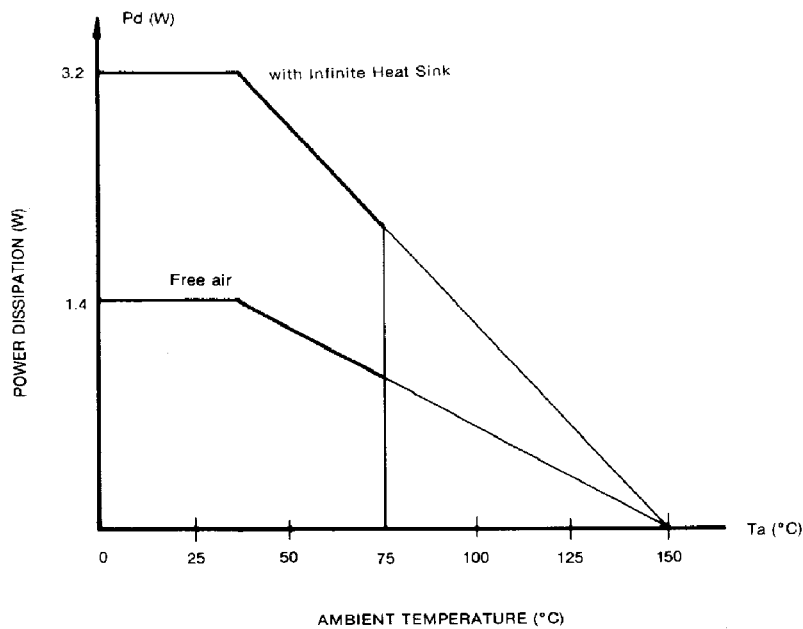

**ELECTRICAL CHARACTERISTICS** ( $V_{CC} = 12V$ ,  $T_A = 25^\circ C$ )

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Quiescent Current	$I_Q$	$I_1 = Q \mu A$	4.5	6.5	8.5	mA
Regulated Voltage (1)	$V_{REG1}$	$I_1 = 0 \mu A$	6.0	6.7	7.4	V
Regulated Voltage (2)	$V_{REG2}$	$I_1 = Q \mu A$ $A_2 = 10mA$	6.0	6.7	7.4	V
Regulated Voltage (3)	$V_{REG3}$	$I_1 = Q \mu A$ $A_2 = 30mA$	6.0	6.7	7.4	V
Control Input Voltage	$V_{CT1}$	$I_1 = 10 \mu A$	1.2	1.35	1.5	V
CW/CCW Output Current	$I_4$	$I_1 = 0 \mu A$	200	410	600	$\mu A$
CW/CCW Threshold Voltage (1)	$V_{T1}$	$V_6 = V_7 = 3.1V$ $V_8 = 3.4V$ $I_1 = 50 \mu A$	2.5	—	—	V
CW/CCW Threshold Voltage (1)	$V_{T2}$	$V_6 = V_7 = 3.1V$ $V_8 = 3.4V$ $I_1 = 50 \mu A$	2.5			V
Current Gain (1)	$G_1$	$V_6 = 3.1V$ $V_8 = 3.4V$ $I_1 = 100 \mu A$ $G_1 = I_{OUT2} / I_1$	4000	4700	5500	.
Current Gain (2)	$G_2$	$V_6 = 3.4V$ $V_8 = 3.1V$ $I_1 = 100 \mu A$ $G_2 = I_{OUT2} / I_1$	4000	4700	5500	.
$\phi 1$ , $\phi 2$ Current Ratio	R	$R = G_1 / G_2$	0.8	1	1.2	
Output Current (1)	$I_{OUT1}$	$V_6 = 3.4V$ $V_8 = 3.1V$ $I_1 = 180 \mu A$	750	890	1150	mA
Output Current (2)	$I_{OUT2}$	$V_7 = 3.4V$ $V_8 = 3.1V$ $I_1 = 180 \mu A$	750	890	1150	mA

TEST CIRCUIT

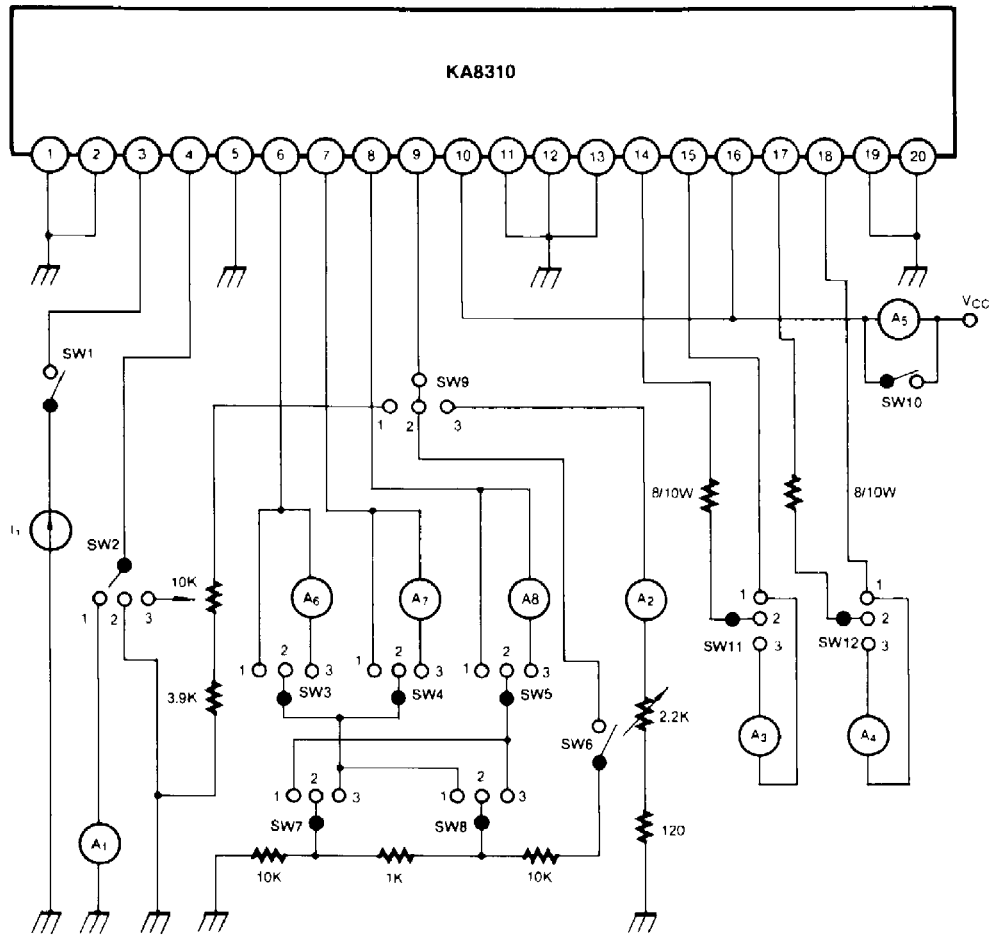


**TEST METHOD** ( $V_{CC}=12V$ )


TEST Characteristic	Condition	Switch Condition												Test Point
		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	SW10	SW11	SW12	
Quiescent Current	$I_1=Q\mu A$	1	2	2	2	2	2	2	2	2	2	2	2	A5
Regulated Voltage (1)	$I_1=0\mu A$	1	2	2	2	2	2	2	2	2	1	2	2	Pin9
Regulated Voltage (2)	$I_1=Q\mu A$ $A_2=10mA$	1	2	2	2	2	2	2	2	3	1	2	2	Pin9
Regulated Voltage (3)	$I_1=Q\mu A$ $A_2=30mA$	1	2	2	2	2	2	2	2	3	1	2	2	Pin9
Control Input Voltage	$I_110\mu A$	1	2	2	2	2	2	2	2	2	1	2	2	Pin3
CW/CCW Output Current	$I_1=0\mu A$	1	1	2	2	2	2	2	2	2	1	2	2	A1
CW/CCW Threshold Voltage (1)	$V_6=V_7=3.1V$ $V_8=3.4V$ $I_1=50\mu A$	1	3	1	1	1	1	3	3	1	1	3	2	Pin4 (A <sub>3</sub> )
CW/CCW Threshold Voltage (2)	$V_6=V_7=3.1V$ $V_8=3.4V$ $I_1=50\mu A$	1	3	1	1	1	1	3	3	1	1	2	3	Pin4 (A <sub>4</sub> )
Current Gain (1)	$V_6=3.1V$ $V_8=3.4V$ $I_1=100\mu A$	1	2	1	2	1	1	3	3	2	1	3	2	A <sub>3</sub> /I <sub>1</sub>
Current Gain (2)	$V_6=3.4V$ $V_8=3.1V$ $I_1=100\mu A$	1	2	2	1	1	1	3	3	2	1	2	3	A <sub>4</sub> /I <sub>1</sub>
$\phi 1, \phi 2$ Current Ratio														
Output Current (1)	$V_6=3.4V$ $V_8=3.1V$ $I_1=180\mu A$	1	2	1	2	1	1	1	1	2	1	3	2	A3
Output Current (2)	$V_7=3.4V$ $V_8=3.1V$ $I_1=180\mu A$	1	2	2	1	1	1	1	1	2	1	2	3	A4

**APPLICATION INFORMATION**

**OUTPUT WAVE FORM (4 PIN GND)**

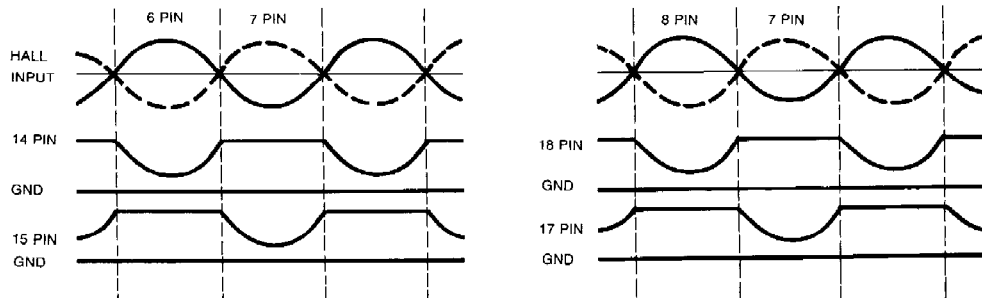

**APPLICATION CIRCUIT**

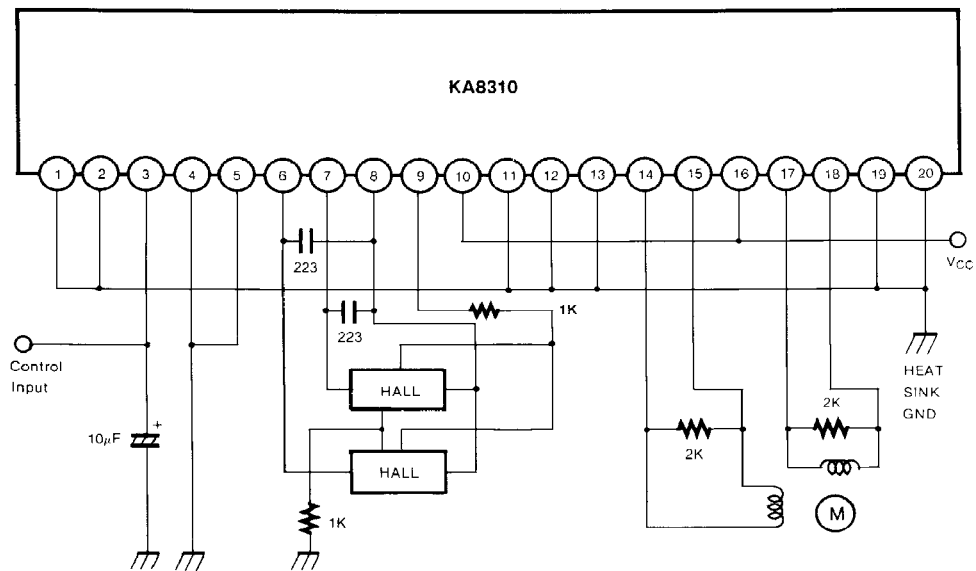

\*The Application of HALL BIAS Pins must to follow above circuits.

Dimensions in Millimeters

