

GENERAL CHARACTERISTICS		
Nominal Overall Diameter	165 mm.	6 in.
Nominal Voice Coil Diameter	25 mm.	1.00 in.
Magnet Weight	245 g	8.64 oz
Overall Weight	1.54 lbs	
Flux Density	1.00 T	


THIELE-SMALL PARAMETERS			
		4Ω	8Ω
Voice Coil DC Resistance	R_E	3.30	6.58
Resonance Frequency	f_S	110.0	106.3
Mechanical Q Factor	Q_{MS}	11.29	10.65
Total Q Factor	Q_{TS}	0.91	1.08
Mechanical Moving Mass	M_{MS}	7.3	6.8
Mechanical Compliance	C_{MS}	287	327
Force Factor	$B \times L$	4.10	4.00
Equivalent Acoustic Volume	V_{AS}	6.1	7.0
Diaphragm Area	S_D	122.7	122.7
Voice Coil Inductance @ 1kHz	L_E	0.30	0.48
Electrical Q Factor	Q_{ES}	1.20	
Maximum Linear Displacement	X_{MAX}	± 0.50 mm	
Reference Efficiency	η_O	0.67 %	
Losses Electrical Resistance	R_{ES}	58.4 Ω	

CONSTRUCTIVE CHARACTERISTICS	
Magnet	Ferrite
Voice Coil Winding	Copper
Voice Coil Former	Epotex
Cone Material	Paper
Surround Material	Integrated Paper
Dust Dome Material	Non-treated Cloth
Basket Material	Pressed Sheet Steel

ELECTRICAL CHARACTERISTICS		
	4Ω	8Ω
Nominal Impedance	4	8
Rated Power	20	20
Musical Power	40	40
Sensitivity@1W,1m	91.5	91.3



Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Free Air Impedance

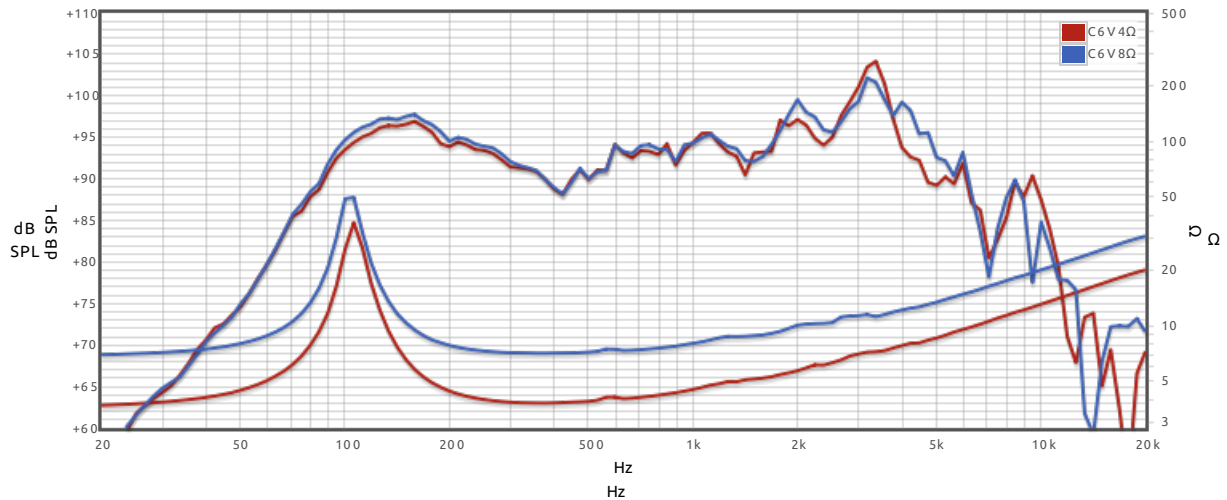

Due to continuing product improvement, the features and the design are subject to change without notice.