



STAMPED FRAME  
PROFESSIONAL SERIES

# EPA-S2015

**15"** Pro audio or MI woofer for small sealed or vented cabinets. Great for small two-way cabinets.



## SPECIFICATION

Nominal Basket Diameter	15", 381 mm
Nominal Impedance*	8 Ω
Power Rating**	
Watts	200 W
Music Program	400 W
Resonance	34 Hz
Usable Frequency Range	40 Hz – 4 kHz
Sensitivity***	96.6 dB
Magnet Weight	38 oz.
Gap Height	0.32", 8.1 mm
Voice Coil Diameter	2", 51 mm

## THIELE & SMALL PARAMETERS\*

Fs	34 Hz
Re	6 Ω
Le	0.79 mH
Qms	9.51
Qes	0.78
Qts	0.72
Vas	11.9 cu.ft., 336.9 liters
Vd	334.6 cc
Cms	0.32 mm/N
BL	10.5 T-M
Mms	66 grams
EBP	44
Xmax	3.87 mm
Sd	864.6 cm <sup>2</sup>
Xlim	12 mm

## MOUNTING INFORMATION


Recommended Enclosure Volume	
Sealed	396–119 liters, 14–4.2 cu.ft.
Vented	82–212 liters, 22.9–7.5 cu.ft.
Driver Volume Displaced	0.118 cu.ft., 3.33 liters
Overall Diameter	15.15", 384.8 mm
Baffle Hole Diameter	13.84", 351.5 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	14.56", 369.8 mm
Depth	6.5", 165.1 mm
Net Weight	9.08 lbs, 4.12 kg
Shipping Weight	11.27 lbs, 5.11 kg

## MATERIALS OF CONSTRUCTION

- Copper voice coil
- Polyimide former
- Ferrite magnet
- Vented w/extended core
- Pressed steel basket
- Treated paper cone
- Sealed cloth cone edge
- Treated paper dust cap



## FREQUENCY RESPONSE & IMPEDANCE CURVE\*

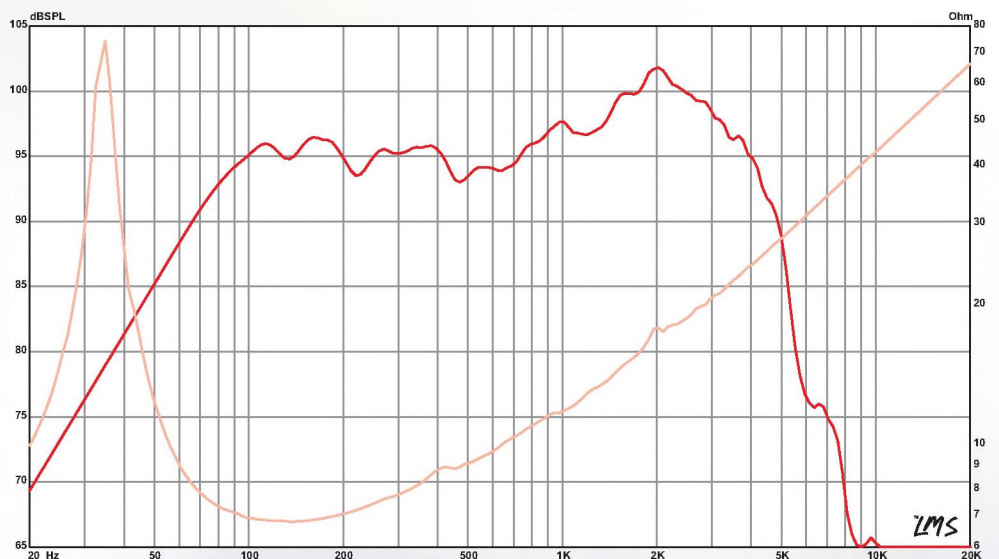

\* See footnotes on page 15 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.