

**16 x 8 x 1 BiMOS-E Crosspoint Switch**


The Intersil CD22M3494 is an array of 128 analog switches capable of handling signals from DC to video. Because of the switch structure, input signals may swing through the total supply voltage range,  $V_{DD}$  to  $V_{EE}$ . Each of the 128 switches may be addressed via the ADDRESS input to the 7 to 128 line decoder. The state of the addressed switch is established by the signal to the DATA input. A low or zero input will open the switch, while a high logic level or a one will result in closure of the addressed switch when the STROBE input goes high from its normally low state. Any number or combination of connections may be active at one time. Each connection, however, must be made or broken individually in the manner previously described. All switches may be reset by taking the RESET input from a zero state to a one state and then returning it to its normal low state.

CS allows crosspoint array to be cascaded for matrix expansion.

**Ordering Information**

PART NUMBER	TEMP. RANGE (°C)	PACKAGE	PKG. NO.
CD22M3494E	-40 to 85	40 Ld PDIP	E40.6
CD22M3494MQ	-40 to 85	44 Ld PLCC (Mitel Ld Compatible)	N44.65
CD22M3494SQ	-40 to 85	44 Ld PLCC (SGS Ld Compatible)	N44.65

**Block Diagram**

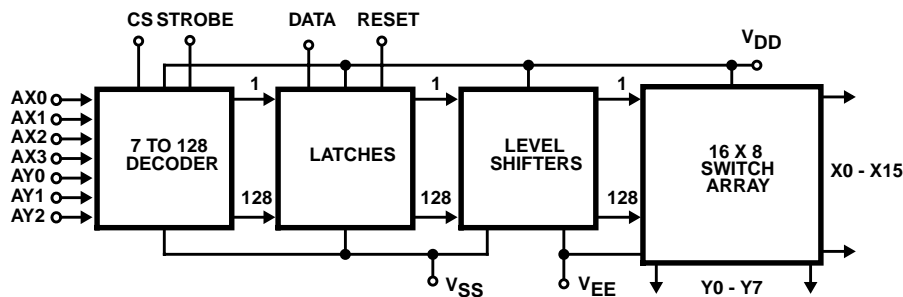

**Features**

- 128 Analog Switches
- Low  $r_{ON}$
- Guaranteed  $r_{ON}$  Matching
- Analog Signal Input Voltage Equal to the Supply Voltage
- Wide Operating Voltage . . . . . 4V to 15V
- Parallel Input Addressing
- High Latch Up Current . . . . . 50mA (Min)
- Very Low Crosstalk
- Pin and Functionally Compatible with the Following Types: SGS M3494 and Mitel MT8816

**Applications**

- PBX Systems
- Instrumentation
- Analog and Digital Multiplexers
- Video Switching Networks

**Absolute Maximum Ratings**

DC Supply Voltage ( $V_{DD}$ )  
 Voltages Referenced to  $V_{EE}$  ..... -0.5 to 16V

DC Supply Voltage ( $V_{DD}$ )  
 Voltages Referenced to  $V_{SS}$  ..... -0.5, 16V

DC Input Diode Current,  $I_{IN}$   
 For  $V_I$ , Digital <  $V_{SS}$  -0.5V or  $V_I$ ,  
 Analog <  $V_{EE}$  -0.5V or  $V_I > V_{DD}$  0.5V .....  $\pm 20$ mA

DC Output Diode Current,  $I_{OK}$   
 For  $V_O$ , Digital <  $V_{SS}$  -0.5V or  $V_O$ ,  
 Analog <  $V_{EE}$  -0.5V or  $V_O > V_{DD}$  0.5V .....  $\pm 20$ mA

DC Transmission Gate Current .....  $\pm 25$ mA

Power Dissipation Per Package ( $P_o$ )  
 For  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (PDIP) ..... 500mW  
 For  $T_A = 60^\circ\text{C}$  to  $85^\circ\text{C}$  Derate Linearly ..... 12mW/ $^\circ\text{C}$  to 200mW  
 For  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$  (PLCC) ..... 600mW

**Thermal Information**

Thermal Resistance (Typical, Note 1)  $\theta_{JA}$  ( $^\circ\text{C}/\text{W}$ )

PDIP Package ..... 55  
 PLCC Package ..... 43

Maximum Junction Temperature Plastic Package .....  $150^\circ\text{C}$   
 Maximum Storage Temperature Range ( $T_{STG}$ ) .....  $-65^\circ\text{C}$  to  $150^\circ\text{C}$   
 Maximum Lead Temperature (Soldering 10s) .....  $300^\circ\text{C}$   
 (PLCC - Lead Tips Only)

**Operating Conditions**

Operating Temperature Range ( $T_A$ )  
 Package Type E and Q .....  $-40^\circ\text{C}$  to  $85^\circ\text{C}$

Supply Voltage Range  
 For  $T_A =$  Full Package Temperature Range  
 $V_{SS} = 0\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_{DD}$  ..... 4V to 15V

DC Input or Output Voltage  $V_I$  or  $V_O$  .....  $V_{EE}$  to  $V_{DD}$   
 Digital Input Voltage .....  $V_{SS}$  to  $V_{DD}$

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

- $\theta_{JA}$  is measured with the component mounted on an evaluation PC board in free air.

**Electrical Specifications**  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $V_{DD} = 5\text{V}$ ,  $V_{SS} = 0\text{V}$ ,  $V_{EE} = 0\text{V}$ , Unless Otherwise Specified

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
<b>STATIC CONTROLS</b>						
Supply Current	$I_{DD}$	$V_{DD} = 5\text{V}$ , Logic Inputs = $V_{DD}$	-	-	2	mA
		$V_{DD} = 15\text{V}$ , Logic Inputs = $V_{DD}$	-	-	5	mA
High-Level Input Voltage	$V_{IH}$	$V_{DD} = 5\text{V}$	2.4 (Note 2)	-	-	V
Low-Level Input Voltage	$V_{IL}$		-	-	0.8 (Note 2)	V
Input Leakage Current, Digital	$I_{IN}$	Reset = Low (Note 3)	-	-	$\pm 10$ (Note 4)	$\mu\text{A}$

**Electrical Specifications**  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ ,  $V_{DD} = 12\text{V}$ ,  $V_{SS} = 0\text{V}$ ,  $V_{EE} = 0\text{V}$ , Unless Otherwise Specified.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS	
<b>STATIC CROSSPOINTS</b>							
ON Resistance	$r_{ON}$	$V_{SS} = V_{EE} = 0\text{V}$ , $T_A = 25^\circ\text{C}$ , $V_{IN} = V_{DD}/2$ , $V_X$ - $V_Y = 0.2\text{V}$	$V_{DD} = 10\text{V}$	-	40	75	$\Omega$
			$V_{DD} = 12\text{V}$	-	36	65	$\Omega$
ON Resistance	$r_{ON}$	$T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ , $V_{IN} = V_{DD}/2$ , $V_X$ - $V_Y = 0.2\text{V}$ , $V_{SS} = V_{EE} = 0\text{V}$	$V_{DD} = 10\text{V}$	-	50	75	$\Omega$
			$V_{DD} = 12\text{V}$	-	45	65	$\Omega$
Difference in ON Resistance Between Any Two Switches	$\Delta r_{ON}$	$T_A = 25^\circ\text{C}$ , $V_{IN} = V_{DD}/2$ , $V_X$ - $V_Y = 0.2\text{V}$ , $V_{SS} = V_{EE} = 0\text{V}$ , $V_{DD} = 12\text{V}$	-	6	10	$\Omega$	

## CD22M3494

### Electrical Specifications $T_A = -40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ , $V_{DD} = 12\text{V}$ , $V_{SS} = 0\text{V}$ , $V_{EE} = 0\text{V}$ , Unless Otherwise Specified. (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Difference in ON Resistance Between Any Two Switches	$\Delta r_{ON}$	$T_A = -40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ , $V_{IN} = V_{DD}/2$ , $V_X - V_Y = 0.2\text{V}$ , $V_{DD} = 12\text{V}$ $V_{SS} = V_{EE} = 0\text{V}$ , $V_{DD} = 12\text{V}$	-	-	10	$\Omega$
OFF-State Leakage Current	$I_L$	$ V_X - V_Y  = 12\text{V}$	-	-	$\pm 10$ (Note 4)	$\mu\text{A}$

### Electrical Specifications $T_A = 25^{\circ}\text{C}$ , $V_{SS} = 0\text{V}$ , $V_{EE} = 0\text{V}$ , $V_{DD} = 14\text{V}$ , $C_L = 50\text{pF}$ , Unless Otherwise Specified.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS	
<b>DYNAMIC CROSSPOINTS</b>						
Switch I/O Capacitance	$V_{IN} = V_{DD}/2$ , $f = 1\text{MHz}$	-	-	20	pF	
Switch Feedthrough Capacitance	$V_{IN} = V_{DD}/2$ , $f = 1\text{MHz}$	-	0.3	-	pF	
Propagation Delay Time (Switch ON) Signal Input to Output, $t_{PHL}$ or $t_{PLH}$		-	5	30	ns	
Frequency Response Channel ON $f = 20\log(V_X/V_Y) = -3\text{dB}$	$C_L = 3\text{pF}$ , $R_L = 75\Omega$ , $V_{IN} = 2V_{P-P}$	-	50	-	MHz	
Total Harmonic, THD	$V_{IN} = 2V_{P-P}$ , $f = 1\text{kHz}$	-	0.01	-	%	
Feedthrough Channel OFF Feedthrough = $20\log(V_X/V_Y) = F_{DT}$	$V_{IN} = 2V_{P-P}$ , $f = 1\text{kHz}$	-	-95	-	dB	
Frequency for Signal Crosstalk, $f_{CT}$ Attenuation of:	40dB	$V_{IN} = 2V_{P-P}$ , $R_L = 75\Omega$	-	10	-	MHz
	110dB	$V_{IN} = 2V_{P-P}$ , $R_L = 1\text{k}\Omega \parallel 10\text{pF}$	-	5	-	kHz
Control Crosstalk DATA-Input, ADDRESS, or STROBE to Output	Control Input = $3V_{P-P}$ Square Wave, $t_R = t_F = 10\text{ns}$ $R_{IN} = 1\text{K}$ , $R_{OUT} = 10\text{k}\Omega \parallel 10\text{pF}$	-	75	-	mV <sub>PEAK</sub>	

### Electrical Specifications $T_A = 25^{\circ}\text{C}$ , $V_{SS} = 0\text{V}$ , $V_{EE} = 0\text{V}$ , $V_{DD} = 14\text{V}$ , $R_L = 1\text{k}\Omega \parallel 50\text{pF}$ , Unless Otherwise Specified.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
<b>DYNAMIC CONTROLS</b>						
Digital Input Capacitance	$C_{IN}$	$V_{IN} = 5\text{V}$ , $f = 1\text{MHz}$	-	5	-	pF
Propagation Delay Time STROBE to Output	Switch Turn-ON		-	50	100	ns
	Switch Turn-OFF		-	50	100	ns
DATA-IN to Output	Turn-ON to High Level		-	60	100	ns
	Turn-ON to Low Level		-	70	100	ns
ADDRESS to Output	Turn-ON to High Level		-	70	-	ns
	Turn-OFF to Low Level		-	70	-	ns


**Electrical Specifications**  $T_A = 25^{\circ}\text{C}$ ,  $V_{SS} = 0\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_{DD} = 14\text{V}$ ,  $R_L = 1\text{k}\Omega \parallel 50\text{pF}$ , Unless Otherwise Specified. (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Setup Time						
CS to STROBE	$t_{CS}$		10	-	-	ns
DATA-IN to STROBE	$t_{DS}$		10	-	-	ns
ADDRESS to STROBE	$t_{AS}$		10	-	-	ns
Hold Time						
STROBE to CS	$t_{CH}$		10	-	-	ns
ADDRESS to CS			10	-	-	ns
STROBE to DATA-IN	$t_{DH}$		20	-	-	ns
STROBE to ADDRESS	$t_{AH}$		10	-	-	ns
DATA-IN to CS			20	-	-	ns
Pulse Width						
STROBE	$t_{SPW}$		20	-	-	ns
RESET	$t_{RPW}$		20	-	-	ns
RESET Turn-OFF to Output Delay	$t_{PHZ}$		-	70	100	ns

NOTES:

2. Operation of  $V_{IH}$  at 2.4V or  $V_{IL}$  at 0.8V will result in much higher supply current ( $I_{DD}$ ) than for logic inputs equal to  $V_{DD}$  or  $V_{SS}$  respectively.
3. Reset  $I_{IH} < 20\mu\text{A}$ , Reset =  $V_{IH}$ .
4. At  $25^{\circ}\text{C}$  Limit is  $\pm 100\text{nA}$ .

**Timing Diagram**

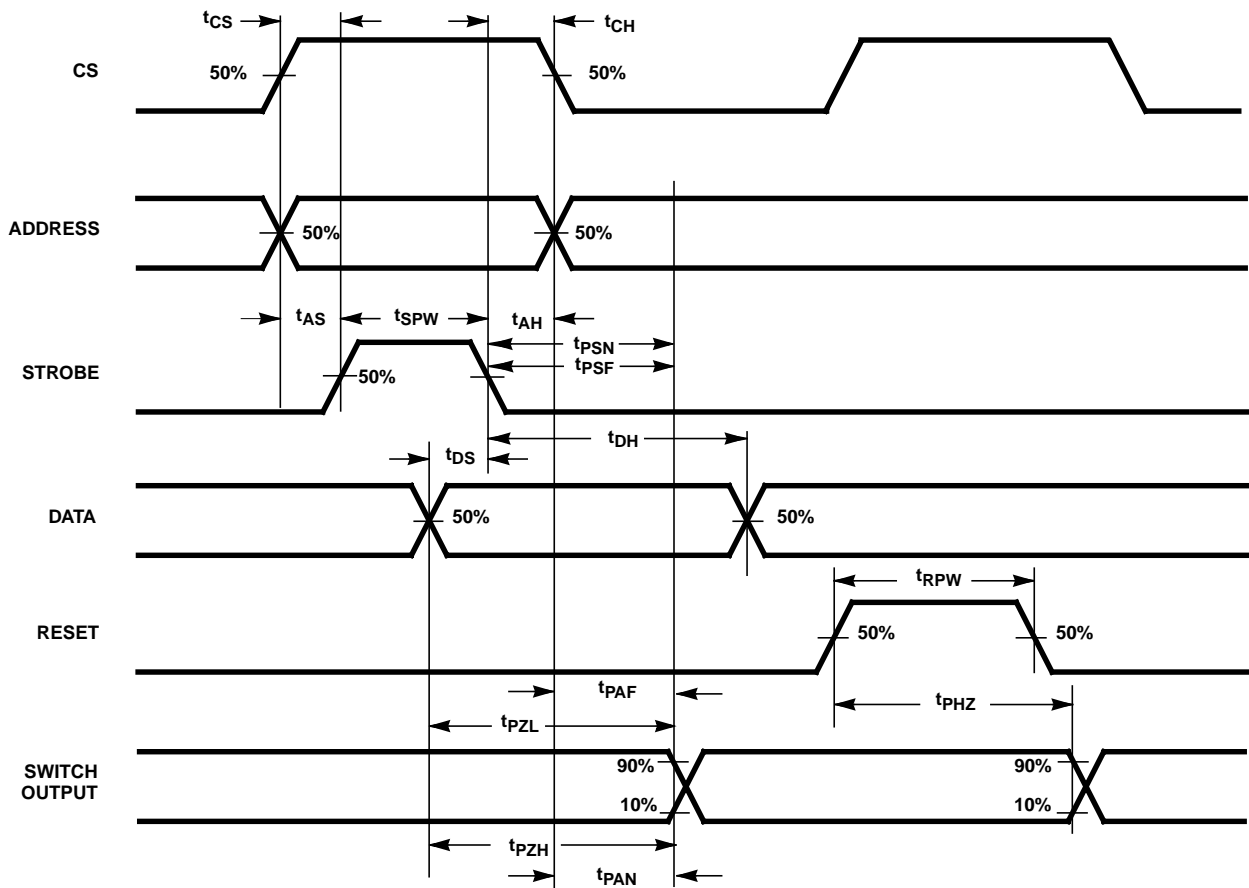

TRUTH TABLE X AXIS

X ADDRESS				X SWITCH
AX3	AX2	AX1	AX0	
0	0	0	0	X0
0	0	0	1	X1
0	0	1	0	X2
0	0	1	1	X3
0	1	0	0	X4
0	1	0	1	X5
0	1	1	0	X12
0	1	1	1	X13
1	0	0	0	X6
1	0	0	1	X7
1	0	1	0	X8
1	0	1	1	X9
1	1	0	0	X10

TRUTH TABLE X AXIS (Continued)

X ADDRESS				X SWITCH
AX3	AX2	AX1	AX0	
1	1	0	1	X11
1	1	1	0	X14
1	1	1	1	X15

TRUTH TABLE Y AXIS

Y ADDRESS			Y SWITCH
AY2	AY1	AY0	
0	0	0	Y0
0	0	1	Y1
0	1	0	Y2
0	1	1	Y3
1	0	0	Y4
1	0	1	Y5
1	1	0	Y6
1	1	1	Y7

To make a connection (close switch) between any two points, specify an "X" address, a "Y" address, set "DATA" high, and switch "STROBE" from low to high. To break a connection, follow this same procedure with "DATA" low.

Example:


To connect switch X3 to switch Y4:

To connect switch X6 to switch Y7:

To break connection from X3 to Y4:

DATA	X ADDRESS				Y ADDRESS		
	AX3	AX2	AX1	AX0	AY2	AY1	AY0
1	0	0	1	1	1	0	0
1	1	0	0	0	1	1	1
0	0	0	1	1	1	0	0

**Typical Performance Curve**

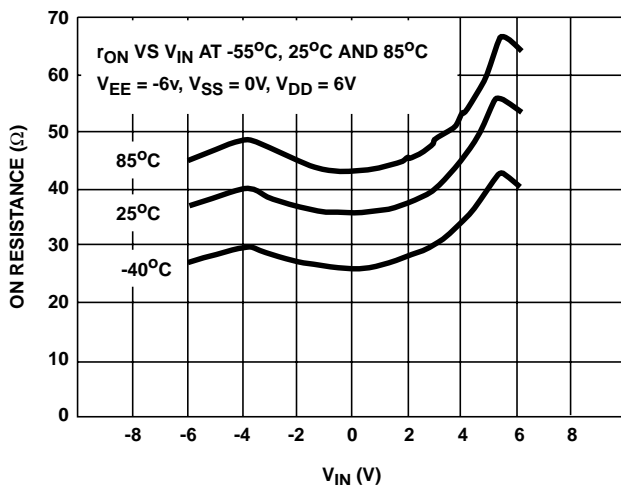



All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

*Intersil semiconductor products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see web site **www.intersil.com**

### **Sales Office Headquarters**

#### **NORTH AMERICA**

Intersil Corporation  
P. O. Box 883, Mail Stop 53-204  
Melbourne, FL 32902  
TEL: (321) 724-7000  
FAX: (321) 724-7240

#### **EUROPE**

Intersil SA  
Mercure Center  
100, Rue de la Fusee  
1130 Brussels, Belgium  
TEL: (32) 2.724.2111  
FAX: (32) 2.724.22.05

#### **ASIA**

Intersil (Taiwan) Ltd.  
7F-6, No. 101 Fu Hsing North Road  
Taipei, Taiwan  
Republic of China  
TEL: (886) 2 2716 9310  
FAX: (886) 2 2715 3029