

PRELIMINARY DATA SHEET

# CDC 3207G-B Automotive Controller



Edition Nov. 28, 2002  
6251-578-1PD



---

**Contents**

<b>Page</b>	<b>Section</b>	<b>Title</b>
<b>3</b>	<b>1.</b>	<b>Introduction</b>
3	1.1.	Features
5	1.2.	Abbreviations
6	1.3.	Block Diagram
<b>7</b>	<b>2.</b>	<b>Packages and Pins</b>
7	2.1.	Package Outline Dimensions
8	2.2.	Pin Assignment
9	2.3.	External Components
<b>11</b>	<b>3.</b>	<b>Electrical Data</b>
11	3.1.	Absolute Maximum Ratings
12	3.2.	Recommended Operating Conditions
13	3.3.	Characteristics
14	3.4.	Recommended Quartz Crystal Characteristics
<b>15</b>	<b>4.</b>	<b>CPU and Clock System</b>
<b>17</b>	<b>5.</b>	<b>Memory and Boot System</b>
<b>19</b>	<b>6.</b>	<b>Core Logic</b>
19	6.1.	Control Word CW
<b>21</b>	<b>7.</b>	<b>Hardware Options</b>
21	7.1.	Functional Description
<b>23</b>	<b>8.</b>	<b>Differences</b>
<b>24</b>	<b>9.</b>	<b>Data Sheet History</b>

# 1. Introduction

The device is a microcontroller for use in automotive applications. The on-chip CPU is ARM® processor ARM7TDMI™ with 32bit data and address bus, which supports Thumb™ format instructions.

The chip contains timer/counters, interrupt controller, multi channel AD converter, stepper motor and LCD driver, CAN

interfaces and PWM outputs and a crystal clock multiplying PLL.

This document provides MCM Flash hardware specific information. General information on operating the IC can be found in the document “CDC32xxG-B Automotive Controller Family User Manual, CDC3205G-B Automotive Controller” (6251-546-1PD).

## 1.1. Features

**Table 1–1:** CDC32xxG-B Family Feature List

Item	This Device:			
	CDC3205G-A EMU	CDC3205G-B EMU	CDC3207G-B MCM Flash	CDC3272G-B Mask ROM
<b>Core</b>				
CPU	32bit ARM7TDMI™			
CPU operation modes	DEEP SLOW, SLOW, FAST and PLL			
CPU clock multiplication	PLL delivering up to 24MHz	PLL delivering up to 50MHz		
EMI Reduction Mode	-	selectable in PLL mode		
Quartz oscillator	4 to 5MHz			
RAM, 32bit wide	16kByte	32kByte	32kByte	12kByte
ROM	ROMless, ext. up to 4M x 32/8M x 16, int. 8-KByte Boot ROM	ROMless, ext. up to 4M x 32/8M x 16, int. 8-KByte Boot ROM	512-kByte Flash (256K x 16) top boot conf., int. 8-KByte Boot ROM	384kByte (96K x 32/192K x 16), + 8-KByte Test ROM
Digital Watchdog	✓			
Central Clock Divider	✓			
Interrupt Controller expanding IRQ	40 inputs, 16 priority levels			
Port Interrupts including Slope Selection	6 inputs			
Patch Module	-			10 ROM locations
Boot System	allows in-system downloading of external code to Flash memory via JTAG			-

**Table 1–1:** CDC32xxG-B Family Feature List

**This Device:**

Item	CDC3205G-A EMU	CDC3205G-B EMU	CDC3207G-B MCM Flash	CDC3272G-B Mask ROM
<b>Analog</b>				
Reset/Alarm	Combined Input for Regulator Input Supervision			
Clock and Supply Supervision	✓			
10 Bit ADC, charge balance type	16 channels (6 selectable as digital input)	16 channels (each selectable as digital input)		
ADC Reference	VREF Pin	VREF Pin, P1.0 Pin, P1.1 Pin or VREFINT Internal Bandgap selectable		
Comparators	P06COMP with 1/2 AVDD reference	P06COMP with 1/2 AVDD reference, WAITCOMP with Internal Bandgap reference		
LCD	Internal processing of all analog voltages for the LCD driver			
<b>Communication</b>				
DMA	1 DMA Channel for servicing a port or an SPI	3 DMA Channels, one each for servicing the Graphics Bus interface, SPI0 and SPI1		
UART	2: UART0 and UART1			
Synchronous Serial Peripheral Interfaces	2: SPI0 and SPI1			
Full CAN modules V2.0B	3: CAN0, CAN1 and CAN2 with 256bytes of object RAM each (LCAN0009)	3: CAN0, CAN1 and CAN2 with 512bytes of object RAM each (LCAN0009)	2: CAN0 and CAN1 with 512bytes of object RAM each (LCAN0009)	
DIGITbus	1 master module			
I <sup>2</sup> C	2 master modules: I2C0 and I2C1			
<b>Input &amp; Output</b>				
Universal Ports selectable as 4:1 mux LCD Segment/Backplane lines or Digital I/O Ports	up to 54 I/O or 50 LCD segment lines (=200 segments)	up to 52 I/O or 48 LCD segment lines (=192 segments), individually configurable as I/O or LCD		
Universal Port Slew Rate	Mask selectable	SW selectable		
Stepper Motor Control Modules with high current ports	7 Modules, 32 di/dt controlled ports			
PWM Modules, each configurable as two 8Bit PWMs or one 16Bit PWM	6 Modules: PWM0/1, PWM2/3, PWM4/5, PWM6/7, PWM8/9 and PWM10/11			
Phase-Frequency Modulator	-	1: PFM0		
Audio Module with auto-decay	✓			
SW selectable Clock outputs	2			

**Table 1–1:** CDC32xxG-B Family Feature List

Item	This Device:			
	CDC3205G-A EMU	CDC3205G-B EMU	CDC3207G-B MCM Flash	CDC3272G-B Mask ROM
<b>Timers &amp; Counters</b>				
16bit free running counters with Capture/Compare modules	CCC0 with 4 CAPCOM CCC1 with 2 CAPCOM			
16bit timers	1: T0			
8bit timers	4: T1, T2, T3 and T4			
<b>Miscellaneous</b>				
Scalable layout in CAN, RAM and ROM	-		✓	
Various randomly selectable HW options	Set by copy from user program storage during system start-up			
JTAG test interface	✓		allows Flash programming	✓
On Chip Debug Aids	Embedded Trace Module, JTAG		JTAG	
Core Bond-Out	✓		-	
Supply Voltage	4.5 to 5.5V	3.5 to 5.5V (limited I/O performance below 4.5V)		
Case Temperature Range	0 to +70C		-40 to +105C	
<b>Package</b>				
Type	Ceramic 257PGA		Plastic 128QFP 0.5mm pitch	
Bonded Pins	256		128	126

ARM® and Thumb® are the registered trademarks of ARM Limited.  
ARM7TDMI™ is the trademark of ARM Limited.

## 1.2. Abbreviations

AM	Audio Module	UART	Universal Asynchronous Receiver Transmitter
CAN	Controller Area Network Module	WAITCOMP	Wait Comparator
CAPCOM	Capture/Compare Module		
CCC	Capture/Compare Counter		
CPU	Central Processing Unit		
DMA	Direct Memory Access Module		
ERM	EMI Reduction Mode		
ETM	Embedded Trace Module		
ICU	Interrupt Controller		
I2C	I <sup>2</sup> C Interface Module		
LCD	Liquid Crystal Display Module		
P06COMP	P0.6 Alarm Comparator		
PINT	Port Interrupt Module		
PWM	8Bit Pulse Width Modulator Module		
SM	Stepper Motor Control Module		
SPI	Serial Synchronous Peripheral Interface		
T	Timer		

1.3. Block Diagram


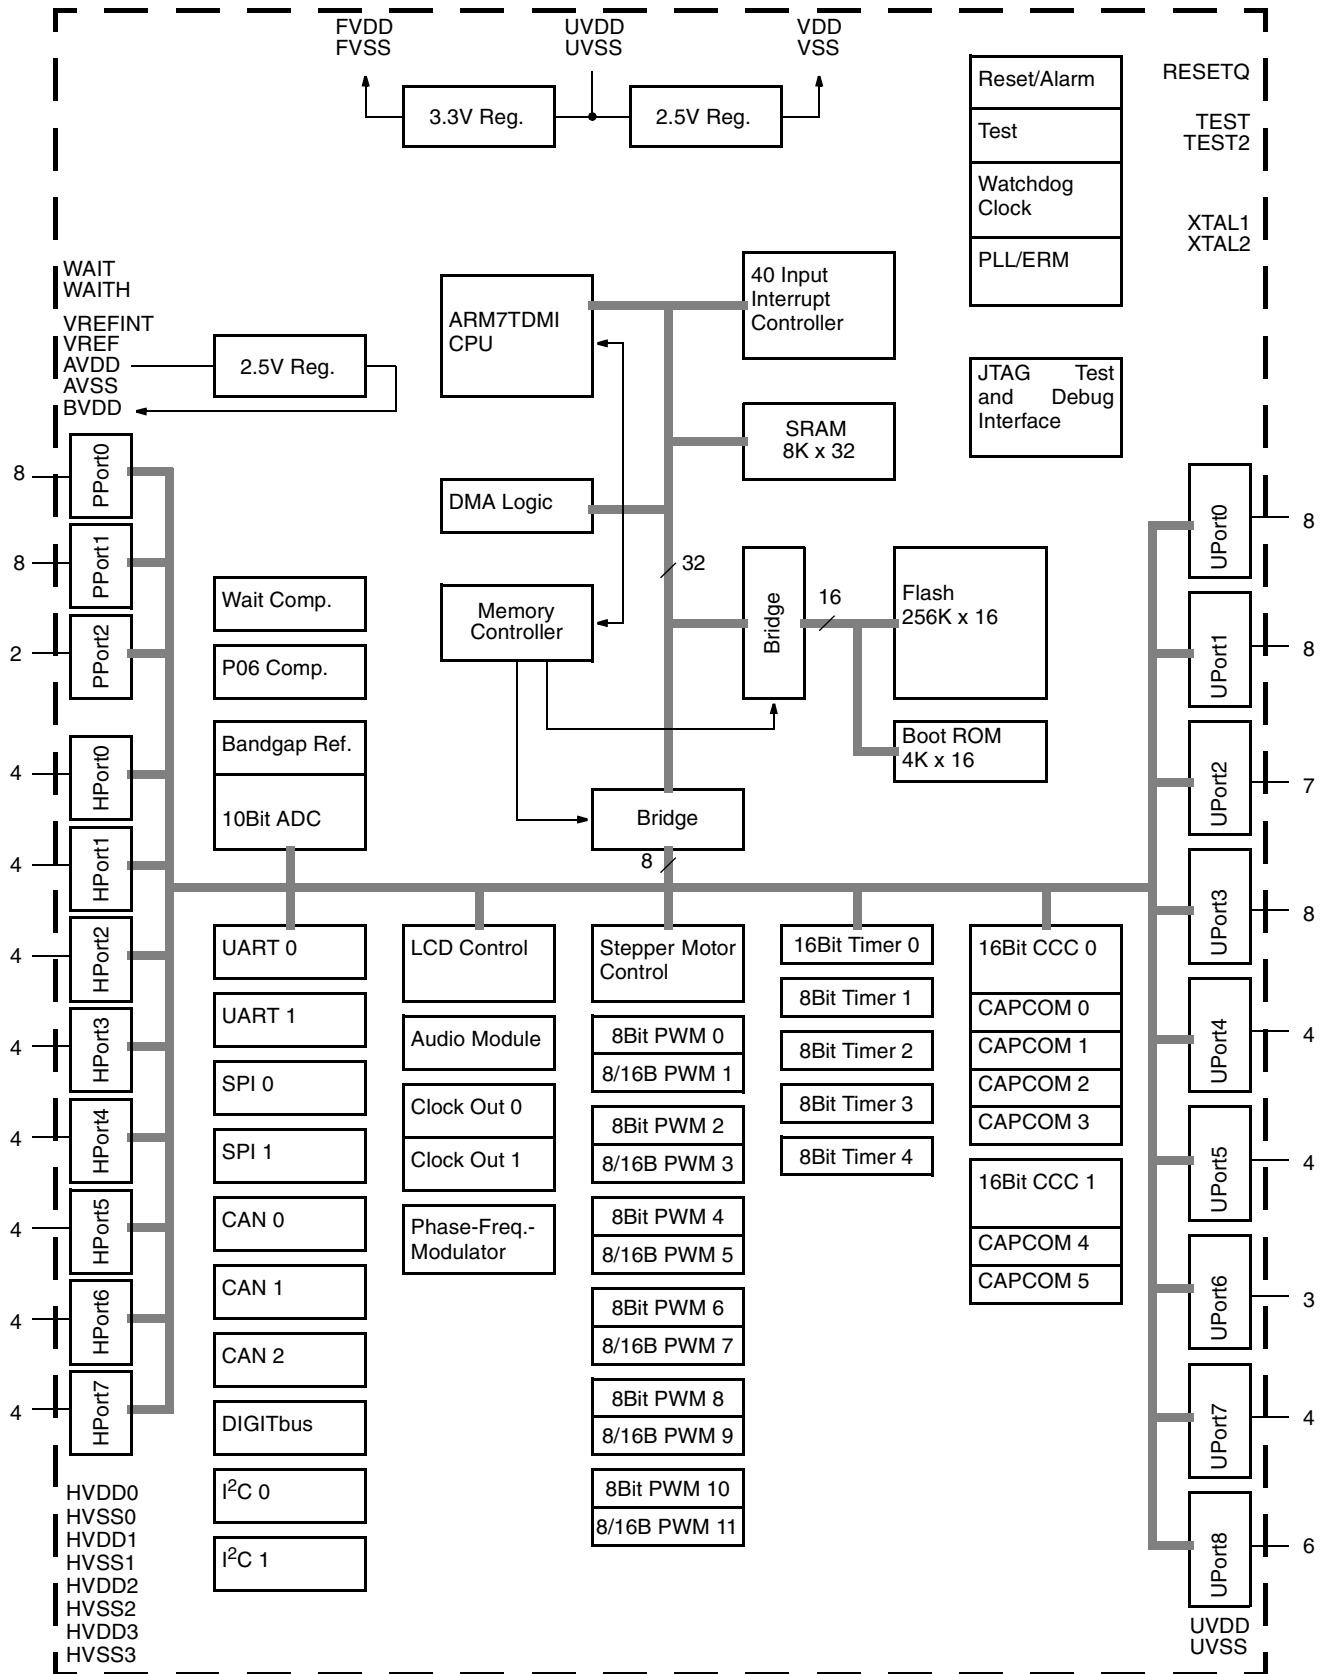


Fig. 1-1: CDC3207G-B block diagram

## 2. Packages and Pins

### 2.1. Package Outline Dimensions

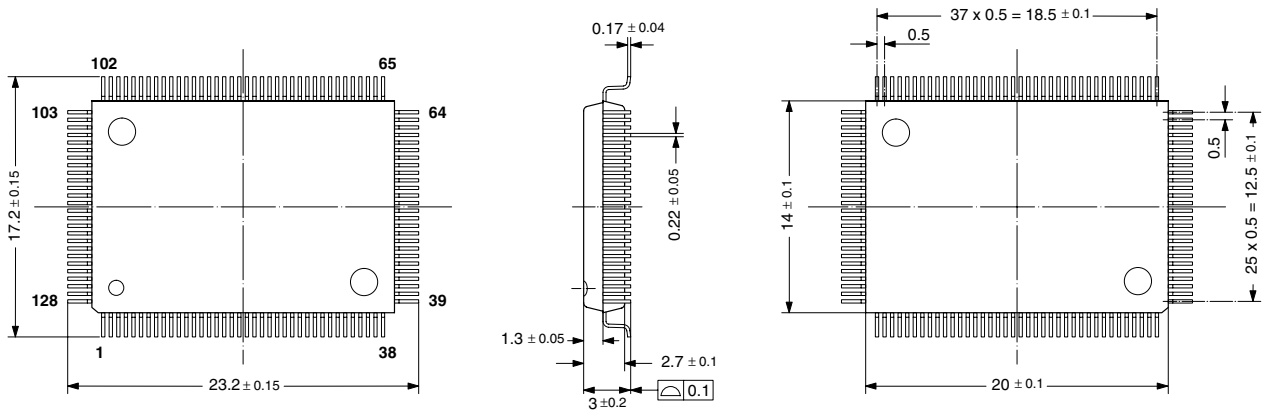

SPGS705000-3(P128)/1E

**Fig. 2-1:** PQFP128 Plastic Quad Flat Pack 128-Pin (Weight approx. 1.61g. Dimensions in mm)

2.2. Pin Assignment

Pin Functions				Not e	Pin No.
LCD Mode	Port Special Out	Port Special In	Basic Function		
SEG3.1	CC1-OUT	CC1-IN / TMS	U3.1		116
SEG3.0	CC2-OUT	CC2-IN / TDI	U3.0		117
			TEST2		118
			UVDD		119
			UVSS		120
SEG2.6	DIGIT-OUT	DIGIT-IN	U2.6		121
SEG2.5	CC1-OUT	UART0-RX	U2.5		122
SEG2.4	UART0-TX	CC1-IN	U2.4		123
SEG2.3	CC2-OUT	UART1-RX	U2.3		124
SEG2.2	UART1-TX	CC2-IN	U2.2		125
SEG7.7	CO0		U7.7/GD7	1,2	126
SEG7.6	CO1		U7.6/GD6	1,2	127
SEG7.5	LCK/(PFM1)		U7.5/GD5	1,2	128
SEG7.4	CC5-OUT	CC5-IN	U7.4/GD4	1,2	1
			FVDD	1,2	2
			FVSS	1,2	3
SEG5.3	CC4-OUT	CC4-IN	U5.3/GD3	1	4
SEG5.2	SDA1	SDA1	U5.2/GD2	1	5
SEG5.1	SCL1	SCL1	U5.1/GD1	1	6
SEG5.0	PFM0		U5.0/GD0	1	7
SEG2.1	SDA0	SDA0/CAN0-RX	U2.1		8
SEG2.0	SCL0/CAN0-TX	SCL0	U2.0		9
SEG1.7	PFM0	PINT0	U1.7		10
SEG1.6	INTRES/CO0	PINT1	U1.6		11
SEG1.5	CO1/CO0Q	PINT2	U1.5		12
		TEST			13
		RESETQ/ALARMQ			14
		XTAL2			15
		XTAL1			16
		VSS			17
		VDD			18
SEG1.4	ITSTOUT/AM-OUT		U1.4		19
SEG1.3	MTO/AM-PWM		U1.3		20
SEG1.2	INTRES/T0-OUT	MTI/ITSTIN	U1.2		21
SEG1.1	T1-OUT		U1.1		22
SEG1.0	T2-OUT		U1.0		23
SEG0.7	T3-OUT		U0.7		24
SEG0.6	CC3-OUT/T4-OUT	CC3-IN	U0.6		25
SEG0.5	CC3-OUT	PINT4	U0.5		26
SEG0.4	CO1	PINT5	U0.4		27
SEG0.3	PWM0		U0.3		28
SEG0.2	PWM1		U0.2		29
SEG0.1	PWM2		U0.1		30
SEG0.0	PWM3		U0.0		31
	SME1+/PWM4		H7.3	1	32
	SME1-/PWM6		H7.2	1	33
	SME2+/PWM8		H7.1	1	34
	SME2-/PWM9	SME-COMP	H7.0	1	35
		HVDD2	1,2		36
		HVSS2	1,2		37
	PWM8		H6.3	1,2	38
	PWM9		H6.2	1,2	39
	PWM10		H6.1	1,2	40
	PWM11		H6.0	1,2	41
	SMD1+		H5.3		42
	SMD1-		H5.2		43
		HVDD0			44
		HVSS0			45
	SMD2+		H5.1		46
	SMD2-	SMD-COMP	H5.0		47
	SMA1+		H4.3		48
	SMA1-		H4.2		49
	SMA2+		H4.1		50
	SMA2-	SMA-COMP	H4.0		51

Pin No.	Not e	Pin Functions			LCD Mode
		Basic Function	Port Special In	Port Special Out	
115		U3.2	CC0-IN / TCK	CC0-OUT	SEG3.2
114		U3.3		CO0/TDO	SEG3.3
113		U3.4	SPI0-CLK-IN	SPI0-CLK-OUT	SEG3.4
112		U3.5	SPI0-D-IN	TO3	SEG3.5
111		U3.6		SPI0-D-OUT	SEG3.6
110		U3.7	SPI1-CLK-IN	SPI1-CLK-OUT	SEG3.7
109		U4.0	SPI1-D-IN	CC0-OUT	BP0
108		U4.1	CC0-IN	SPI1-D-OUT	BP1
107		U4.2		CAN0-TX	BP2
106		U4.3	CAN0-RX	TO2	BP3
105	1,2	U8.0		CC4-OUT	SEG8.0
104	1,2	U8.1		CC3-OUT	SEG8.1
103	1,2	U8.2	LCD-CLK-IN	(CAN3-TX)	SEG8.2
102	1,2	U8.3	(CAN3-RX)	LCD-CLK-OUT	SEG8.3
101	1,2	U8.4	LCD-SYNC-IN	CAN2-TX	SEG8.4
100	1,2	U8.5	CAN2-RX/PINT3	LCD-SYNC-OUT	SEG8.5
99	1	U6.0		CAN1-TX	SEG6.0
98	1	U6.1	CAN1-RX	GOEQ	SEG6.1
97	1	U6.2		GWEEQ	SEG6.2
96	1	P2.0			
95		P2.1			
94		P0.0	CC4-IN		
93		P0.1			
92		P0.2			
91		P0.3			
90		P0.4			
89		P0.5			
88		P0.6	P0.6 Comp.		
87		P0.7			
86		WAITH			
85		WAIT			
84		BVDD			
83		AVSS			
82		AVDD			
81		VREFINT			
80		VREF			
79		P1.0	VREF0		
78		P1.1	VREF1		
77		P1.2	PINT0		
76		P1.3	PINT1		
75		P1.4	PINT2		
74		P1.5	PINT3		
73		P1.6	PINT4		
72		P1.7	PINT5		
71	1	H0.0	SMG-COMP	SMG2-/PWM7	
70	1	H0.1		SMG2+/PWM5	
69	1	H0.2		SMG1-/PWM3	
68	1	H0.3		SMG1+/PWM1	
67	1,2	HVSS3			
66	1,2	HVDD3			
65	1,2	H1.0	SMF-COMP	SMF2-	
64	1,2	H1.1		SMF2+	
63	1,2	H1.2		SMF1-	
62	1,2	H1.3		SMF1+	
61		H2.0	SMC-COMP	SMC2-	
60		H2.1		SMC2+	
59		HVSS1			
58		HVDD1			
57		H2.2		SMC1-	
56		H2.3		SMC1+	
55		H3.0	SMB-COMP	SMB2-	
54		H3.1		SMB2+	
53		H3.2		SMB1-	
52		H3.3		SMB1+	

NC = not connected, leave vacant  
 (...) = future usage

Fig. 2-2: Pin Assignment for PQFP128 Package  
 Note 1 denotes pins that are not available in future 88 pin versions.  
 Note 2 denotes pins that are not available in future 104 pin versions.




### 2.3. External Components

To provide effective decoupling and to improve EMC behavior, the small decoupling capacitors must be located as close to the supply pins as possible. The self-inductance of these capacitors and the parasitic inductance and capacitance of the interconnecting traces determine the self-resonant frequency of the decoupling network. Too low a frequency will reduce decoupling effectiveness, will increase RF emissions and may adversely affect device operation.

XTAL1 and XTAL2 quartz connections are especially sensitive to capacitive coupling from other pc board signals. It is

strongly recommended to place quartz and oscillation capacitors as close to the pins as possible and to shield the XTAL1 and XTAL2 traces from other signals by embedding them in a VSS trace.

The RESETQ pin adjacent to XTAL2 should be supplied with a small capacitor, to prevent fast RESETQ transients from being coupled into XTAL2, and to prevent XTAL2 from coupling into RESETQ.

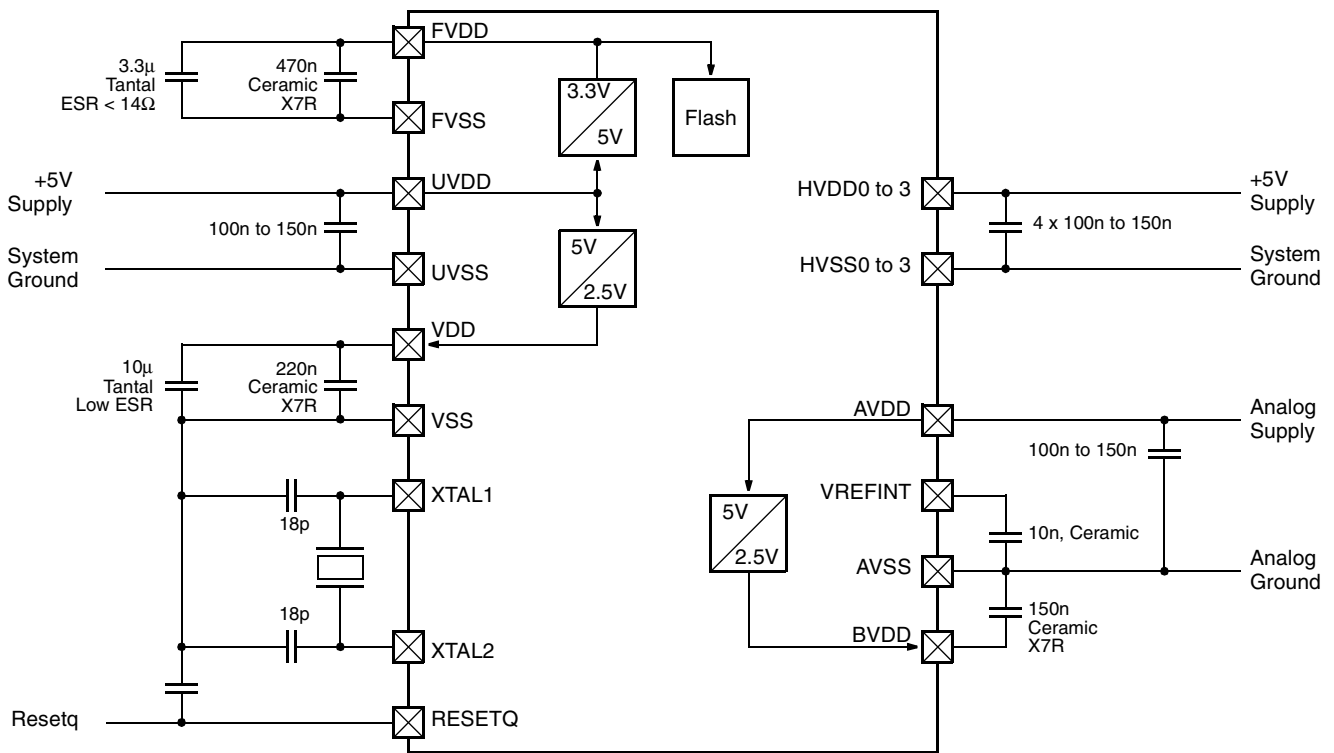

**Fig. 2-3:** CDC3207G-B: Recommended external supply and quartz connection



### 3. Electrical Data

#### 3.1. Absolute Maximum Ratings

**Table 3–1:**  $UV_{SS}=HV_{SSn}=FV_{SS}=AV_{SS}=0V$

Symbol	Parameter	Pin Name	Min.	Max.	Unit
$V_{SUP}$	Main Supply Voltage Analog Supply Voltage SM Supply Voltage	UVDD AVDD HVDD0 .. HVDD3	-0.3	6.0	V
$V_{REG}$	Flash Supply Voltage	FVDD	-0.3	4.0	V
	Core Supply Voltage PLL Supply Voltage	VDD BVDD	-0.3	3.0	V
$I_{SUP}$	Core Supply Current Main Supply Current	VDD, VSS, UVDD, UVSS	-100	100	mA
	Analog Supply Current	AVDD, AVSS	-20	20	mA
	SM Supply Current @ $T_{CASE}=105C$ , Duty Factor=0.71 <sup>1)</sup>	HVDD0 .. HVDD3 HVSS0 .. HVSS3	-250	250	mA
	Flash Supply Current	FDD, FVSS	-50	50	mA
	PLL Supply Current	BVDD	-20	20	mA
$V_{in}$	Input Voltage	U-Ports, XTAL, RESETQ, TEST, TEST2	$UV_{SS}-0.5$	$UV_{DD}+0.7$	V
		P-Ports VREF	$UV_{SS}-0.5$	$AV_{DD}+0.7$	V
		H-Ports	$HV_{SS}-0.5$	$HV_{DD}+0.7$	V
$I_{in}$	Input Current	all Inputs	0	2	mA
$I_o$	Output Current	U-Ports, RESETQ, WAITH	-5	5	mA
		H-Ports	-60	60	mA
$t_{oshsl}$	Duration of Short Circuit to UVSS or UVDD, Port SLOW Mode enabled	U-Ports, except in DP Mode		indefinite	s
$T_j$	Junction Temperature under Bias		-45	115	°C
$T_s$	Storage Temperature		-45	125	°C
$P_{max}$	Maximum Power Dissipation			0.8	W

<sup>1)</sup> This condition represents the worst case load with regard to the intended application

Stresses beyond those listed in the “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only. Functional operation of the device at these or any other conditions beyond those indicated in the “Recommended Operating Conditions/Characteristics” of this specification is not implied. Exposure to absolute maximum ratings conditions for extended periods may affect device reliability.

### 3.2. Recommended Operating Conditions

Do not insert the device into a live socket. Instead, apply power by switching on the external power supply.

Keep  $UV_{DD}=AV_{DD}$  during all power-up and power-down sequences.

Failure to comply with the above recommendations will result in unpredictable behavior of the device and may result in device destruction.

**Table 3–2:**  $UV_{SS}=HV_{SSn}=FV_{SS}=AV_{SS}=0V$

Symbol	Parameter	Pin Name	Min.	Typ	Max.	Unit
$V_{SUP}$	Main Supply Voltage Analog Supply Voltage	UVDD=AVDD	3.5	5	5.5	V
$HV_{SUP}$	SM Supply Voltage	HVDDn	4.75	5	5.25	V
$dV_{DD}$	Ripple, Peak to Peak	UVDD AVDD BVDD FVDD VDD			200	mV
$dV_{DD}/dt$	Supply Voltage Up/Down Ramping Rate	UVDD AVDD			20	V/ $\mu$ s
$f_{XTAL}$	XTAL Clock Frequency	XTAL1	4	4	5	MHz
$f_{SYS}$	CPU Clock Frequency, PLL on		For a list of available settings see Tables 4–1 and 4–2.			
$f_{BUS}$	Program Storage Clock Frequency, PLL on					
$V_{il}$ (see Table 2-2 for a list of input types and their supply voltages)	Automotive Low Input Voltage	U-Ports H-Ports P-Ports			$0.5 \times V_{DD}$	V
	CMOS Low Input Voltage	U-Ports, TEST, TEST2 H-Ports P-Ports			$0.3 \times V_{DD}$	V
$V_{ih}$ (see Table 2-2 for a list of input types and their supply voltages)	Automotive High Input Voltage	U-Ports H-Ports P-Ports	$0.86 \times V_{DD}$			V
	CMOS High Input Voltage	U-Ports, TEST, TEST2 H-Ports P-Ports	$0.7 \times V_{DD}$			V
$RV_{il}$	Reset Active Input Voltage	RESETQ			0.75	V
$RV_{im}$	Reset Inactive and Alarm Active Input Voltage	RESETQ	1.5		2.3	V
$RV_{ih}$	Reset Inactive and Alarm Inactive Input Voltage	RESETQ	3.2			V
$V_{REFi}$	Ext. ADC Reference Input Voltage	VREF	2.56		$AV_{DD}$	V
$PV_i$	ADC Port Input Voltage referenced to ext. VREF Reference	P-Ports	0		$V_{REF}$	V
	ADC Port Input Voltage referenced to int. VREFINT Reference		0		$V_{REFINT}$	

### 3.3. Characteristics

Listed are only those characteristics that are differing from Chapter 3.3 of Document “CDC32xxG-B, Automotive Controller Family User Manual, CDC3205G-B Automotive Controller” (1PD). All not differing characteristics, that are not listed here, apply, but in a  $T_{CASE}$  temperature range extended to -40 to +105C.

**Table 3–3:**  $UV_{SS}=FV_{SS}=HV_{SSn}=AV_{SS}=0V$ ,  $3.5V < AV_{DD}=UV_{DD} < 5.5V$ ,  $4.75V < HV_{DDn} < 5.25V$ ,  $T_{CASE}=-40$  to  $+105C$ ,  $f_{XTAL}=5MHz$ , external components according to Fig. 2–3 (unless otherwise noted)

Symbol	Parameter	Pin Na.	Min.	Typ <sup>1)</sup>	Max.	Unit	Test Conditions
<b>Package</b>							
$R_{thjc}$	Thermal Resistance from Junction to Case			25		C/W	
$R_{thja}$	Thermal Resistance from Junction to Ambient			60		C/W	
<b>Supply Currents</b> (CMOS levels on all inputs, i.e. $V_{il}=xV_{SS}\pm 0.3V$ and $V_{ih}=xV_{DD}\pm 0.3V$ , no loads on outputs)							
$UI_{DDp}$	UVDD PLL Mode Supply Current	UVDD			50	mA	Flash Read, $f_{SYS}=24MHz$
$UI_{DDprog}$	UVDD FAST Mode Flash Program Supply Current	UVDD			45	mA	Flash Write/Erase, all Modules OFF <sup>2)</sup>
$UI_{DDf}$	UVDD FAST Mode Supply Current	UVDD			22	mA	all Modules OFF <sup>2)</sup>
$UI_{DDs}$	UVDD SLOW Mode Supply Current	UVDD		see Fig. 3–1	1.3	mA	all Modules OFF <sup>2)</sup> <sup>3)</sup>
$UI_{DDd}$	UVDD DEEP SLOW Mode Supply Current	UVDD		see Fig. 3–1	0.8	mA	all Modules OFF <sup>3)</sup>
$AI_{DDa}$	AVDD Active Supply Current	AVDD		0.35	0.6	mA	ADC ON, PLL OFF
				1	2	mA	ADC and PLL ON, $f_{SYS}=24MHz$
$AI_{DDq}$	Quiescent Supply Current	AVDD		1	10	$\mu A$	ADC and PLL OFF, SLOW or DEEP SLOW mode
$HI_{DDq}$		Sum of all HVDDn		1	40	$\mu A$	no Output Activity, SM Module OFF
<sup>1)</sup> Typical values describe typical behaviour at room temperature (25C, unless otherwise noted), with typical Recommended Operating Conditions applied (derived from device characterization, not 100% tested).							

<sup>2)</sup> Value may be exceeded with unusual Hardware Option setting

<sup>3)</sup> Measured with external clock. Add 120 $\mu A$  for operation on typical quartz with SR0.XTAL=0 (Oscillator RUN mode).

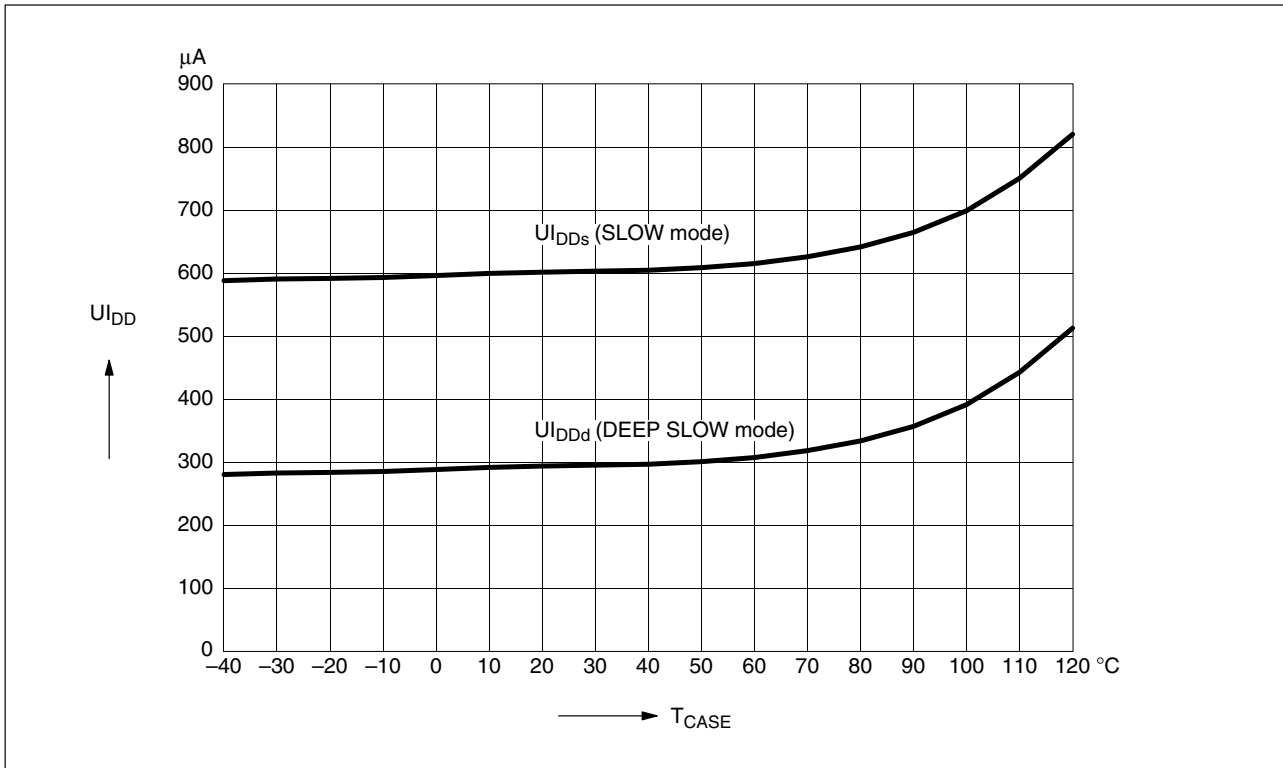


Fig. 3–1: Typical UI<sub>DDs</sub> and UI<sub>DDd</sub> characteristics over temperature @ f<sub>XTAL</sub>=4MHz, 5V

### 3.4. Recommended Quartz Crystal Characteristics

See Chapter 3.4 of document “CDC32xxG-B, Automotive Controller Family User Manual, CDC3205G-B Automotive Controller” (1PD).

## 4. CPU and Clock System

### 4.1. Recommended Register Settings

Other settings for PMF, IOP and WSR than those given in Tables 4–1 and 4–2 shall not be used and may result in undefined behaviour. It is required not to operate I/O faster than Flash.

Suppression Strength (SUP) and Clock Tolerance (TOL) may be varied between zero and the values for strong settings according to the rules in Section 4.4.2 of the CDC32xxG-B Family User Manual. The given limits must not be exceeded

**Table 4–1:** PLL and ERM Modes: Recommended Settings and Resulting Operating Frequencies (MHz)

f <sub>XTAL</sub>	CPU		Flash		I/O		ERM.C.EOM = 1						ERM.C.EOM = 2 or 3					
							Weak		Normal		Strong		Weak		Normal		Strong	
	f <sub>sys</sub>	PLL.C. PMF	f <sub>bus</sub>	WSR	f <sub>IO</sub> =f <sub>0</sub>	IOC. IOP	SUP	TOL	SUP	TOL	SUP	TOL	SUP	TOL	SUP	TOL	SUP	TOL
4	8	1	8	0x00	8	0	0	4	0	7	0	11	4	2	7	4	11	6
	16	3	8	0x11	8	1	0	8	0	14	0	15	8	4	14	7	22	11
	24	5	8	0x22	8	2	0	12	0	15	0	15	12	6	21	11	31	12
			12	0x11			0	10	0	10	12	2	21	2	33	2		
	32	7	8	0x33	8	3	0	12	0	12	0	12	16	8	28	12	31	12
			10.67	0x22			0	12	0	12	16	8	19 23 28	9 7 6	19 23 37	9 7 6		
5	10	1	10	0x00	10	0	0	5	0	8	0	14	5	3	8	4	14	7
	20	3	10	0x11	10	1	0	10	0	15	0	15	10	5	17	8	28	8
	30	5	10	0x22	10	2	0	14	0	14	0	14	15	8	24 26	12 11	28 30 35	10 9 8

**Table 4–2:** PLL2 and ERM Modes: Settings Sacrificing Unlimited Operation of Peripheral Modules and Resulting Operating Frequencies (MHz)

f <sub>XTAL</sub>	CPU		Flash		I/O		ERM.C.EOM = 1						ERM.C.EOM = 2 or 3					
							Weak		Normal		Strong		Weak		Normal		Strong	
	f <sub>sys</sub>	PLL.C. PMF	f <sub>bus</sub>	WSR	f <sub>IO</sub> =f <sub>0</sub>	IOC. IOP	SUP	TOL	SUP	TOL	SUP	TOL	SUP	TOL	SUP	TOL	SUP	TOL
4	12	2	6	0x11	4	2	0	6	0	10	0	15	6	3	10	5	16	8
			12	0x00			0	5	0	5	6	2	10	2	16	2		
	20	4	10	0x11	4	4	0	10	0	15	0	15	10	5	17	8	28	8
5	15	2	7.5	0x11	5	2	0	7	0	13	0	15	7	4	13	7	21	11





### 5. Memory and Boot System

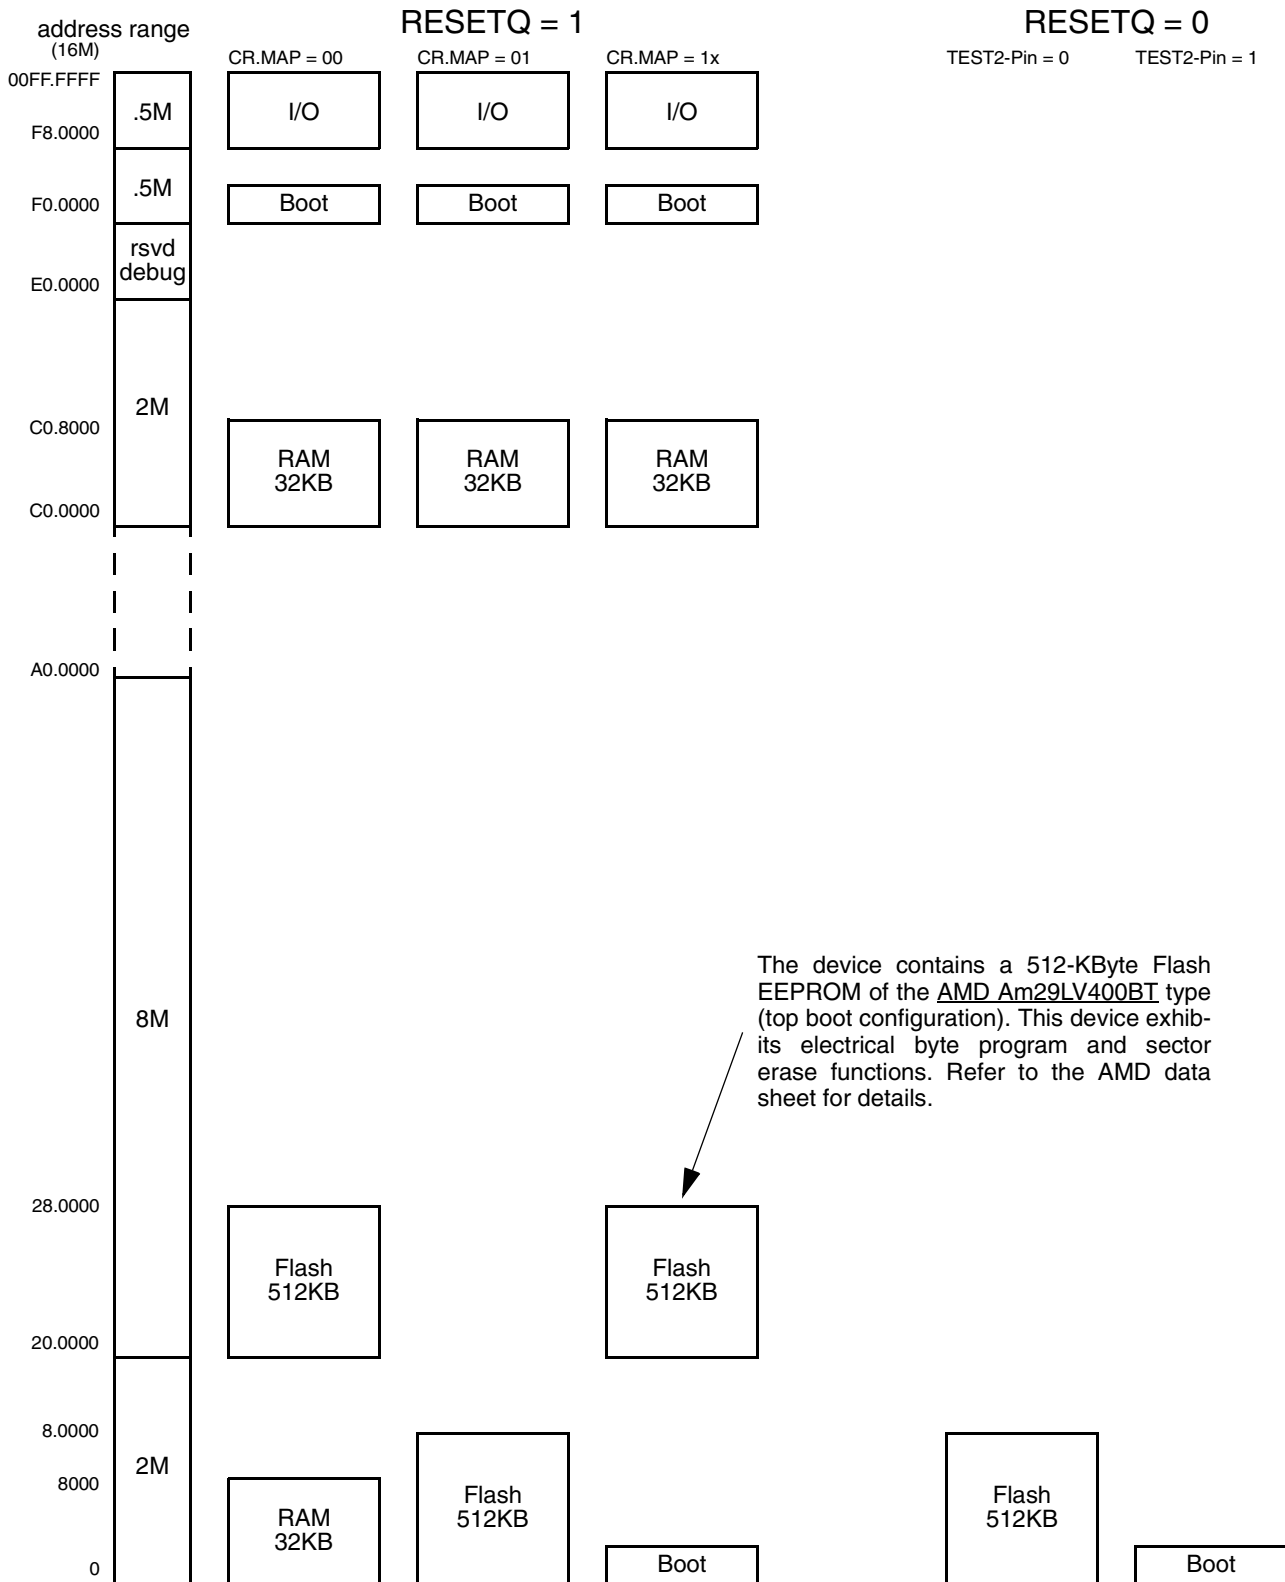


Fig. 5-1: Address Map. Most Common Settings



## 6. Core Logic

### 6.1. Control Word CW

Some system configuration items are freely selectable during device start-up by means of a unique Control Word (CW).

#### 6.1.1. Reset Active

During Reset, the device fetches this CW from address locations 0x20 to 0x23 of a source that is determined by the state of pins TEST and TEST2, see Table 6–1 for MCM and ROM parts.

#### 6.1.2. Reset Inactive

When exiting Reset, the CW is loaded into the Control Register (CR) and the system will start up according to the configuration defined therein.

Normally the CW is fetched from the same memory that the system will later start executing code from. Table 6–2 gives fix CWs for a list of the most commonly used configurations.

**Table 6–1:** CW fetch in MCM and ROM parts (QFP128)

Control Word Fetch desired from	Necessary Reset config. of pins	
	TEST2	TEST
Internal ROM/Flash	0	0
External via Multi Function port	0	1
Internal Boot ROM	1	x

**Table 6–2:** Some common system configurations and the corresponding CW setting

Part Type	Program Start desired from	Additional desired properties	Necessary CW	
			31:16	15:0
MCM	int. 16-Bit Flash (Am29LV400BT)	-	Don't care	0x7F5F
ROM	int. 16-Bit ROM	-	Don't care	0x7F5F



## 7. Hardware Options

### 7.1. Functional Description

Hardware Options are available in several areas to adapt the IC function to the host system requirements. For details see the CDC32xxG-B Family User Manual.

Hardware Option setting requires two steps:

1. selection is done by programming dedicated address locations in the HW Options field with the desired options' code.
2. activation is done by copying the HW Options field to the corresponding HW Options registers at least once after each reset.

All HW Options except those listed in table 7–1 are SW programmable.

**Table 7–1: Port, Clock and CM Option Programmability**

IC Type	IC Name	Port Opt.	Clock Opt.	CM.WC M setting
MCM	CDC3207G-B	SW	SW	set to 0
Mask	ROM Part	SW	mask	mask

In mask ROM derivatives the clock options and the Watchdog, Clock and Supply Monitors are hard wired according to the HW Options field of the ROM code hex file. Those options can only be altered by changing a production mask.

To ensure compatible option settings in this IC and mask ROM derivatives when run with the same ROM code, it is mandatory to always write the HW Options field to the HW option registers directly after reset.



## 8. Differences

This chapter describes differences of this document to predecessor document "CDC3207G-B V3.0 Automotive Controller Specification" (6251-578-1A)

#	Section	Description
1	Introduction	Example Mask ROM Part replaced by CDC3272G-B, T <sub>CASE</sub> extended.
2	Electrical Characteristics	Abs. Max. Ratings: editorial corrections.
		Rec. Op. Conditions: editorial corrections.
		Characteristics: <ul style="list-style-type: none"> <li>– variuos editorial changes</li> <li>– changed definition: U<sub>DDs</sub>, U<sub>DDd</sub></li> <li>– changed value: U<sub>DDs</sub>, U<sub>DDd</sub> T<sub>CASE</sub> range</li> </ul>
3	CPU and Clock System	F <sub>SYS</sub> max. reduced.
4	Memory and Boot System	Correected upper Flash address.
5	Differences	New

## 9. Data Sheet History

1. Preliminary Data Sheet: "CDC 3207G-B Automotive Controller", Nov. 28, 2002, 6251-578-1PD. First release of the preliminary data sheet.

Micronas GmbH  
Hans-Bunte-Strasse 19  
D-79108 Freiburg (Germany)  
P.O. Box 840  
D-79008 Freiburg (Germany)  
Tel. +49-761-517-0  
Fax +49-761-517-2174  
E-mail: docservice@micronas.com  
Internet: www.micronas.com

Printed in Germany  
Order No. 6251-578-1PD

All information and data contained in this data sheet are without any commitment, are not to be considered as an offer for conclusion of a contract, nor shall they be construed as to create any liability. Any new issue of this data sheet invalidates previous issues. Product availability and delivery are exclusively subject to our respective order confirmation form; the same applies to orders based on development samples delivered. By this publication, Micronas GmbH does not assume responsibility for patent infringements or other rights of third parties which may result from its use.

Further, Micronas GmbH reserves the right to revise this publication and to make changes to its content, at any time, without obligation to notify any person or entity of such revisions or changes.

No part of this publication may be reproduced, photocopied, stored on a retrieval system, or transmitted without the express written consent of Micronas GmbH.