



Woofer ARN-130-02/4

A direct - radiator electrodynamic to radiate the lower and medium frequencies mainly in loudspeaker systems.

ACOUSTICAL DATA

Rated noise power ¹⁾	60	W
Short term maximum power ²⁾	100	W
Rated impedance	4	Ohm
Resonance frequency F_s ⁴⁾	45.000	Hz
Rated frequency range	45-5000	Hz
Sensitivity ³⁾	85	dB

TS PARAMETERS

Acquired by MLSSA	D-0-10	
Effective piston area S_d	72.380	cm ²
DC resistance of voice coil R_e	4.007	Ohm
Mechanical Q factor Q_{ms}	1.650	
Electrical Q factor Q_{es}	0.430	
Total Q factor Q_{ts}	0.341	
Voice coil inductance L_e	0.385	
Equivalent volume V_{as}	8.804	l
Moving mass (including air load) M_{ms}	7.461	g
Suspension compliance C_{ms}	1196.465	uM/Newton
Force factor Bl	4.824	Tm
Maximum linear displacement X_{max} ⁵⁾	8.5	mm

MECHANICAL DATA

Voice coil carrier material	aluminium	
Voice coil diameter	25.4	mm
Winding height of voice coil	13	mm
Yoke diameter	25	mm
Air gap height	4.5	mm
Magnet external diameter	82	mm
Magnet internal diameter	33	mm
Magnet height	17	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	0.8	kg

1) DIN IEC 268-5, closed box 5 dm³


2) CSN IEC 268-5, closed box 5 dm³

3) CSN IEC 268-5, standard baffle 1 W, 1 m, 200-4000 Hz


4) ±20%

5) Peak - peak

Frequency response

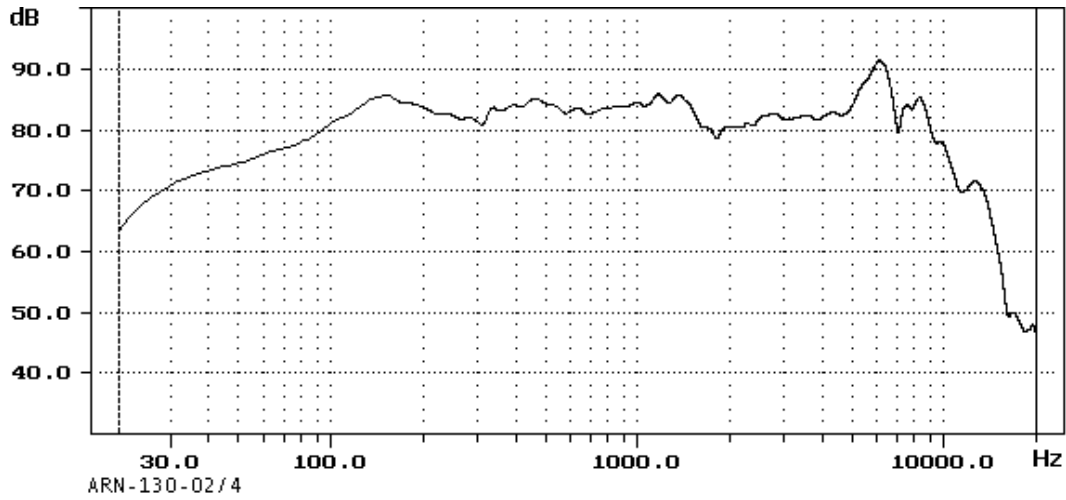

Impedance Magnitude

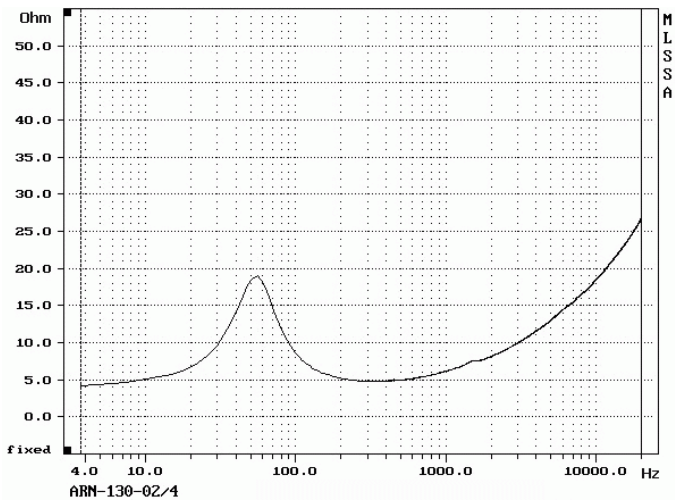

Drawing

