



## Car speaker ARX-130-21/4

Two-band loudspeaker to radiate whole band of audible frequencies for sound-tracking of interior of cars.

### ACOUSTICAL DATA

|  |            |     |
|--|------------|-----|
| Rated noise power <sup>1)</sup>        | 10         | W   |
| Short term maximum power <sup>2)</sup> | 75         | W   |
| Rated impedance                        | 4          | Ohm |
| Resonance frequency $F_s$              | -          | Hz  |
| Rated frequency range                  | 70 - 20000 | Hz  |
| Sensitivity <sup>3)</sup>              | 88         | dB  |

### MECHANICAL DATA


|                                       |           |    |
|---------------------------------------|-----------|----|
| Voice coil carrier material           | aluminium |    |
| Voice coil diameter                   | 18.4      | mm |
| Winding height of voice coil          | 5.2       | mm |
| Yoke diameter                         | 18        | mm |
| Air gap height                        | 3.5       | mm |
| Magnet external diameter              | 60        | mm |
| Magnet internal diameter              | 26        | mm |
| Magnet height                         | 13        | mm |
| Compensating magnet external diameter | -         | mm |
| Compensating magnet internal diameter | -         | mm |
| Compensating magnet height            | -         | mm |
| Weight                                | 0.42      | kg |

1) DIN IEC 268-5, closed box 5 dm<sup>3</sup>

2) DIN IEC 268-5, closed box 5 dm<sup>3</sup>

3) DIN IEC 268-5, standard baffle, 1 W, 1 m, 200 - 10000 Hz

Frequency response

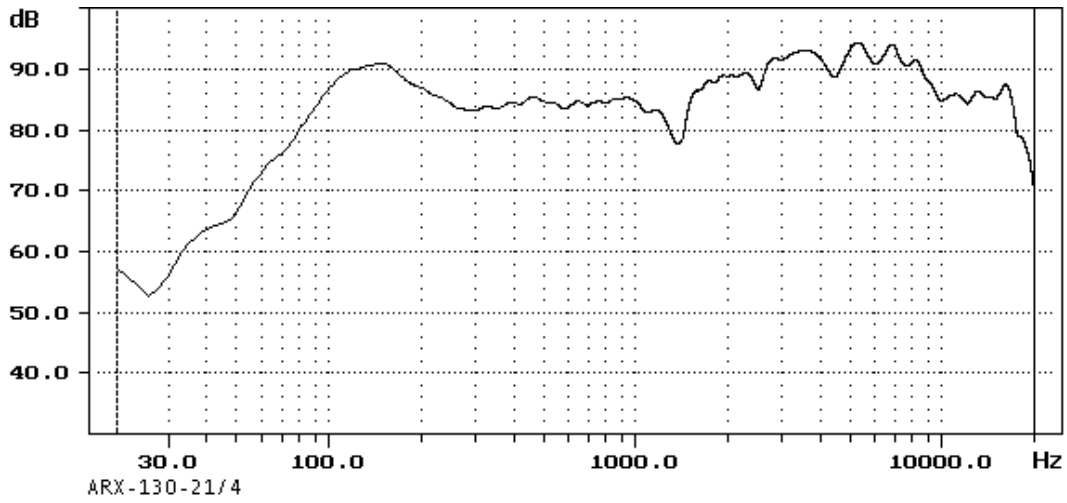

Drawing

