

## Specification

Nominal Basket Diameter	10", 254mm
Nominal Impedance*	8 ohms
Power Rating**	150W
Resonance	51Hz
Usable Frequency Range	48Hz-7kHz
Sensitivity***	93.5
Magnet Weight	4 oz.
Gap Height	0.28", 7.2mm
Voice Coil Diameter	2", 50.8mm

## Thiele & Small Parameters

Resonant Frequency (fs)	51Hz
DC Resistance (Re)	5.46
Coil Inductance (Le)	0.55mH
Mechanical Q (Qms)	17.5
Electromagnetic Q (Qes)	0.52
Total Q (Qts)	0.51
Compliance Equivalent Volume (Vas)	49 liters / 1.7 cu. ft.
Peak Diaphragm Displacement Volume (Vd)	126cc
Mechanical Compliance of Suspension (Cms)	0.27mm/N
BL Product (BL)	11.2 T-M
Diaphragm Mass inc. Airload (Mms)	37 grams
Efficiency Bandwidth Product (EBP)	98
Maximum Linear Excursion (Xmax)	3.5mm
Surface Area of Cone (Sd)	360.7 cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	7.0mm

## Mounting Information

Recommended Enclosure Volume	
Sealed	17-23 liters/ 0.6-0.8 cu.ft.
Vented	23-54 liters/ 0.8-1.9 cu.ft.
Overall Diameter	10.25", 260.4mm
Baffle Hole Diameter	9.13", 231.9mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	0.28", 7.0mm
Mounting Holes B.C.D.	9.73", 247.1mm
Depth	4.75", 121mm
Net Weight	3.6 lbs., 1.6 kg
Shipping Weight	4.7 lbs., 2.1 kg


## Materials of Construction

Copper voice coil  
Polyimide former  
Neodymium magnet  
Non-vented core  
Die-cast aluminum basket  
Aluminum Alloy Cone  
Cloth cone edge  
Solid composition felt dust cap



## BASSLITE® CA2010

Recommended for bass guitar. Excellent in either sealed or vented enclosures. Nice, tight, top end.

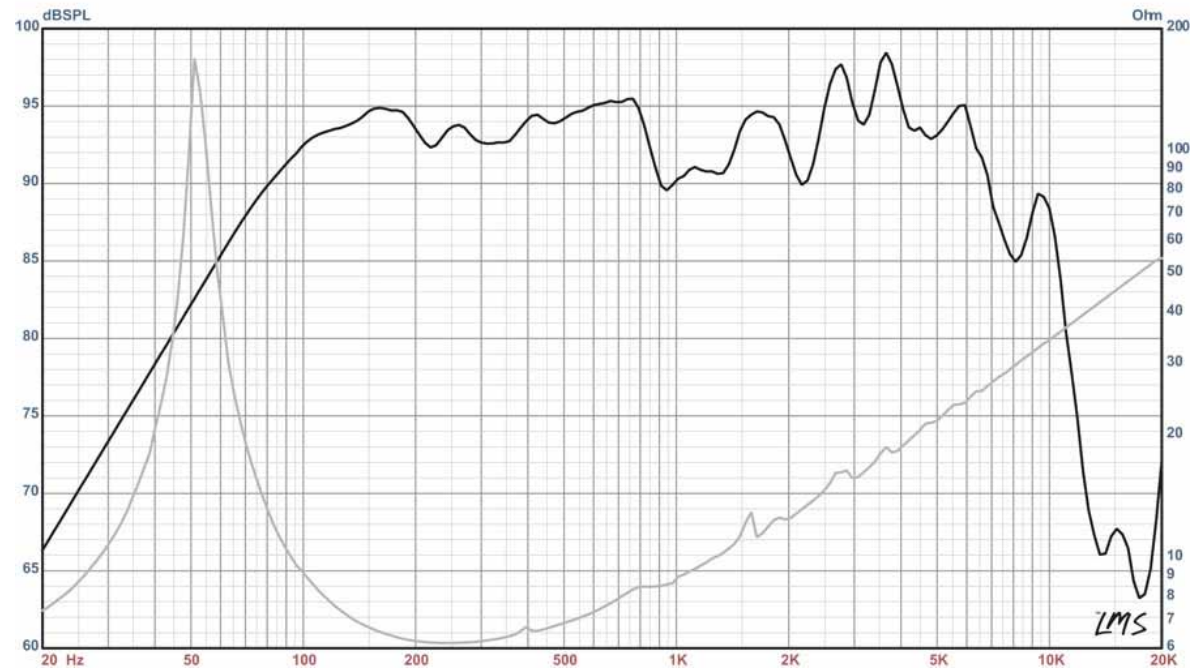

\* Please inquire about alternative impedances.

\*\* Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

\*\*\* The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)