


## FAST RECOVERY RECTIFIER DIODES

- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING

### SUITABLE APPLICATIONS

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.

(Metric thread)


**DO 5**  
 (Metal)

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
$I_{FRM}$	Repetitive Peak Forward Current	$t_p \leq 10\mu s$	A
$I_{F(RMS)}$	RMS Forward Current		A
$I_{F(AV)}$	Average Forward Current	$T_{case} = 80^\circ C$ $\delta = 0.5$	A
$I_{FSM}$	Surge non Repetitive Forward Current	$t_p = 10ms$ sinusoidal	A
P	Power Dissipation	$T_{case} = 80^\circ C$	W
$T_{stg}$ $T_j$	Storage and Junction Temperature Range	- 40 to + 150	$^\circ C$

Symbol	Parameter	BYT 60-			Unit
		200	300	400	
$V_{RRM}$	Repetitive Peak Reverse Voltage	200	300	400	V
$V_{RSM}$	Non Repetitive Peak Reverse Voltage	220	330	440	V

### THERMAL RESISTANCE

Symbol	Test Conditions	Value	Unit
$R_{th(j-c)}$	Junction-case	0.7	$^\circ C/W$

**ELECTRICAL CHARACTERISTICS**

**STATIC CHARACTERISTICS**

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$I_R$	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			60	$\mu\text{A}$
	$T_j = 100^\circ\text{C}$				10	$\text{mA}$
$V_F$	$T_j = 25^\circ\text{C}$	$I_F = 60\text{A}$			1.5	V
	$T_j = 100^\circ\text{C}$				1.4	

**RECOVERY CHARACTERISTICS**

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$t_{rr}$	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$	$di_F/dt = -15\text{A}/\mu\text{s}$	$V_R = 30\text{V}$		100	ns
		$I_F = 0.5\text{A}$	$I_R = 1\text{A}$	$I_{rr} = 0.25\text{A}$		50	

**TURN -OFF SWITCHING CHARACTERISTICS (Without Series Inductance)**

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$t_{IRM}$	$di_F/dt = -240\text{A}/\mu\text{s}$	$V_{CC} = 200\text{V}$ $I_F = 60\text{A}$ $L_p \leq 0.05\mu\text{H}$ $T_j = 100^\circ\text{C}$ See Figure 11			75	ns
	$di_F/dt = -480\text{A}/\mu\text{s}$			50		
$I_{RM}$	$di_F/dt = -240\text{A}/\mu\text{s}$				18	A
	$di_F/dt = -480\text{A}/\mu\text{s}$			24		

**TURN -OFF OVERVOLTAGE COEFFICIENT (With Series Inductance)**

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$C = \frac{V_{RP}}{V_{CC}}$	$T_j = 100^\circ\text{C}$	$V_{CC} = 120\text{V}$	$I_F = I_{F(AV)}$ See note		3		
	$di_F/dt = -60\text{A}/\mu\text{s}$	$L_p = 1.3\mu\text{H}$	See Figure 12				

Note : Applicable to BYT 60-400 only

To evaluate the conduction losses use the following equations :

$$V_F = 1.1 + 0.0045 I_F \qquad P = 1.1 \times I_{F(AV)} + 0.0045 I_F^2_{(RMS)}$$

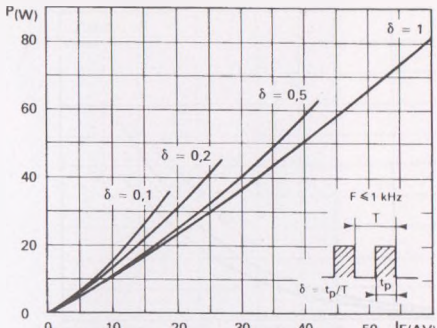


FIGURE 1 : Low frequency power losses versus average current

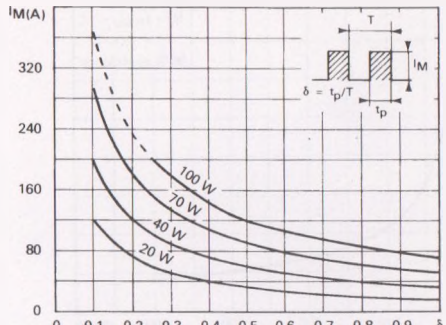


FIGURE 2 : Peak current versus form factor.

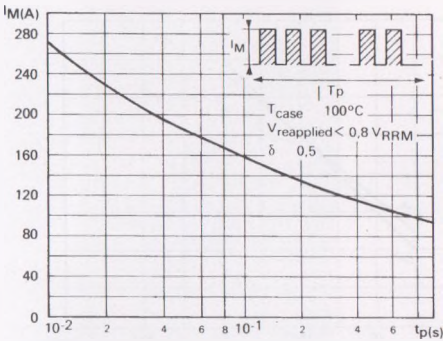


FIGURE 3 : Non repetitive peak surge current versus overload duration

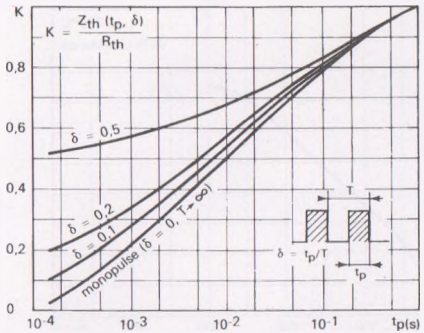


FIGURE 4 : Thermal impedance versus pulse width.

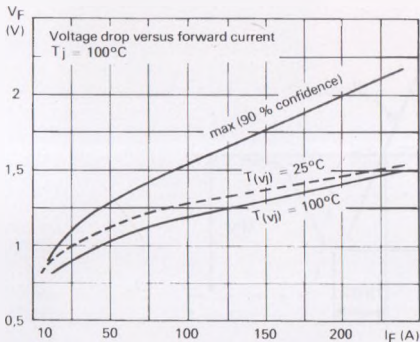


FIGURE 5 : Voltage drop versus forward current.

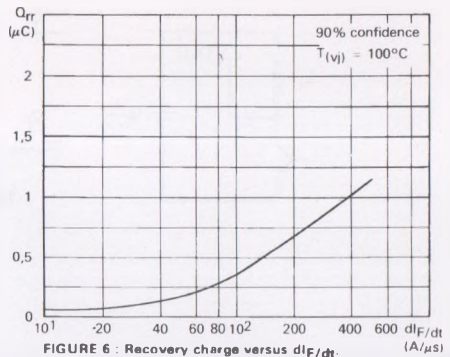


FIGURE 6 : Recovery charge versus  $dI_F/dt$ .

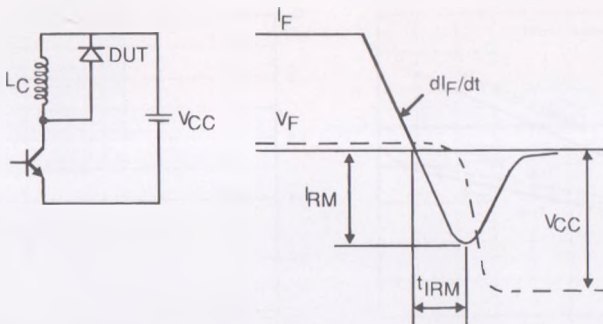
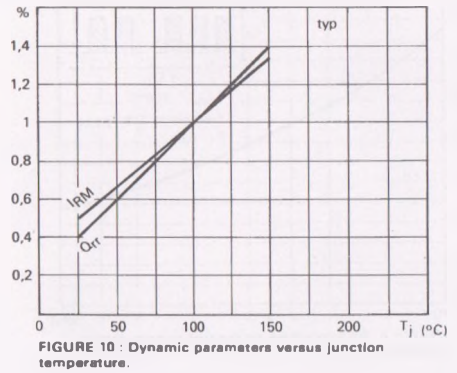
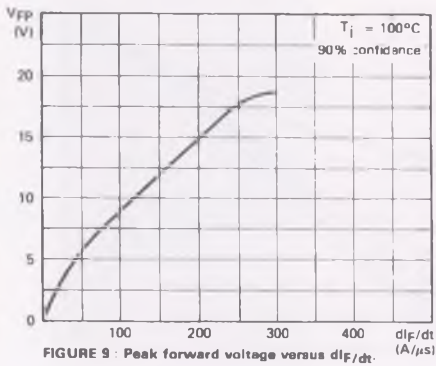
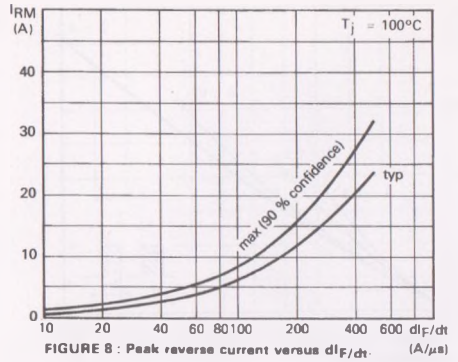
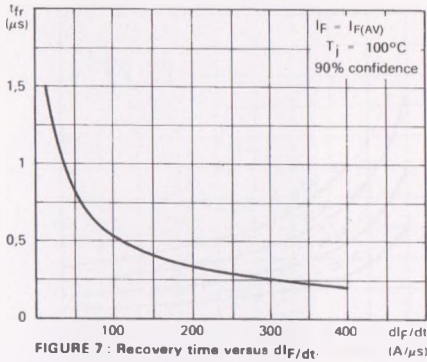


Figure 11 : Turn-off switching characteristics (without series inductance).

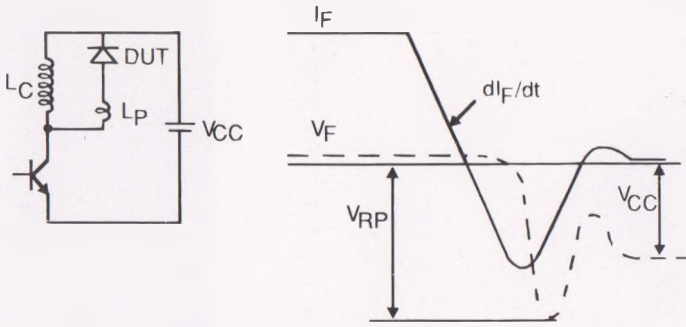


Figure 12 : Turn-off switching characteristics (with series inductance).