

## SPECIFICATION

Nominal Basket Diameter	12", 304.80mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	250W
Music Program	500W
Resonance	47Hz
Usable Frequency Range***	66Hz-3kHz
Sensitivity	96.40
Magnet Weight	38 oz.
Gap Height	0.31", 7.92mm
Voice Coil Diameter	2", 50.80mm

## THIELE & SMALL PARAMETERS

Resonant Frequency (fs)	47Hz
DC Resistance (Re)	5.57
Coil Inductance (Le)	1.01mH
Mechanical Q (Qms)	6.69
Electromagnetic Q (Qes)	0.51
Total Q (Qts)	0.48
Compliance Equivalent Volume (Vas)	161.00 liters / 5.70 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	186.00cc
Mechanical Compliance of Suspension (Cms)	0.40mm/N
BL Product (BL)	10.00 T-M
Diaphragm Mass inc. Airlod (Mms)	34 grams
Efficiency Bandwidth Product (EBP)	84.00
Maximum Linear Excursion (Xmax)	3.50mm
Surface Area of Cone (Sd)	532.40 cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	10.40mm

## MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	42.5-28 liters/1.00-1.50 cu.ft.
Vented	37-71 liters/1.30-2.50 cu.ft.
Overall Diameter	12.03", 305.50mm
Baffle Hole Diameter	10.95", 278.10mm
Front Sealing Gasket	Fitted as standard
Rear Sealing Gasket	Fitted as standard
Mounting Holes Diameter	0.25", 6.40mm
Mounting Holes B.C.D.	11.59", 294.30mm
Depth	4.47", 114mm
Net Weight	7.80 lbs., 3.50 kg
Shipping Weight	10.00 lbs., 4.50 kg


## MATERIALS OF CONSTRUCTION

Copper voice coil  
 Polyimide former  
 Ferrite magnet  
 Extended core  
 Pressed steel basket  
 Paper Cone  
 Cloth cone edge  
 Screened cloth dust cap



## BETA-12CX AMERICAN STANDARD SERIES

Recommended for professional audio as a mid-bass in either vented, or sealed satellite or floor monitor enclosures. Also works nicely in vented two-way enclosures used for small coverage areas.

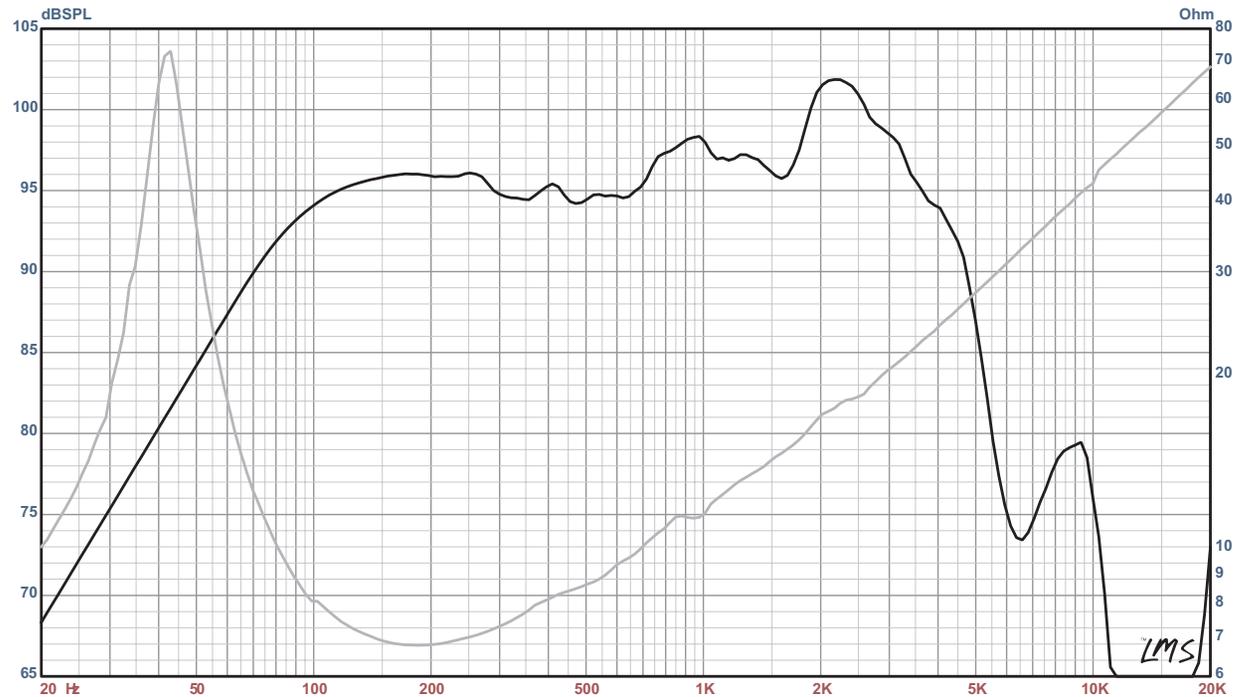

\* Please inquire about alternative impedances.

\*\* Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

\*\*\* The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)