

BL12-200X




Not every player wants a super-clean, high-fidelity bass sound.

Characterised by an extended low end and greater linear excursion, Green Label speakers push out every note with a rich, warm tone and a powerful low-end thump.

Available with Ferrite or Neodymium magnets, Green Label speakers are primed for high-powered rock performances, where a full-bodied, warm, defined tone is essential.

8 Ω Frequency Response

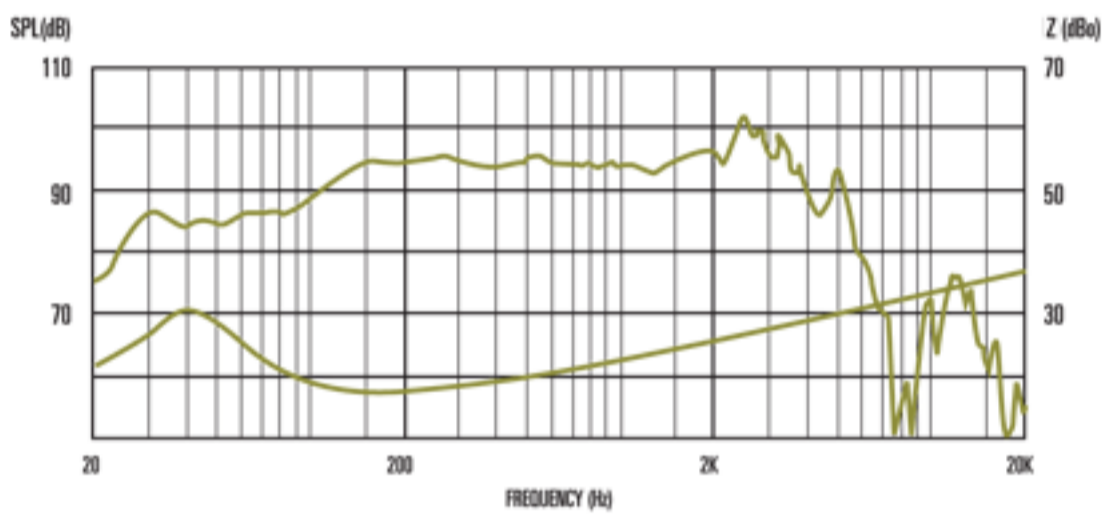

General Specifications

Nominal diameter	304.8mm/12in
Power rating	200Wrms
Nominal impedance	8 Ω
Sensitivity	94dB
Magnet type	Ferrite
Voice coil diameter	50.8mm/2in
Coil material	Copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Surround material	Cloth-sealed
Frequency range	45-3500Hz
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.26m/10.24in
Fs	45Hz
Mair	6.92g/0.244oz
Mmd	40.57g/1.43oz
Qms	2.74
Qes	0.49
Qts	0.42
Re	5.88 Ω
Vas	104.64lt/3.7ft3
Bl	12.71Tm
Cms	0.26mm/N
Rms	4.92kg/s
Le (at 1kHz)	1.0mH

Mounting Information

Cut-out diameter	283mm/11.1in
Diameter	309mm/12.2in
Mounting slot dimensions	Ø7.9mm/0.31in
Mounting slot PCD	297mm/11.7in
Number of mounting slots	4
Overall depth	130mm/5.1in
Unit weight	3.2kg/7lb