

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BL15-300X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

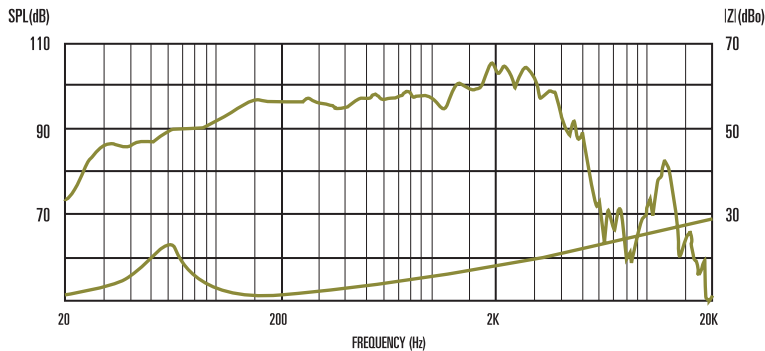

General Parameters

Nominal diameter	381mm/15in
Power Rating (rms)	300W
Nominal impedance	4Ω
Voice coil diameter	63.5mm/2.5in
Magnet type	Ferrite
Sensitivity	96dB
Frequency range	42-3500Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4.25mm/0.16in
Gap depth	8mm/0.31in
Voice coil winding width	16.5mm/0.64in

Small Signal Parameters

D	0.33m/12.99in
Fs	48.1Hz
Mmd	68.24g/2.41oz
Mair	14.15g/0.499oz
Qms	2.989
Qes	1.004
Qts	0.751
Re	3.15Ω
Vas	137.69lt/4.86ft ³
Bl	8.83Tm
Cms	0.133mm/N
Rms	8.327kg/s
Le	0.47mH

Mounting Information

Diameter	385mm/15.2in
Overall depth	162mm/6.4in
Cut-out diameter	351mm/13.8in
Mounting slot dimensions	9.2 x 6.2mm/0.36 x 0.24in
Number of mounting slots	8
Mounting slot PCD	369mm/14.5in
Unit weight	4.8kg/10.6lb

Unit conditioned prior to measurement.