

# CDX20-3000

Neodymium magnet compression driver

## General Specifications

Power rating <sup>1</sup> . . . . .	75Wrms
Nominal impedance . . . . .	8Ω
Sensitivity <sup>2</sup> . . . . .	107dB
Frequency range . . . . .	500-18,000Hz
Recommended min. crossover (12dB/oct) . . . . .	800Hz
Voice coil diameter . . . . .	75mm/3in
Voice coil material . . . . .	Edgewound copper clad aluminium
Magnet type . . . . .	Neodymium
Diaphragm material . . . . .	Titanium
Surround material . . . . .	Polyimide

## Mounting Information

Width . . . . .	125mm/5.0in
Depth . . . . .	94mm/3.7in
Weight . . . . .	2.0kg/4.4lb
Fitting . . . . .	Flange (4 x M6 holes on 102mm/4in PCD)
Throat exit . . . . .	50.8mm/2in

## Packed Dimensions & Weight



Single pack size W x D x H . . . . .	140mm x 135mm x 112mm
Single pack weight . . . . .	2.4kg/5.3lb
Multi pack (6) size W x D x H . . . . .	500mm x 365mm x 145mm
Multi pack (6) weight . . . . .	13.5kg/29.7lb



## Features

- 2" exit, neodymium magnet, 3" voice coil compression driver provides 75Wrms (AES standard) power handling and 107dB sensitivity
- Patented phase plug design method suppresses cavity resonances at higher frequencies
- Titanium diaphragm, deep drawn to increase stiffness and reduce distortion
- Lower compression ratio reduces air non-linearity and allows for higher maximum SPL
- Rolled polyimide surround improves stiffness control, further lowering distortion
- Curved coherent wavefront, optimised for horn loading

## Frequency Response and Impedance Curves

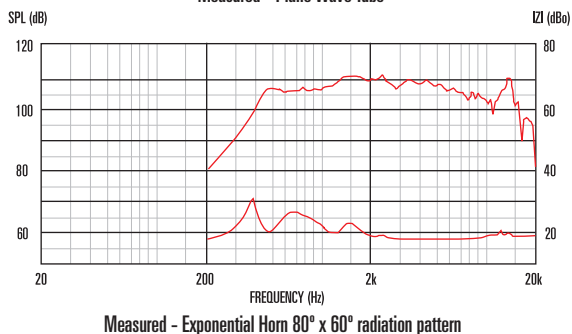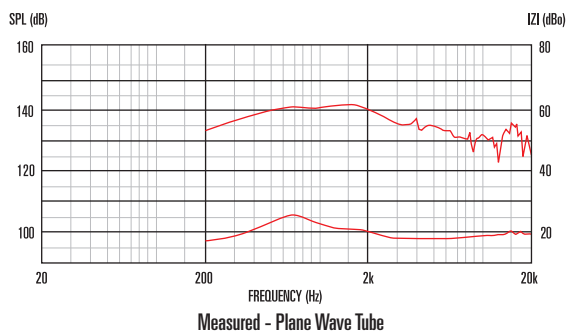

1. Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.  
2. Measured on axis at 1W, 1m, using typical horn, in 2π anechoic environment.