

## Specification

Nominal Basket Diameter	15", 381mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	250W
Music Program	
Resonance	50Hz
Usable Frequency Range***	57Hz-5.5kHz
Sensitivity	100
Magnet Weight	56oz
Gap Height	.39", 10.01mm
Voice Coil Diameter	2.5", 63.5mm

## Thiele & Small Parameters

Resonant Frequency (fs)	50Hz
DC Resistance (Re)	5.7
Coil Inductance (Le)	0.57
Mechanical Q (Qms)	7.65
Electromagnetic Q (Qes)	0.73
Total Q (Qts)	0.67
Compliance Equivalent Volume (Vas)	167.20 ltr./5.90 cuft
Peak Diaphragm Displacement Volume (Vd)	121.00cc
Mechanical Compliance of Suspension (Cms)	.16mm/N
BL Product (BL)	12.5 T-M
Diaphragm Mass inc. Airload (Mms)	63.1 grams
Efficiency Bandwidth Product (EBP)	69
Maximum Linear Excursion (Xmax)	1.4mm
Surface Area of Cone (Sd)	864.6cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	8.0mm

## Mounting Information

Recommended Enclosure Volume	
Sealed	42-85 liters / 1.5-3.0 cuft
Vented	48-122 liters / 1.7-4.3 cuft
Overall Diameter	15.15", 384.81mm
Baffle Hole Diameter	13.84", 351.54mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	.25", 6.35mm
Mounting Holes B.C.D.	14.56", 369.82mm
Depth	6.63", 168.40mm
Net Weight	12.30 lbs, 5.58 kg
Shipping Weight	


## Materials of Construction

Coil Construction	Aluminum
Coil Former	Polyimide
Magnet Composition	Ferrite
Motor Details	Vented Core
Basket Material	Steel
Cone Composition	Treated Paper
Cone Edge Composition	Sealed Cloth
Dust Cap Composition	Treated Paper



## EBG-S2515

15" Pro sound Driver for Bass Guitar or PA Mid Bass. Extended Top end performance.

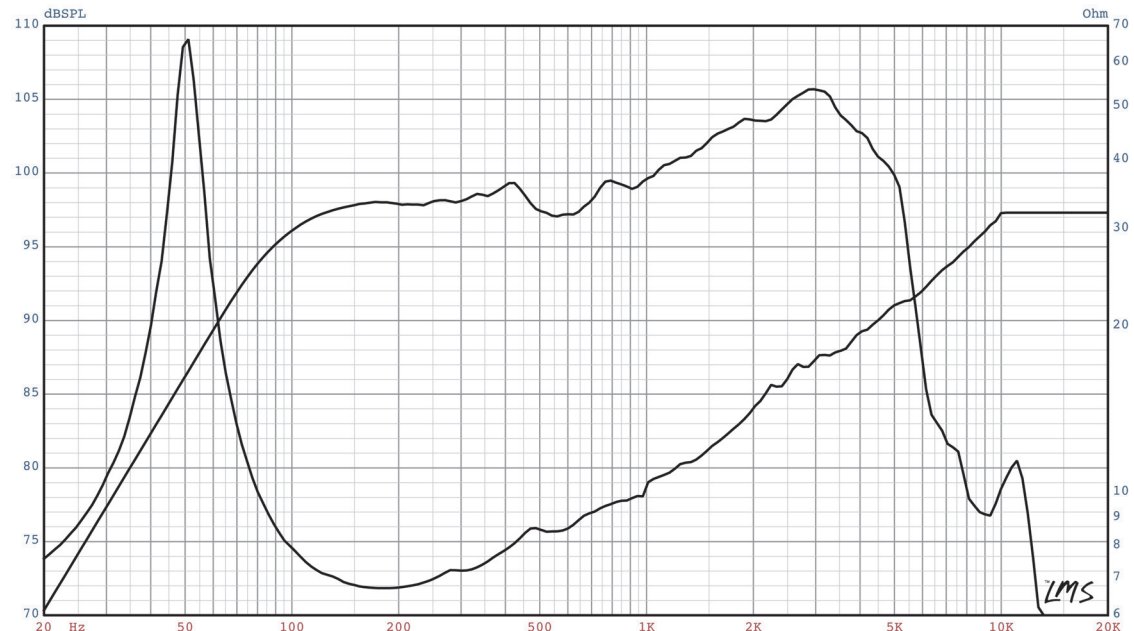

\* Please inquire about alternative impedances.

\*\* Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

\*\*\* The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)