



857-B

857-B

# HALF-WAVE MERCURY-VAPOR RECTIFIER

## GENERAL DATA

### Electrical:


Filamentary Cathode, Coated:

Voltage. . . . .	5 ± 5%	ac volts
Current. . . . .	30	amp
Minimum heating time at rated voltage . . . . .	60	sec
Peak Tube Voltage Drop (Approx.) . . . . .	15	volts

### Mechanical:

Terminal Connections:

F<sub>1</sub> - Filament  
(Insulated)



F<sub>2</sub> - Filament,  
Cathode Shield,  
Shell (Anode  
Return)  
Cap - Anode

Mounting Position. . . . .	Vertical with filament end down
Maximum Overall Length (Including flexible leads) . . . . .	29-7/8"
Seated Length. . . . .	19-1/2" ± 3/8"
Maximum Diameter . . . . .	7-1/8"
Weight (Approx.) . . . . .	4 lbs
Bulb . . . . .	GT-56
Cap. . . . .	Skirted Large (JETEC No.C1-10)
Base . . . . .	Terminal-Support Shell (JETEC No.F0-2)

### Temperature Control:

**Heating**--When the ambient temperature is so low that the normal rise of condensed-mercury temperature above the ambient temperature will not bring the condensed-mercury temperature up to the minimum value of the operating ranges specified under *Maximum Ratings*, some form of heat-conserving enclosure or auxiliary heater will be required.

**Cooling**--When the operating conditions are such that the maximum value of the operating condensed-mercury temperature range is exceeded, provision should be made for forced-air cooling sufficient to prevent exceeding the maximum value.

### Temperature Rise of Condensed-Mercury to Equilibrium Above Ambient Temperature (Approx.):\*

No load. . . . .	11.5	°C
Full load. . . . .	15	°C

\* with filament volts = 4.75 and no heat-conserving enclosure.

← Indicates a change.

857-B



857-B

# HALF-WAVE MERCURY-VAPOR RECTIFIER

## HALF-WAVE RECTIFIER

Maximum Ratings, Absolute Values: For supply frequency of 60 cps

	Operating Condensed-Mercury Temperature Range		
	25° to 60°C	30° to 40°C	
PEAK INVERSE ANODE VOLTAGE. . . . .	10000 max.	22000 max.	volts
ANODE CURRENT:			
Peak . . . . .	40 max.	40 max.	amp
Average** . . . . .	10 max.	10 max.	amp
Fault, for duration of 0.2 second max. . . . .	400 max.	400 max.	amp

## CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Filament Current . . . . .	1	-	33	amp
Critical Anode Voltage . . .	2	-	100	volts
Peak Tube Voltage Drop . . .	3	-	25	volts

Note 1: With 5 volts rms on filament.

Note 2: With 4.75 volts rms on filament, and condensed-mercury temperature at 25°C, or above.

Note 3: With 5 volts rms on filament, condensed-mercury temperature of  $35^{\circ} \pm 5^{\circ}\text{C}$ , peak anode current of 100 amperes provided by half-cycle pulse from a 60-cps sine wave and recurring approximately once a second. Tube drop is measured by an oscilloscope connected between anode and center tap of filament transformer.

## OPERATING CONSIDERATIONS

**X-Ray Warning.** X-rays are produced when the 857-B is operated with a peak inverse voltage above 16000 volts (absolute value). These rays can constitute a health hazard unless the tube is adequately shielded for X-ray radiation. Although relatively simple shielding should prove adequate, make sure that it provides the required protection to the operator.

Shields and rf filter circuits should be provided for the 857-B if it is subjected to extraneous high-frequency fields during operation. These fields tend to produce breakdown effects in mercury vapor and are detrimental to tube life and performance. When shields are used, special attention must be given to providing adequate ventilation and to maintaining normal condensed-mercury temperature. Rf filters are employed to prevent damage caused by rf currents which might otherwise be fed back into the rectifier tubes.

\*\* Averaged over any period of 30 seconds maximum.

→ Indicates a change.

JULY 1, 1955

TUBE DIVISION

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



857-B

857-B

# HALF-WAVE MERCURY-VAPOR RECTIFIER

For Circuit Figures, see Front of this Section

CIRCUIT	MAX. TRANS. SEC. VOLTS (RMS) E	APPROX. DC OUTPUT VOLTS TO FILTER E <sub>av</sub>	MAX. DC OUTPUT AMPERES		MAX. DC OUTPUT KW TO FILTER	
			I <sub>av</sub>	P <sub>dc</sub>	I <sub>av</sub>	P <sub>dc</sub>
Fig. 1 Half-Wave Single-Phase In-Phase Operation	15400 <sup>□</sup>	7000	10	10	70	32
	7000 <sup>▲</sup>	3200	10			
Fig. 2 Full-Wave Single-Phase In-Phase Operation	7700 <sup>□</sup>	7000	20	20	140	64
	3500 <sup>▲</sup>	3200	20			
Fig. 3 Series Single-Phase In-Phase Operation	15400 <sup>□</sup>	14000	20	20	280	128
	7000 <sup>▲</sup>	6400	20			
Fig. 4 Half-Wave Three-Phase In-Phase Operation	8900 <sup>□</sup>	10500	30	30	315	144
	4000 <sup>▲</sup>	4800	30			
Fig. 5 Parallel Three-Phase Quadrature Operation	8900 <sup>□</sup>	10500	60	60	630	288
	4000 <sup>▲</sup>	4800	60			
Fig. 6 Series Three-Phase Quadrature Operation	8900 <sup>□</sup>	21000	30	30	630	288
	4000 <sup>▲</sup>	9600	30			
Fig. 7 Half-Wave Four-Phase Quadrature Operation	7700 <sup>□</sup>	10100	Resis- tive Load	Induc- tive Load	Resis- tive Load	Induc- tive Load
	3500 <sup>▲</sup>	4600	36	40	364	404
Fig. 8 Half-Wave Six-Phase Quadrature Operation	7700 <sup>□</sup>	10500	Resis- tive Load	Induc- tive Load	Resis- tive Load	Induc- tive Load
	3500 <sup>▲</sup>	4800	38	40	399	420

□ For maximum peak inverse anode voltage of 22000 volts and maximum average current of 10 amperes.


▲ For maximum peak inverse anode voltage of 10000 volts and maximum average current of 10 amperes.

857-B



857-B

# HALF-WAVE MERCURY-VAPOR RECTIFIER

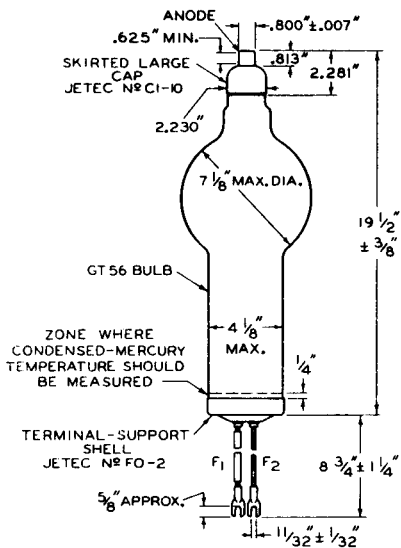

F<sub>1</sub> = FILAMENT (INSULATED)  
 F<sub>2</sub> = FILAMENT, CATHODE SHIELD,  
 AND SHELL (ANODE RETURN)

92CM-4649R3

JULY 1, 1955

TUBE DIVISION  
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-4649R3




857-B

857-B

# HALF-WAVE MERCURY-VAPOR RECTIFIER

## TERMINAL-SUPPORT SHELL

SIZE AND SHAPE  
OF HOLES MAY  
VARY OR THEY  
MAY BE OMITTED

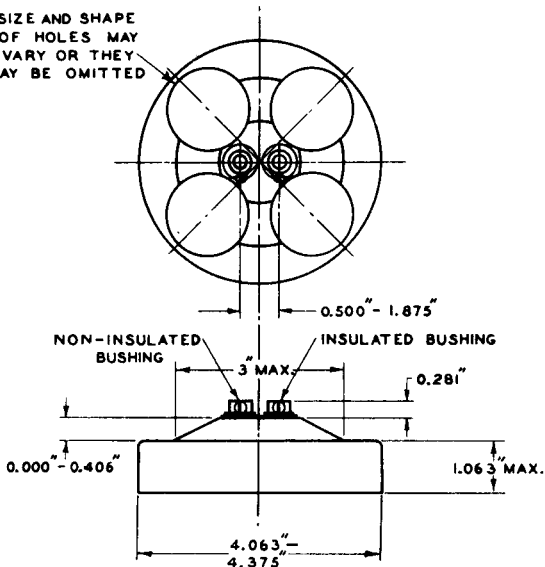

92CS-4653R2

JETEC No. FO-2


RCA No. 3911

857-B



857-B

# RATE OF RISE OF COND.-MERCURY TEMPERATURE

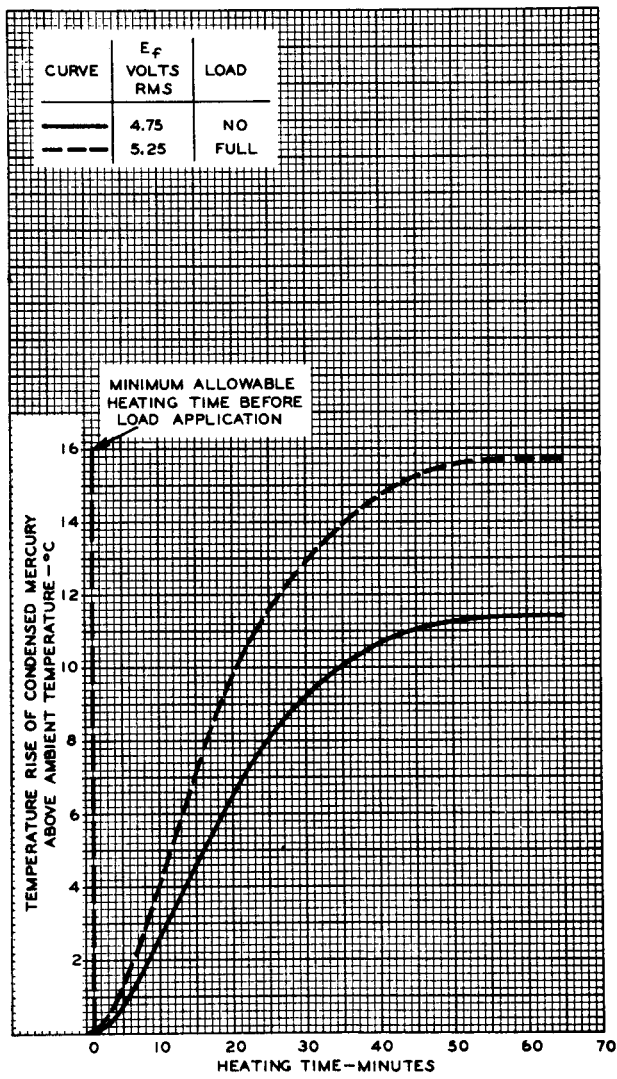

MINIMUM ALLOWABLE HEATING TIME BEFORE LOAD APPLICATION