

FULL RANGE LOUDSPEAKER GD 5-9/7,5

9 5111 049



TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7,2 Ω
Rated frequency range	120 to 15000 Hz
Resonance frequency	180 Hz
Power handling capacity / loudspeaker unmounted , 100 h continuous /	7,5 W
Max. power	8 W
Sensitivity	82 dB
Flux density	0,6 T
Energy in air gap	29,27 mJ
Air - gap	14/2,5/0,8 mm
Voice coil height	4,8 mm
Magnet	
- material	ferrite
- dimensions	2x32/18/6 mm
- mass	2x0,017 kg
Mass of loudspeaker	0,15 kg

AVAILABLE VERSIONS

- GD 5-9/7,5 - 8 Ω catalogue number 9511104906

Connection is by 5,2x0,5mm and 2,8x0,5mm tag connectors or by soldering.

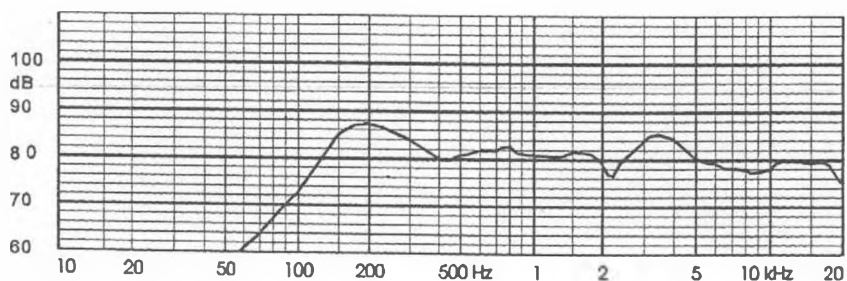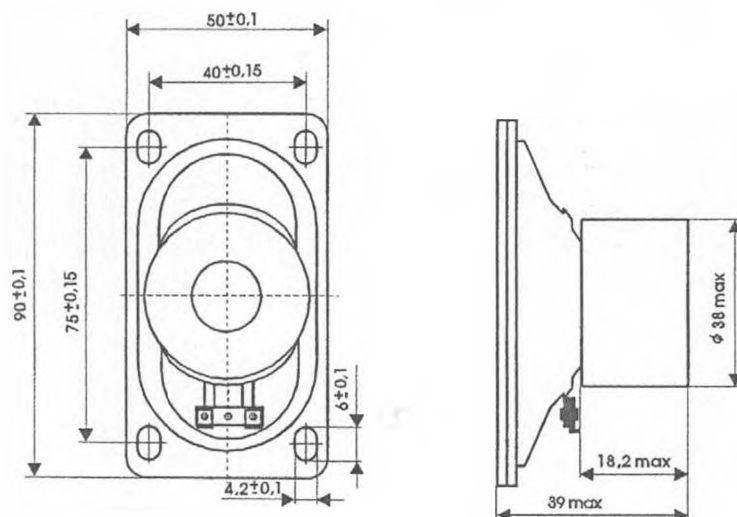

FREQUENCY RESPONSE CURVE
Measured in anechoic room at 1W/1m. Loudspeaker mounted
on IEC baffle.