


CONE MIDRANGE LOUDSPEAKER GDM 12/60

TECHNICAL DATA

Rated impedance	4	8	Ω
Voice coil resistance	3,3	7	Ω
Rated frequency range		1 to 9	kHz
Resonance frequency		0,25	kHz
Recommended crossover frequency		1	kHz
Power handling capacity, P1/P2			
measured with filter		60/18	W
Max. power		90/25	W
Sensitivity		91	dB
Flux density		0,88	T
Energy in air gap		86,3	mJ
Air - gap		20/4,6/0,95	mm
Voice coil height			mm
Magnet			
- material		ferrite	
- dimensions		70/32/10	mm
- mass		0,15	kg
Mass of loudspeaker		0,5	kg

AVAILABLE VERSIONS

- GDM 12/60 - 8Ω, catalogue number 9 5153 006 01
- GDM 12/60 - 4Ω, catalogue number 9 5153 006 05

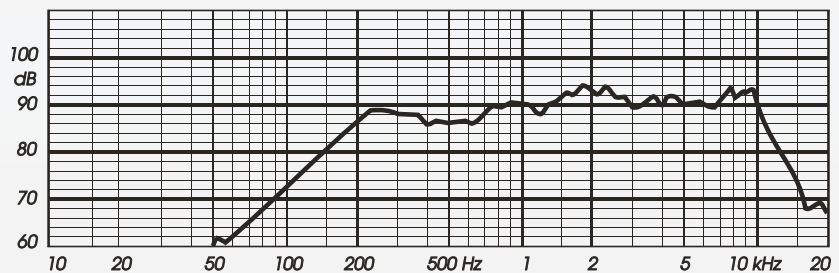

FREQUENCY RESPONSE CURVE

Measured in anechoic room at 1W/1m. Loudspeaker mounted in sealed 5 dm³ enclosure.

