


MARCONI 6-VOLT VALVES

P 625A, Super Power, 13.6

P625A is a super-power valve of similar design to P625 but for anode voltages not exceeding 200. The power output is sufficient for moving coil volume in a large room.

Anode Volts.	Grid Bias.	Average Anode Current.
120	-19½	16 m.a.
160	-28½	20 m.a.
200	-39	25 m.a.

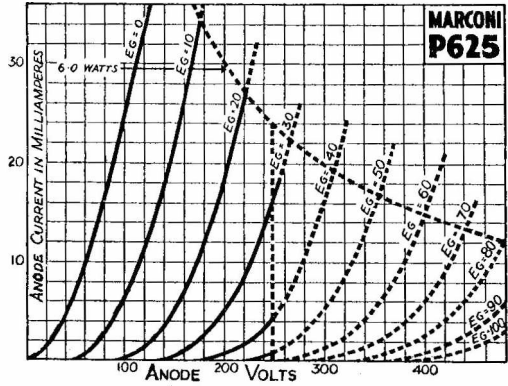

Anode Volts, Anode Current
Curve for P 625.

Approx. Operating Data.

P625A, above.
P625, right.

Anode Volts.	Grid Bias.	Average Anode Current.
250	-26	24 m.a.
200	-20	19 m.a.
150	-14	14 m.a.
100	-7	10 m.a.

Anode Volts, Anode Current Curve for P625A

