


MARCONI A.C. MAINS VALVES

PX 4, Super-Power, 20/-

Marconi PX.4 is a super-power output valve for powerful receivers, capable of driving moving coil and large speakers at full volume for dancing, etc., at home and in small halls. When used with moving iron speakers a choke or transformer output is desirable. In many cases 200 volts will be found to provide sufficient volume, as in commercial receivers using this common H.T. potential throughout the set.

Approx. Operating Data.

Anode Volts.	Negative Grid Bias Volts.	Average Anode Current in milliamperes.
250	33	48
200	26	40
150	16	36

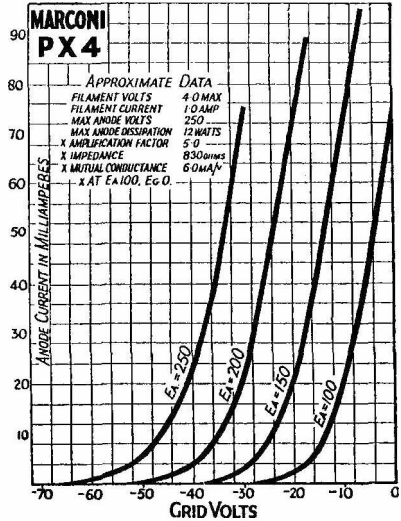

Anode Volts—Anode Current curve for PX 4.

