

K50WP-50

Visaton 5 cm (2") HiFi fullrange driver (2916)



General description

5 cm (2") full-range speaker with a plastic basket and plastic diaphragm. Broad frequency response and good voice reproduction. Particularly well suited to outdoor applications and where ambient conditions are generally unfavourable (e.g. high humidity)

Typical applications:

- Monitoring speaker for electronic devices
- Monitoring speaker for outdoor systems

Attributes:


- Plastic: ABS (basket; UL 94: HB); Mylar (diaphragm)
- Functionally at cold according to EN 60068-2-1/EN 50155
- Weather-resistant
- UV-resistant

Technical Data:

Rated power 2 W
Maximum power 3 W
Nominal impedance 2 50 Ohm
Frequency response 180–17000 Hz
Mean sound pressure level 86 dB (1 W/1 m)
Resonance frequency f_s 300 Hz
Voice coil diameter 10 mm
Cutout diameter 46 mm
Net weight 0,048 g
Protective system IP 65
Heat resistance –40 ... 70 °C



K50WP

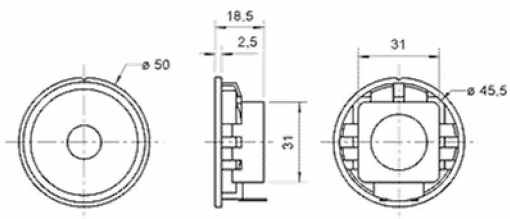

drawing

