

## SPECIFICATION

Nominal Basket Diameter	10", 254mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	400W
Music Program	800W
Resonance	61.38Hz
Usable Frequency Range***	400Hz-4.0kHz
Sensitivity	99.90
Magnet Weight	11.40 oz.
Gap Height	0.36", 9.27mm
Voice Coil Diameter	3.00", 76.20mm

## THIELE & SMALL PARAMETERS

Resonant Frequency (fs)	61.38Hz
DC Resistance (Re)	5.46
Coil Inductance (Le)	0.57mH
Mechanical Q (Qms)	9.93
Electromagnetic Q (Qes)	0.27
Total Q (Qts)	0.26
Compliance Equivalent Volume (Vas)	37.21 liters / 1.31 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	162.18cc
Mechanical Compliance of Suspension (Cms)	0.20mm/N
BL Product (BL)	16.27 T-M
Diaphragm Mass inc. Airload (Mms)	33.98 grams
Efficiency Bandwidth Product (EBP)	226.92
Maximum Linear Excursion (Xmax)	4.43mm
Surface Area of Cone (Sd)	366.10 cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	7.50mm

## MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	9.91-21.24 liters/0.35-0.75cu.ft.
Vented	15.01-28.32 liters/0.53-1.00 cu.ft.
Driver Volume Displaced	63.55 cu.in.-1.04 liters
Overall Diameter	11.18", 283.97mm
Baffle Hole Diameter	9.12", 231.65mm
Front Sealing Gasket	Fitted as standard
Rear Sealing Gasket	Fitted as standard
Mounting Holes Diameter	0.29", 7.37mm
Mounting Holes B.C.D.	10.49", 266.50mm
Depth	4.61", 117.09mm
Net Weight	7.10 lbs., 3.22 kg
Shipping Weight	7.80 lbs., 7.10 kg

## MATERIALS OF CONSTRUCTION


Edge Wound Aluminum voice coil  
 Fiberglass  
 Neodymium magnet  
 Vented Core  
 Die-cast aluminum basket  
 Treated Paper Cone  
 Sealed Cloth Edge  
 Treated Paper dust cap



  
 The Art and Science of Sound

## KAPPALITE™ 3010H0 NEODYMIUM SERIES

Lightweight high power high output midrange driver. For use in small sealed and vented enclosures.

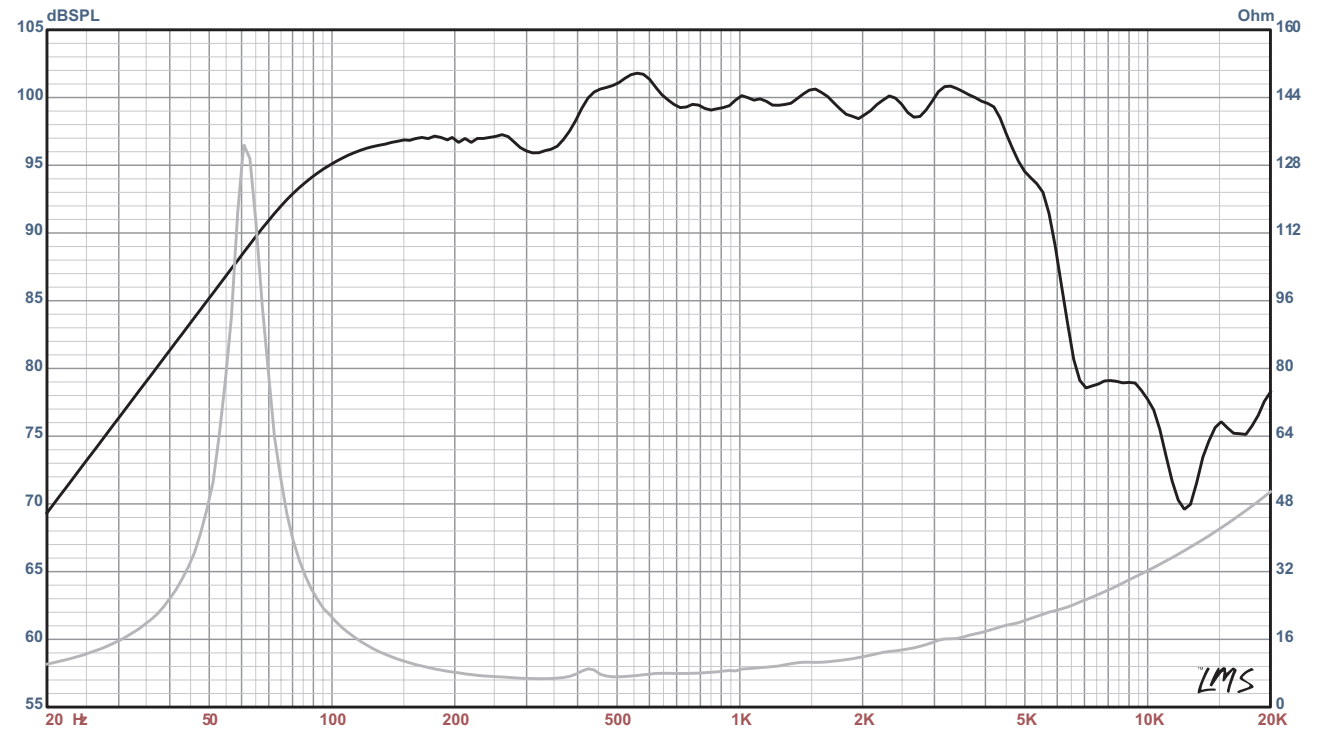

\* Please inquire about alternative impedances.

\*\* Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

\*\*\* The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)