



## NPN HIGH VOLTAGE POWER TRANSISTORS

- SWITCHING REGULATORS
- INVERTERS
- SOLENOID AND RELAY DRIVERS
- MOTOR CONTROLS
- DEFLECTION CIRCUITS

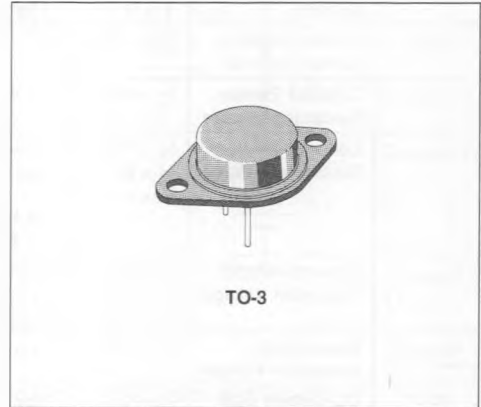

### INTERNAL SCHEMATIC DIAGRAM



### DESCRIPTION

High voltage, high speed switching power transistors suited for use on the 220 and 380V mains.

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	2N6674	2N6675	Unit
$V_{CEV}$	Collector-emitter Voltage ( $V_{BE} = -1.5V$ )	450	650	V
$V_{CEX}$	Collector-emitter Voltage	350	400	V
$V_{CEO}$	Collector-emitter Voltage ( $I_B = 0$ )	300	450	V
$V_{EBO}$	Emitter-base Voltage ( $I_C = 0$ )	7		V
$I_C$	Collector Current	15		A
$I_{CM}$	Collector Peak Current	20		A
$I_B$	Base Current	5		A
$P_{Tot}$	Total Dissipation at $T_c < 25^\circ C$	175		W
$T_{stg}$	Storage Temperature	- 65 to 200		$^\circ C$
$T_j$	Max. Operating Junction Temperature	200		$^\circ C$

## THERMAL DATA

$R_{thj-case}$	Thermal Resistance Junction-case	Max	1	°C/W
----------------	----------------------------------	-----	---	------

ELECTRICAL CHARACTERISTICS ( $T_{case} = 25^{\circ}C$  unless otherwise specified)

Symbol	Parameter	Test Conditions			Min.	Typ.	Max.	Unit
$I_{CEV}$	Collector Cutoff Current	$V_{CE} = V_{CEV}$ $V_{CE} = V_{CEV}$	$V_{BE} = -1.5V$ $V_{BE} = -1.5V$	$T_c = 100^{\circ}C$			0.1 1	mA mA
$I_{EBO}$	Emitter Cutoff Current ( $I_C = 0$ )	$V_{EB} = 7V$					2	mA
$V_{CEO(sus)}^*$	Collector Emitter Sustaining Voltage	$I_C = 0.2A$	$L_C = 25mH$	for <b>2N6674</b> for <b>2N6675</b>	300 400			V V
$V_{CEX(sus)}^*$	Collector-emitter Sustaining Voltage	$I_C = 10A$ $I_B = 2A$ $V_{BB} = -4V$	$L_C = 50\mu H$ $R_{BB} = 2\Omega$	for <b>2N6674</b> for <b>2N6675</b>	350 450			V V
$V_{CE(sat)}^*$	Collector-emitter Saturation Voltage	$I_C = 10A$ $I_C = 10A$ $I_C = 15A$	$I_B = 2A$ $I_B = 2A$ $I_B = 5A$	$T_c = 100^{\circ}C$			1 2 5	V V V
$V_{BE(sat)}^*$	Base-emitter Saturation Voltage	$I_C = 10A$	$I_B = 2A$				1.5	V
$h_{FE}^*$	DC Current Gain	$I_C = 10A$	$V_{CE} = 2V$		8			
$h_{Ia}$	Small Signal Current Gain	$I_C = 1A$	$V_{CE} = 10V$	$f = 5MHz$	3		10	

## RESISTIVE LOAD

Symbol	Parameter	Test Conditions			Min.	Typ.	Max.	Unit
$t_d$	Delay Time	$V_{CC} = 135V$	$I_C = 10A$	$t_p = 20\mu s$			0.1	$\mu s$
$t_r$	Rise Time	$V_{BB} = -6V$	$I_{t\#} p = 20\mu s$				0.6	$\mu s$
$t_r$	Rise Time	$V_{CC} = 135V$ $V_{BB} = -6V$	$I_C = 10A$ $I_{B1} = 2A$	$t_p = 20\mu s$ $T_c = 100^{\circ}C$			1	$\mu s$
$t_s$	Storage Time	$V_{CC} = 135V$	$I_C = 10A$	$t_p = 20\mu s$			2.5	$\mu s$
$t_f$	Fall Time	$V_{BB} = -6V$	$I_{B1} = -I_{B2} = 2A$				0.5	$\mu s$
$t_s$	Storage Time	$V_{CC} = 135V$	$I_C = 10A$	$t_p = 20\mu s$			4	$\mu s$
$t_f$	Fall Time	$V_{BB} = -6V$ $T_c = 100^{\circ}C$	$I_{B1} = -I_{B2} = 2A$				1	$\mu s$

## INDUCTIVE LOAD

Symbol	Parameter	Test Conditions			Min.	Typ.	Max.	Unit
$t_c$	Crossover Time	$V_{CC} = 135V$ $R_C = 13.5\Omega$ $V_{clamp} = V_{CEX}$	$I_C = 10A$ $I_{B1} = -I_{B2} = 2A$	$I_C = 50\mu H$ $T_c = 25^{\circ}C$ $T_c = 100^{\circ}C$			0.5 0.8	$\mu s$ $\mu s$

\* Pulsed : Pulse duration = 300  $\mu s$ , duty cycle = 2 %.

Figure 1 : Test Circuit RBSOA.

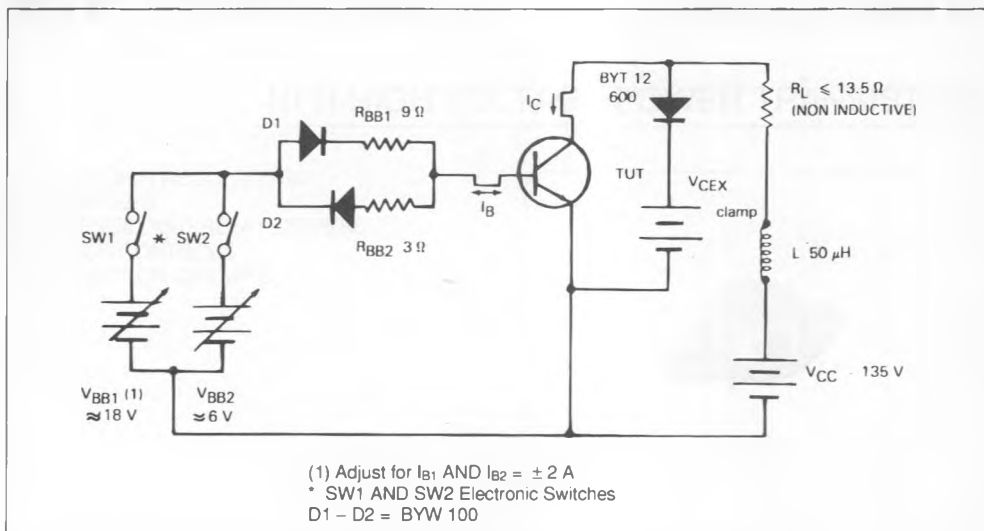


Figure 2 : Maximum Operating Conditions for Switching between Saturation and Cut-off.

