

**Silicon PNP Power Transistor**

**2SA768**

**DESCRIPTION**



- Collector-Emitter Breakdown Voltage-  
 $V_{(BR)CEO} = -60(V)(Min.)$
- Complement to Type 2SC1826

**APPLICATIONS**


- Designed for audio and general purpose applications.

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^{\circ}C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-60	V
$V_{CEO}$	Collector-Emitter Voltage	-60	V
$V_{EBO}$	Emitter-Base Voltage	-6	V
$I_c$	Collector Current-Continuous	-4	A
$I_b$	Base Collector Current-Continuous	-1	A
$P_c$	Total Power Dissipation @ $T_c=25^{\circ}C$	30	W
$T_j$	Junction Temperature	150	$^{\circ}C$
$T_{stg}$	Storage Temperature Range	-55~150	$^{\circ}C$

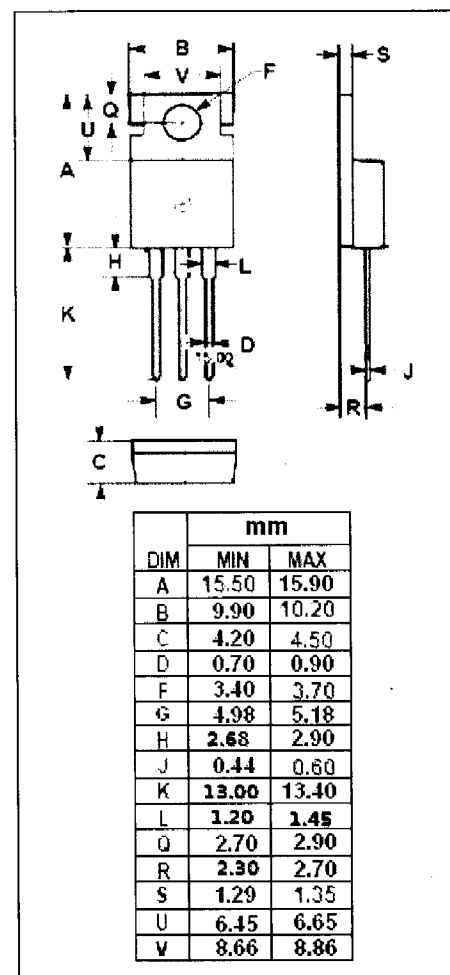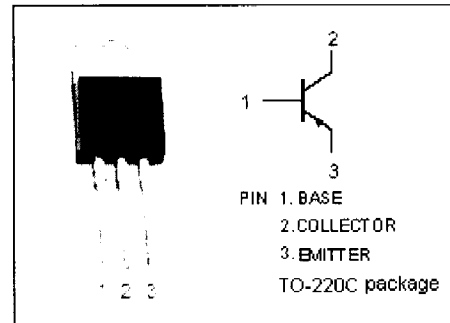

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



# Silicon PNP Power Transistor

# 2SA768

## ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C = -25\text{mA}; I_B = 0$	-60			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -2\text{A}; I_B = -0.2\text{A}$			-1.0	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB} = -60\text{V}; I_E = 0$			-1.0	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -6\text{V}; I_C = 0$			-1.0	mA
$h_{FE}$	DC Current Gain	$I_C = -1\text{A}; V_{CE} = -4\text{V}$	40			
$f_T$	Current-Gain—Bandwidth Product	$I_E = 0.2\text{A}; V_{CE} = -10\text{V}$		10		MHz

## Switching Times

$t_r$	Rise Time	$I_C = -2\text{A}, R_L = 3\Omega,$ $I_{B1} = -I_{B2} = -0.3\text{A}, V_{CC} = -6\text{V}$		1.0		$\mu\text{s}$
$t_{stg}$	Storage Time			0.4		$\mu\text{s}$
$t_f$	Fall Time			0.15		$\mu\text{s}$