

Transistor

Silicon PNP Epitaxial Type (PCT Process)

Power Amplifier Applications

Features

- Complementary to 2SD2155
- Recommend for 100W High Fidelity Audio Frequency
- Amplifier Output Stage

Absolute Maximum Ratings (Ta = 25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	-180	V
Collector-Emitter Voltage	V_{CE0}	-180	V
Emitter-Base Voltage	V_{EB0}	-5	V
Collector Current	I_C	-15	A
Base Current	I_B	-1.5	A
Collector Power Dissipation (Tc = 25°C)	P_C	150	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

Electrical Characteristics (Ta = 25°C)







CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CB0}	$V_{CB} = -180V, I_E = 0$	-	-	-5.0	μA
Emitter Cut-off Current	I_{EB0}	$V_{EB} = -5V, I_C = 0$	-	-	-5.0	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CE0}$	$I_C = -50mA, I_B = 0$	-180	-	-	V
DC Current Gain	$h_{FE(1)(N0\alpha\epsilon)}$	$V_{CE} = -5V, I_C = -1A$	55	-	160	
	$h_{FE(2)}$	$V_{CE} = -5V, I_C = -6A$	30	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -8A, I_B = -0.8A$	-	-	-3.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = -5V, I_C = -6A$	-	-	-1.5	V
Transition Frequency	f_T	$V_{CE} = -5V, I_C = -1A$	-	10	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	340	-	pF

Note: h_{FE} (1) Classification R : 0 : 55 ~ 110, 0 : 80 ~ 160

Unit in mm

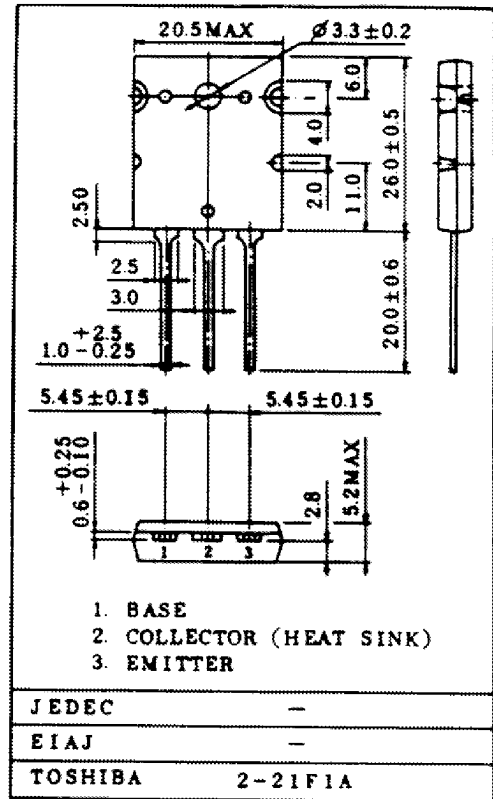

Weight : 9.7g

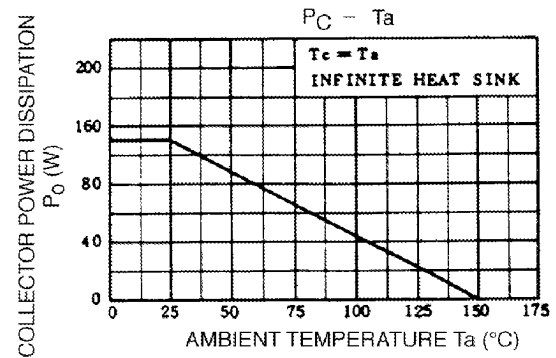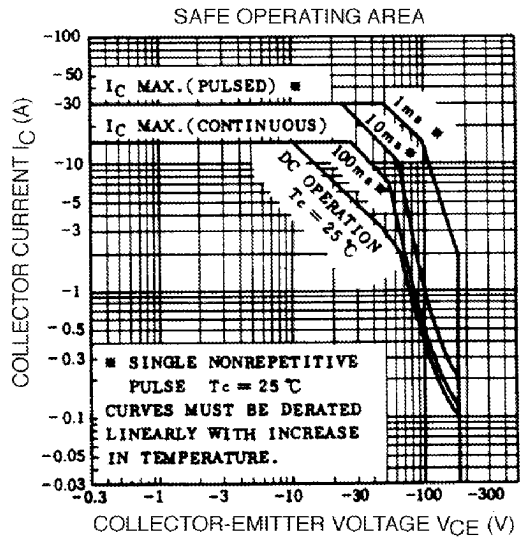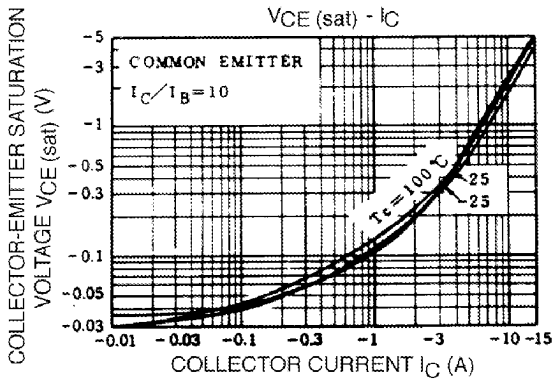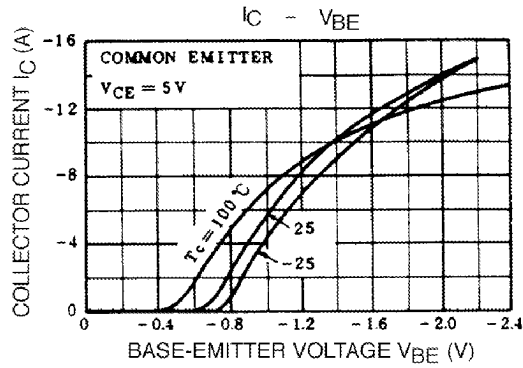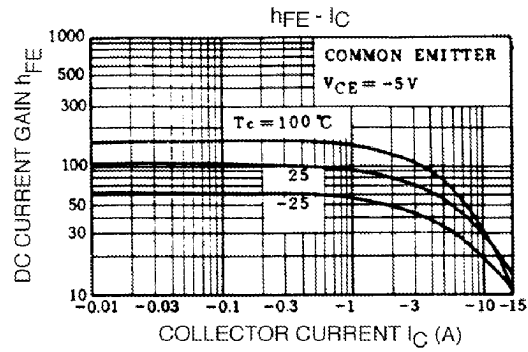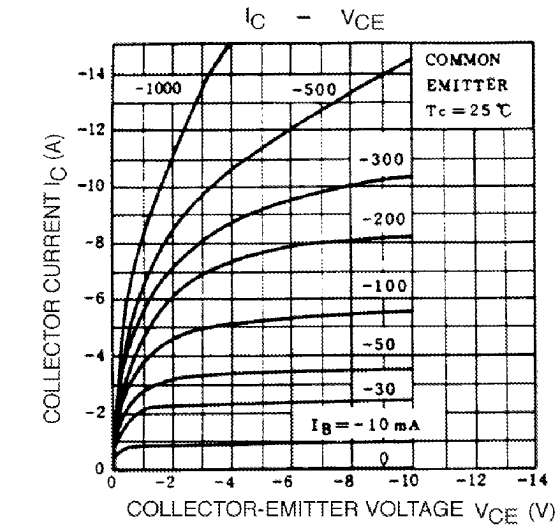

The information contained here is subject to change without notice.

The information contained herein is presented only as guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others. These TOSHIBA products are intended for usage in general electronic equipments (office equipment, communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these TOSHIBA products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, spaceship, traffic signal, combustion control, all types of safety devices, etc.). TOSHIBA cannot accept liability to any damage which may occur in case these TOSHIBA products were used in the mentioned equipments without prior consultation with TOSHIBA.