

Silicon PNP Darlington Power Transistor

2SB1568

DESCRIPTION




- Collector-Emitter Breakdown Voltage-
 : $V_{(BR)CEO} = -80V(\text{Min})$
- High DC Current Gain-
 : $h_{FE} = 1000(\text{Min})@ (V_{CE} = -3V, I_C = -2A)$
- Complement to Type 2SD2399

APPLICATIONS

- Designed for power amplifier applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-7	V
I_C	Collector Current-Continuous	-4	A
I_{CM}	Collector Current-Peak	-6	A
P_C	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	2	W
	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	30	
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

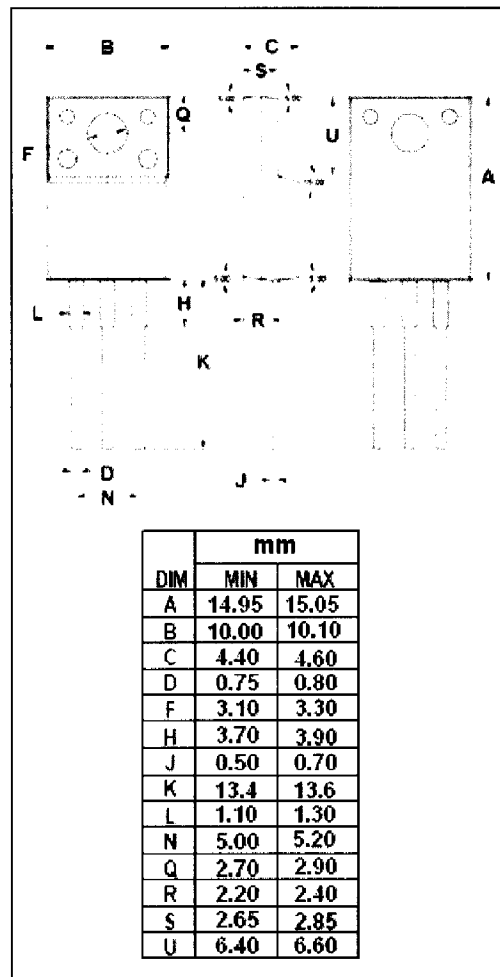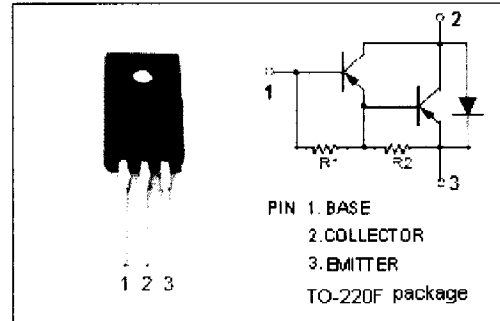

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon PNP Darlington Power Transistor

2SB1568

ELECTRICAL CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = -1mA; I _B = 0	-80			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = -50 μ A; I _E = 0	-80			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = -5mA; I _C = 0	-7			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -2A; I _B = -4mA			-1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} = -80V; I _E = 0			-100	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = -5V; I _C = 0			-3.0	mA
h _{FE}	DC Current Gain	I _C = -2A; V _{CE} = -3V	1000		10000	
f _T	Current-Gain—Bandwidth Product	I _C = -0.5A; V _{CE} = -5V; f= 10MHz		12		MHz
C _{OB}	Collector Output Capacitance	I _E = 0; V _{CB} = -10V; f= 1MHz		35		pF