DATA SHEET

NEC

MOS FIELD EFFECT TRANSISTOR

2SK2477

SWITCHING
N-CHANNEL POWER MOS FET
INDUSTRIAL USE

DESCRIPTION

The 2SK2477 is N-Channel MOS Field Effect Transistor designed for high voltage switching applications.

FEATURES

- Low On-Resistance
  $R_{DS(on)}$ = 1.0 Ω (V_{GS} = 10 V, I_D = 5.0 A)
- Low C_{iss} C_{iss} = 2 950 pF TYP.
- High Avalanche Capability Ratings

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C)

Drain to Source Voltage	V_{DSS}	800	V
Gate to Source Voltage	V_{GSS}	±30	V
Drain Current (DC)	$I_{D(DC)}$	±10	A
Drain Current (pulse)*	$I_{D(pulse)}$	±30	A
Total Power Dissipation (T_c = 25 °C)	P_{T1}	150	W
Total Power Dissipation (T_A = 25 °C)	P_{T2}	3.0	W
Channel Temperature	T_{ch}	150	°C
Storage Temperature	T_{stg}	–55 to +150	°C
Single Avalanche Current**	I_{AS}	10	A
Single Avalanche Energy**	E_{AS}	300	mJ

* PW ≤ 10 μs, Duty Cycle ≤ 1 %

** Starting T_{ch} = 25 °C, R_G = 25 Ω, V_{GS} = 20 V → 0

PACKAGE DIMENSIONS
(in millimeter)

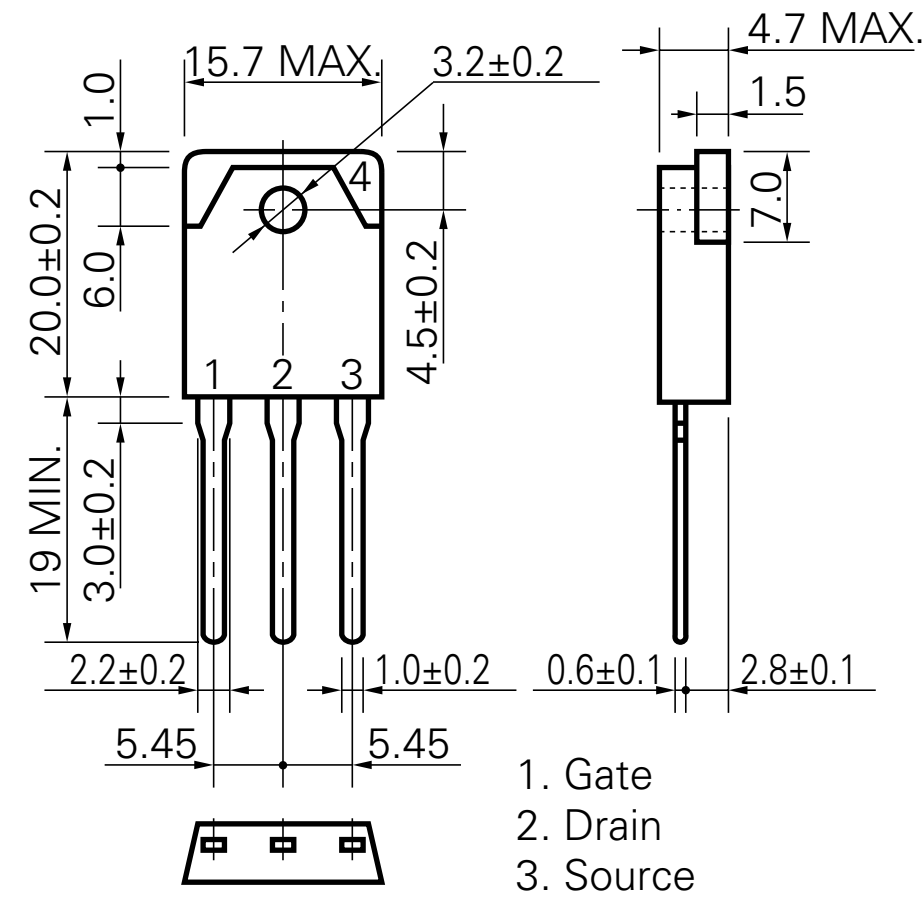

1. Gate
2. Drain
3. Source
4. Fin (Drain)

MP-88



Document No. D10269EJ1V0DS00 (1st edition)
Date Published August 1995 P
Printed in Japan

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Drain to Source On-Resistance	$R_{DS\ (on)}$		0.65	1.0	Ω	V_{GS} = 10 V, I_D = 5.0 A
Gate to Source Cutoff Voltage	$V_{GS\ (off)}$	2.5		3.5	V	V_{DS} = 10 V, I_D = 1 mA
Forward Transfer Admittance	$\mid y_{fs} \mid$	3.5			S	V_{DS} = 20 V, I_D = 5.0 A
Drain Leakage Current	I_{DSS}			100	μA	V_{DS} = V_{DSS}, V_{GS} = 0
Gate to Source Leakage Current	I_{GSS}			±100	nA	V_{GS} = ±30 V, V_{DS} = 0
Input Capacitance	C_{iss}		2 950		pF	V_{DS} = 10 V
Output Capacitance	C_{oss}		440		pF	V_{GS} = 0
Reverse Transfer Capacitance	C_{rss}		80		pF	f = 1 MHz
Turn-On Delay Time	$t_{d\ (on)}$		35		ns	I_D = 5.0 A
Rise Time	t_r		30		ns	V_{GS} = 10 V
Turn-Off Delay Time	$t_{d\ (off)}$		160		ns	V_{DD} = 150 V
Fall Time	t_f		32		ns	R_G = 10 Ω
Total Gate Charge	Q_G		90		nC	I_D = 10 A
Gate to Source Charge	Q_{GS}		16		nC	V_{DD} = 450 V
Gate to Drain Charge	Q_{GD}		40		nC	V_{GS} = 10 V
Body Diode Forward Voltage	$V_{F\ (S-D)}$		1.0		V	I_F = 10 A, V_{GS} = 0
Reverse Recovery Time	t_{rr}		890		ns	I_F = 10 A, V_{GS} = 0
Reverse Recovery Charge	Q_{rr}		6.7		μC	di/dt = 50 A/μs

Test Circuit 1 Avalanche Capability

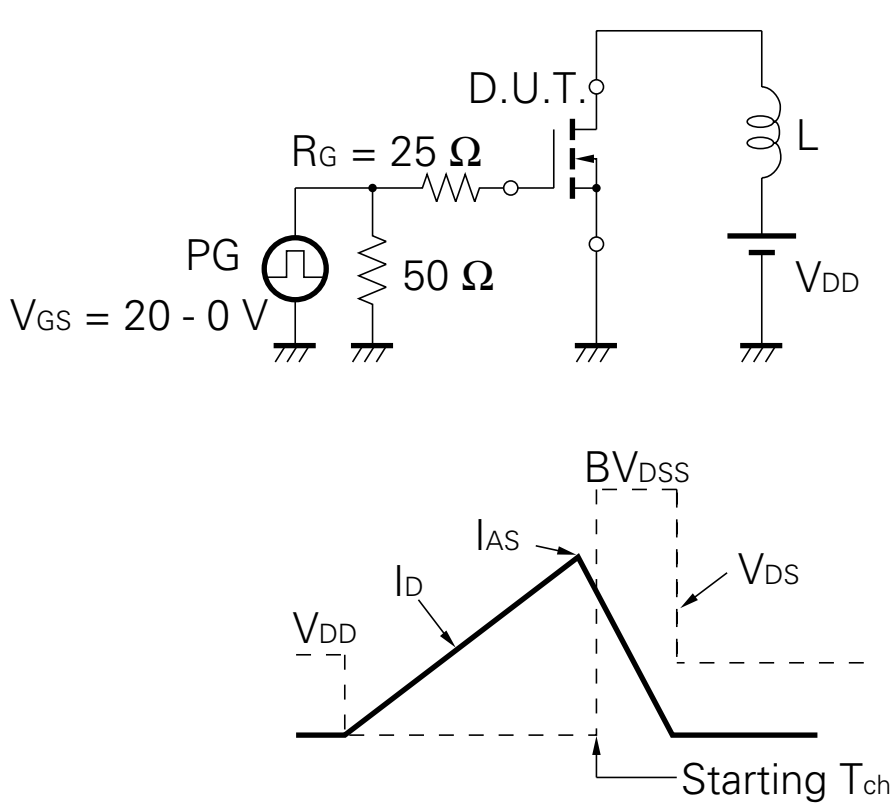

Test Circuit 2 Switching Time

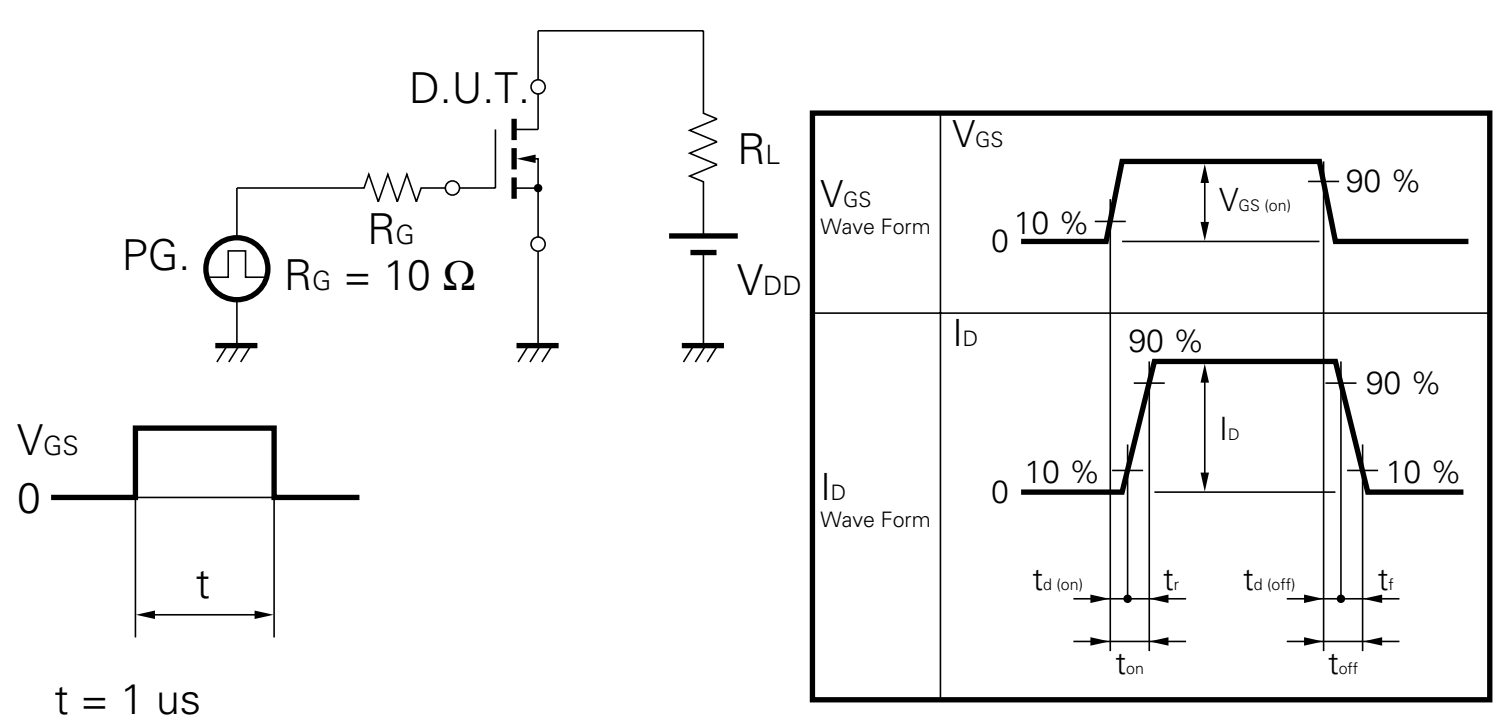

t = 1 us
Duty Cycle ≤ 1 %

Test Circuit 3 Gate Charge

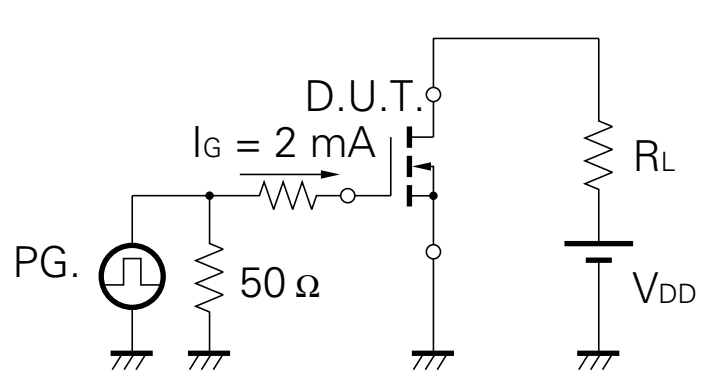

The application circuits and their parameters are for references only and are not intended for use in actual design-in's.

TYPICAL CHARACTERISTICS (T_A = 25 °C)

DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

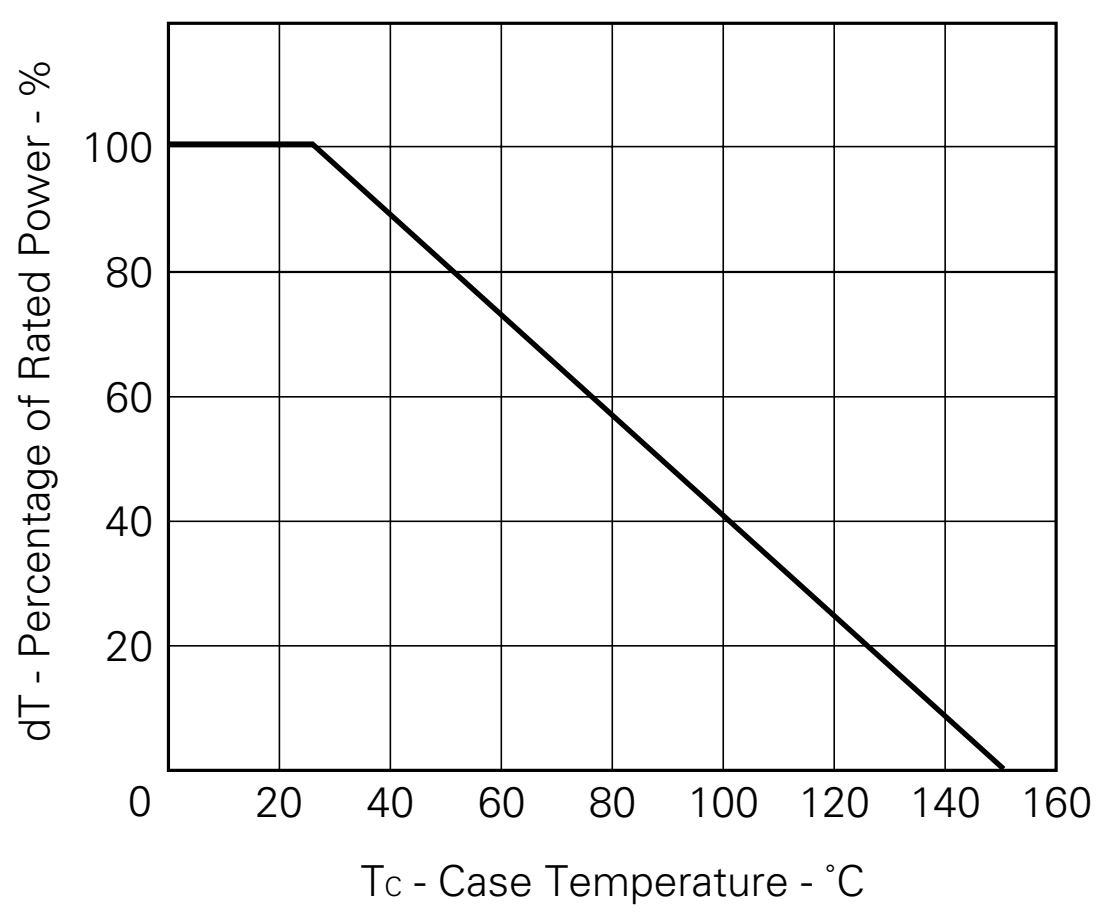

TOTAL POWER DISSIPATION vs. CASE TEMPERATURE

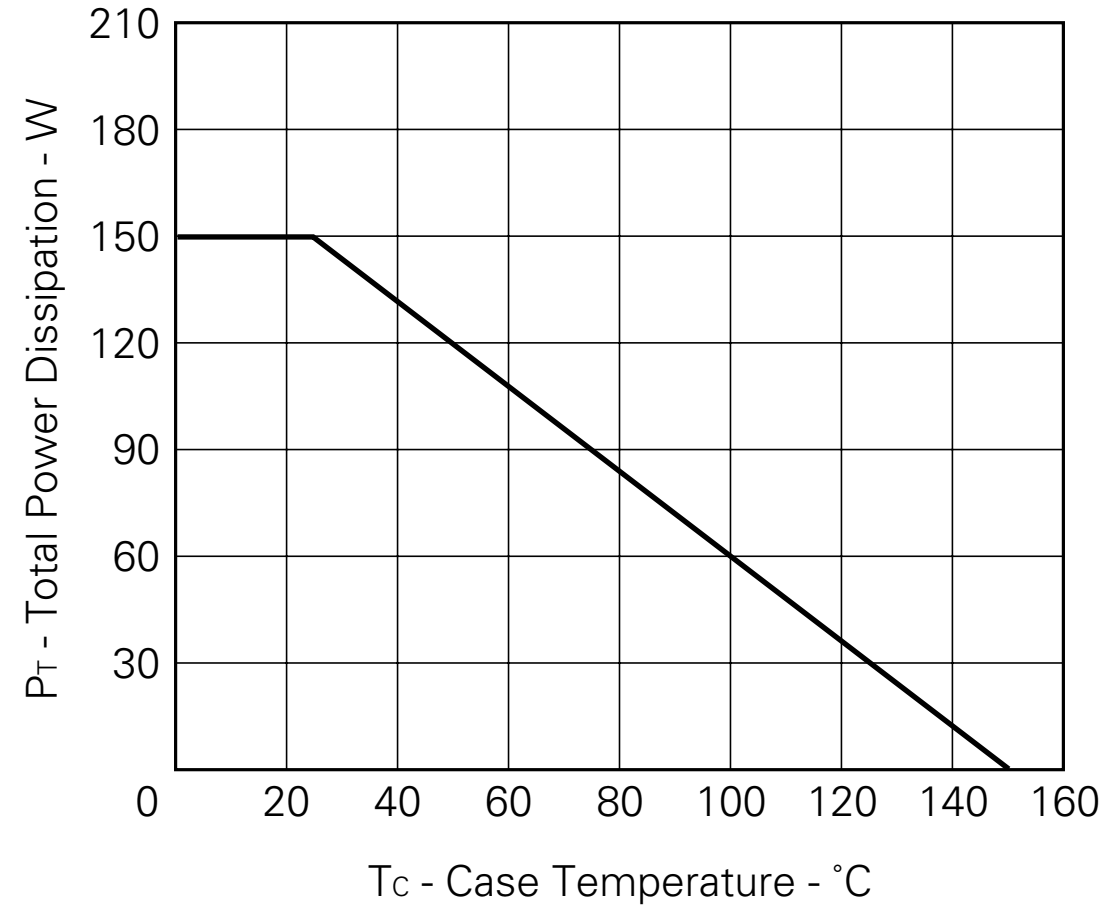

FORWARD BIAS SAFE OPERATING AREA

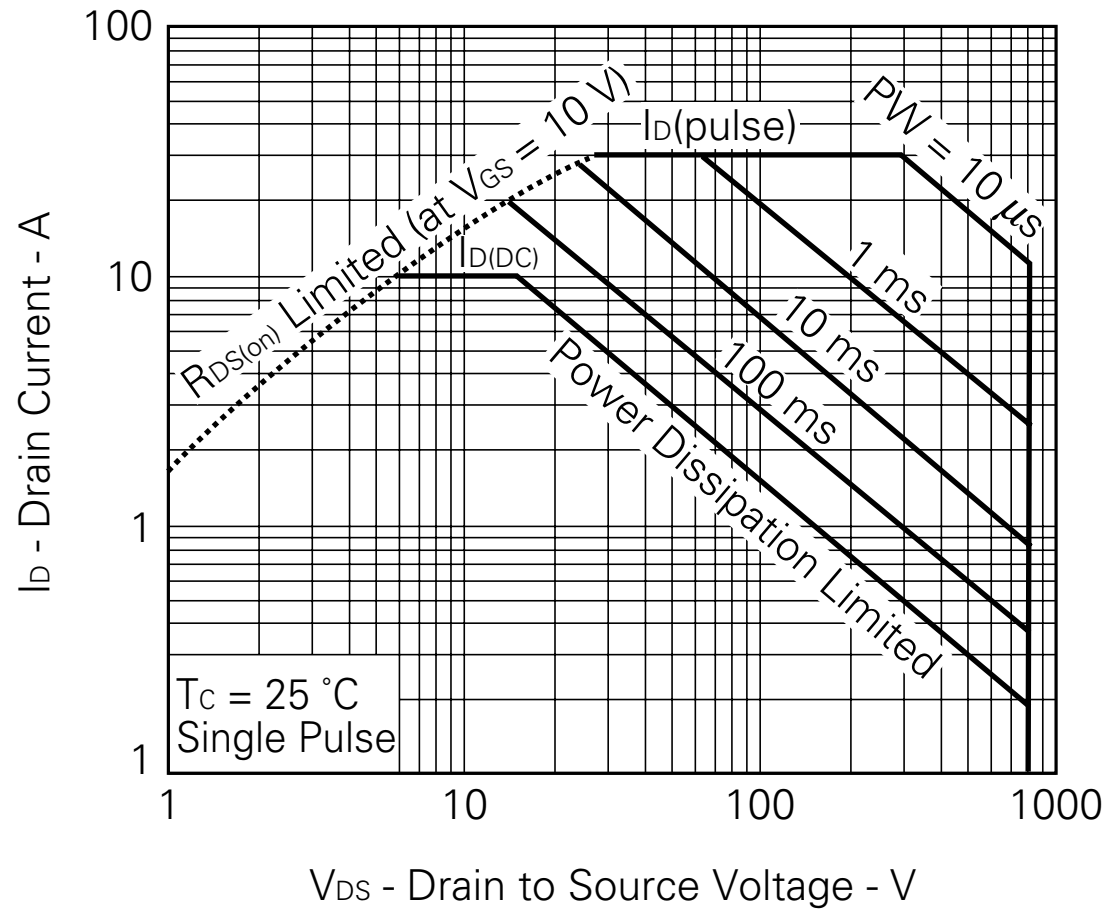

DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

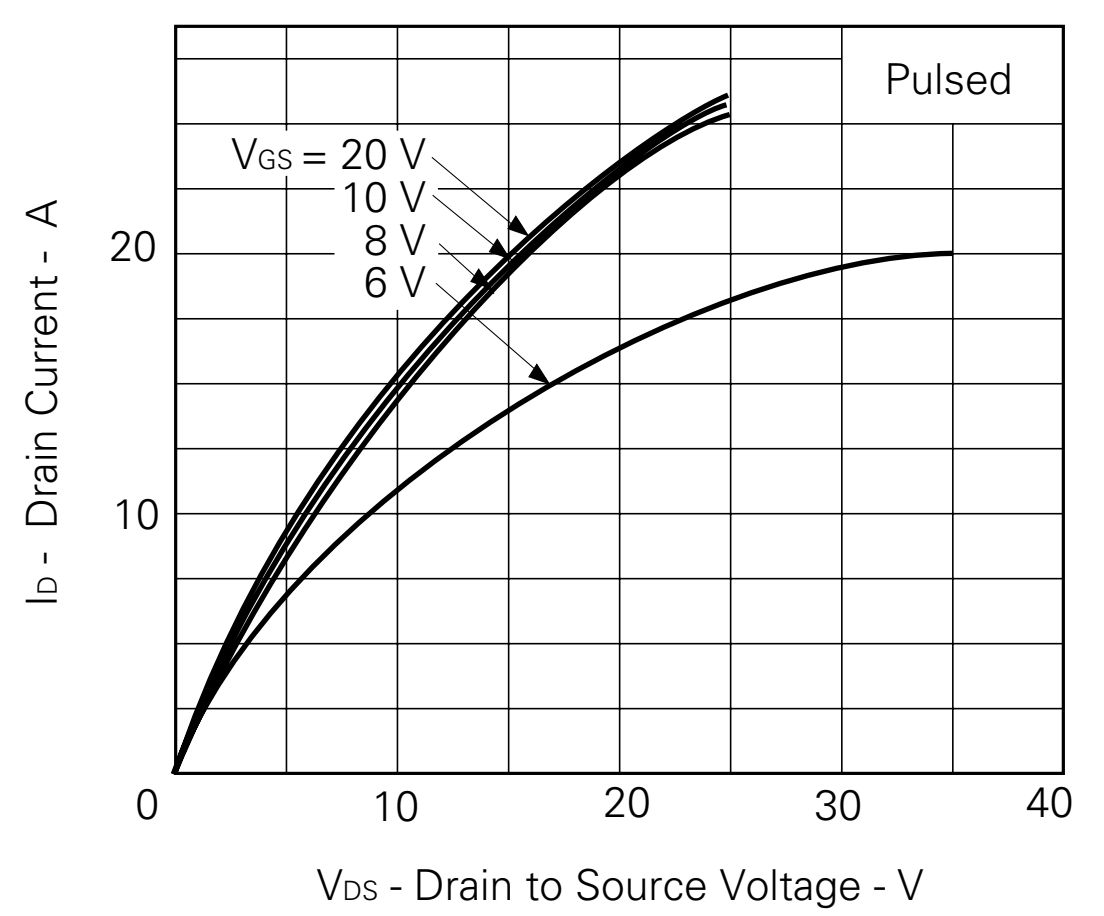

FORWARD TRANSFER CHARACTERISTICS

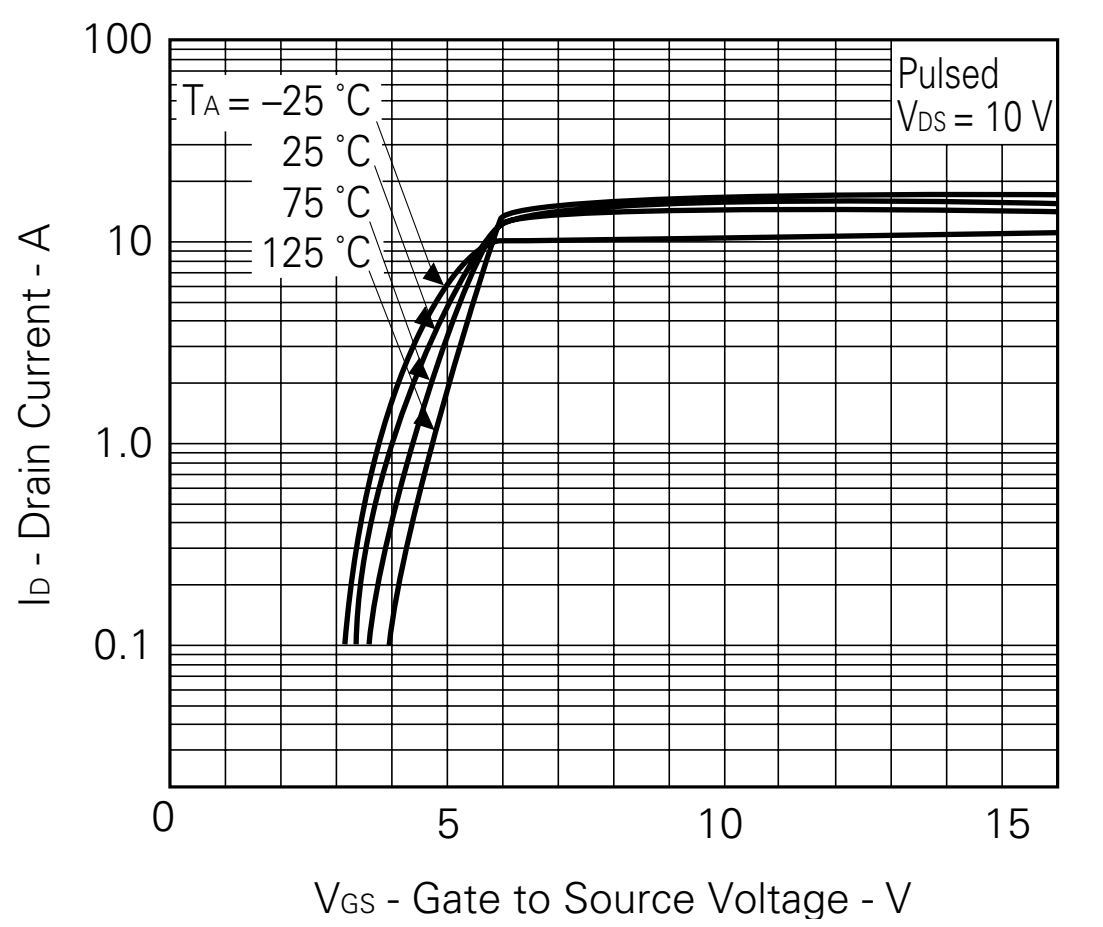

TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH

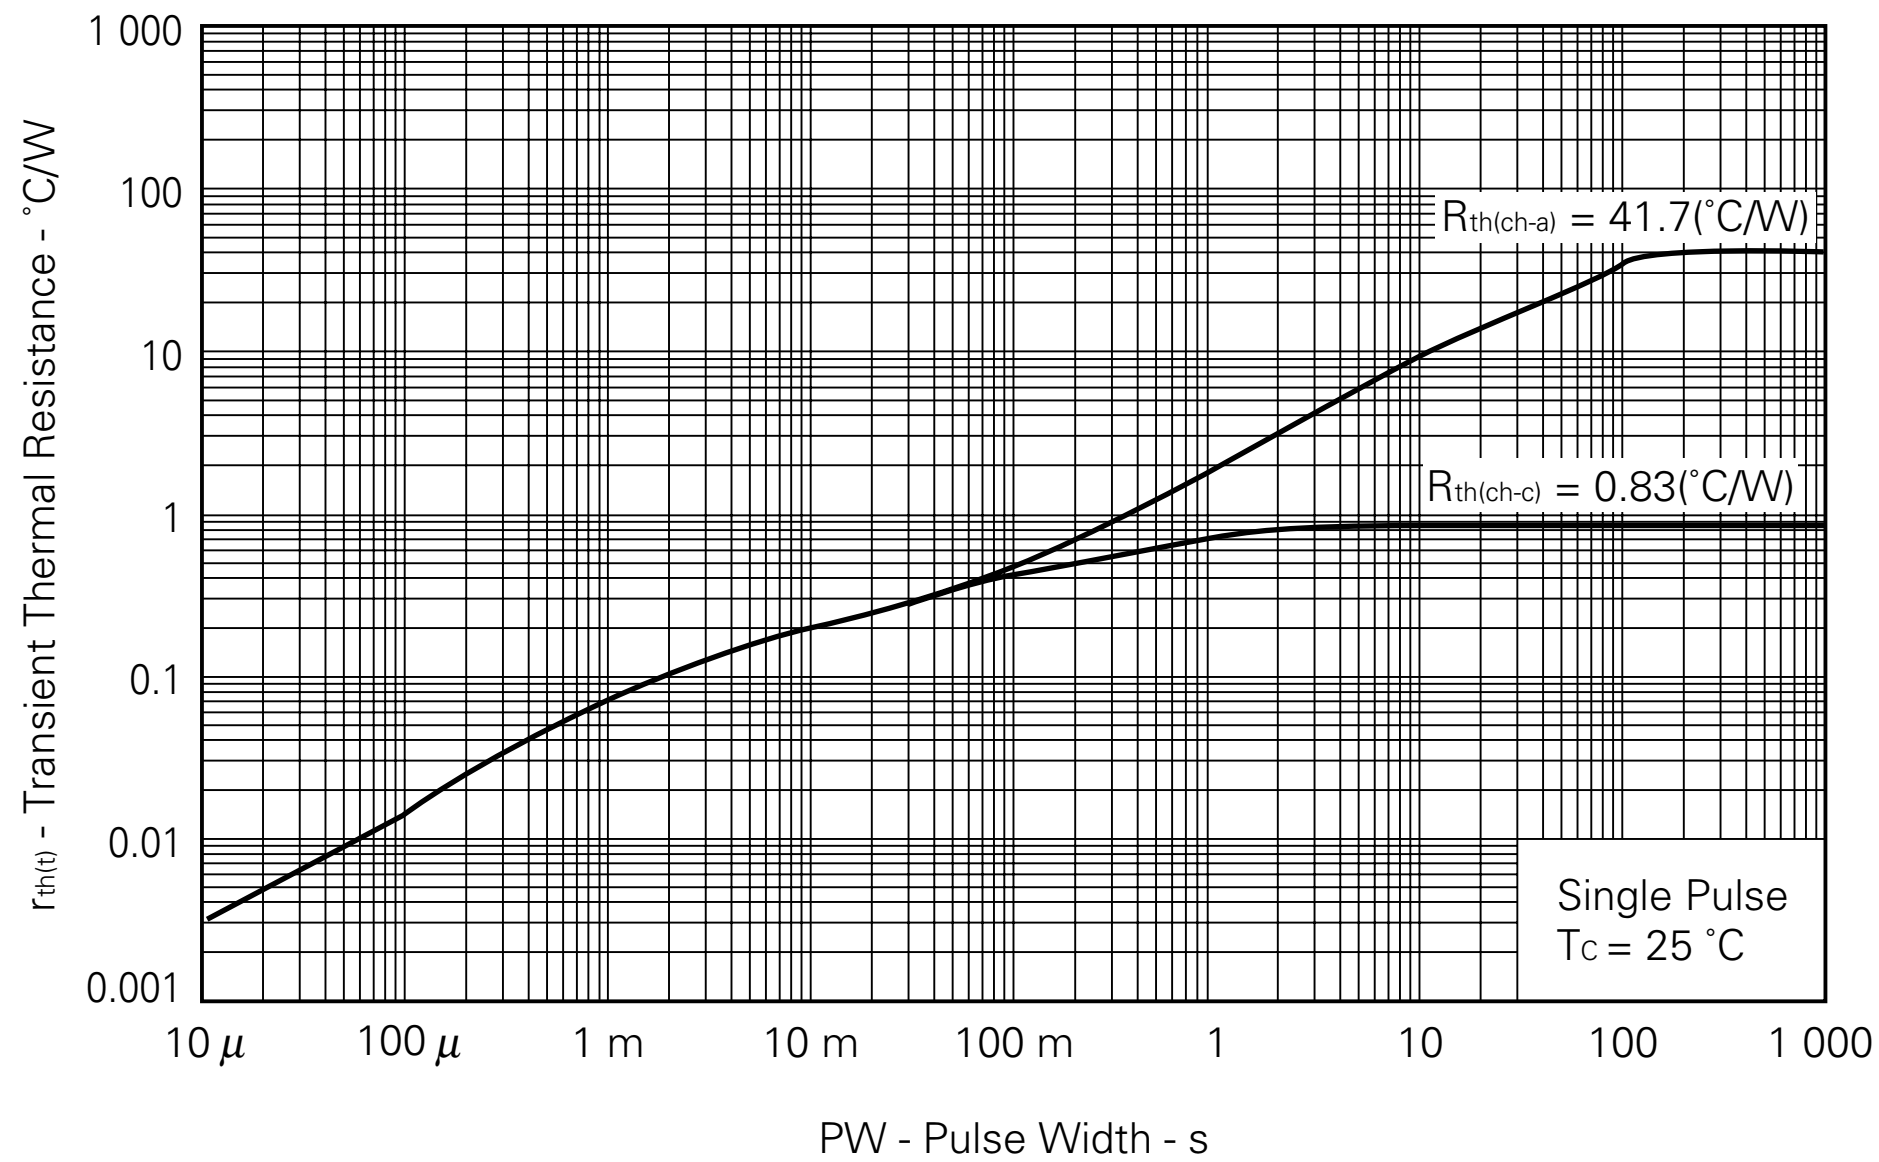

FORWARD TRANSFER ADMITTANCE vs. DRAIN CURRENT

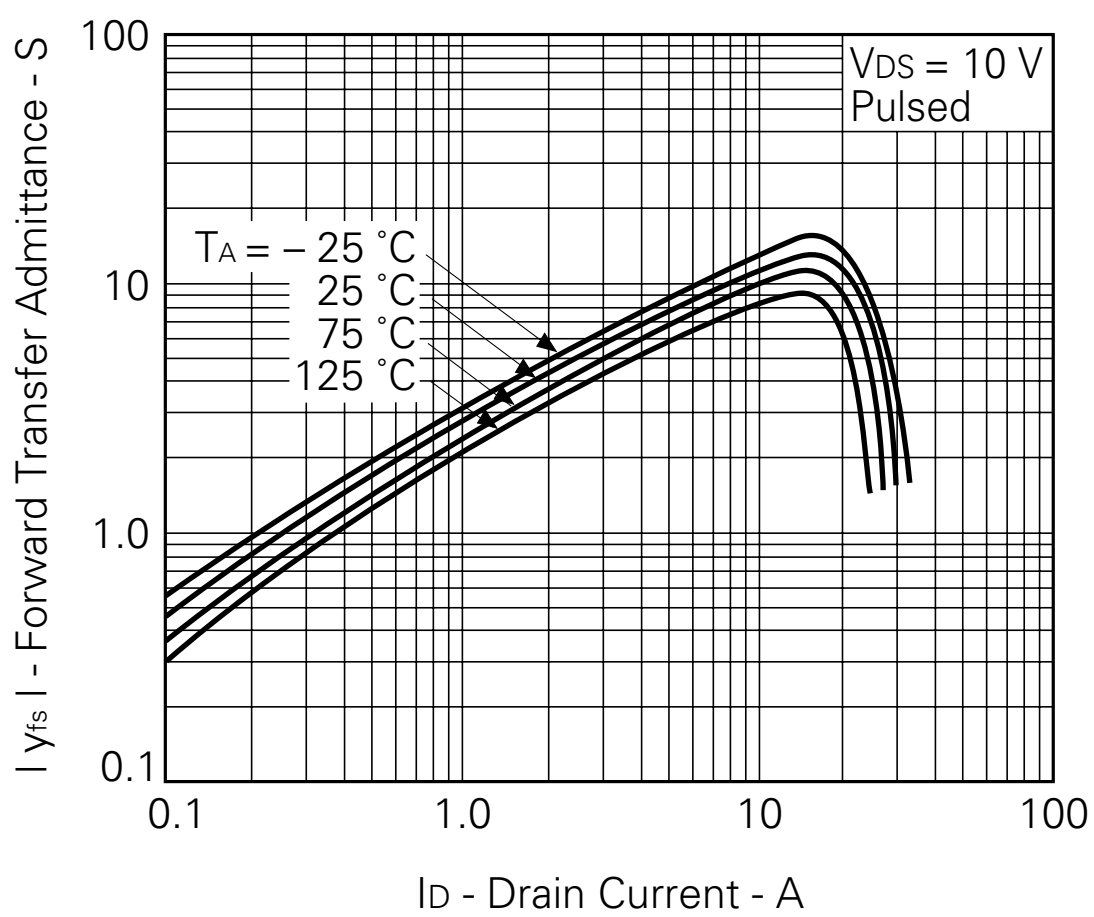

DRAIN TO SOURCE ON-STATE RESISTANCE vs. GATE TO SOURCE VOLTAGE

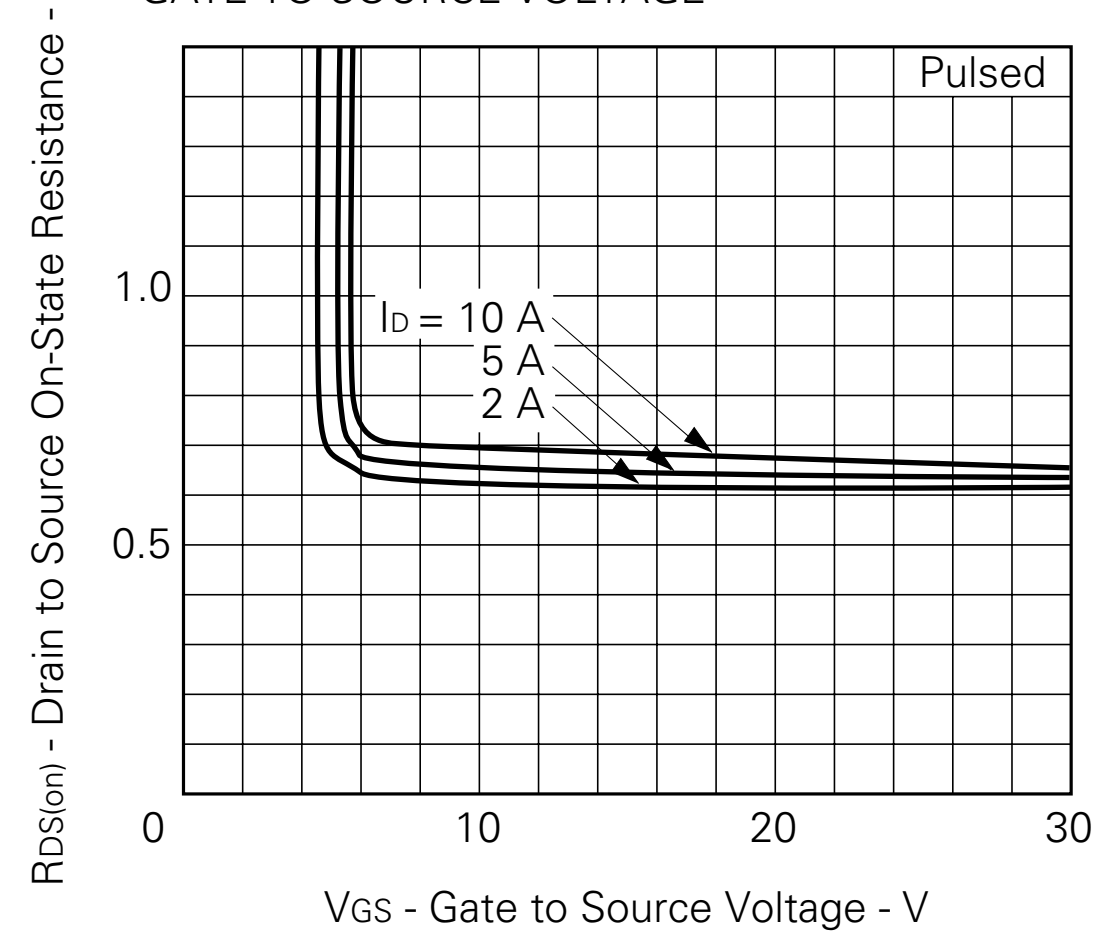

DRAIN TO SOURCE ON-STATE RESISTANCE vs. DRAIN CURRENT

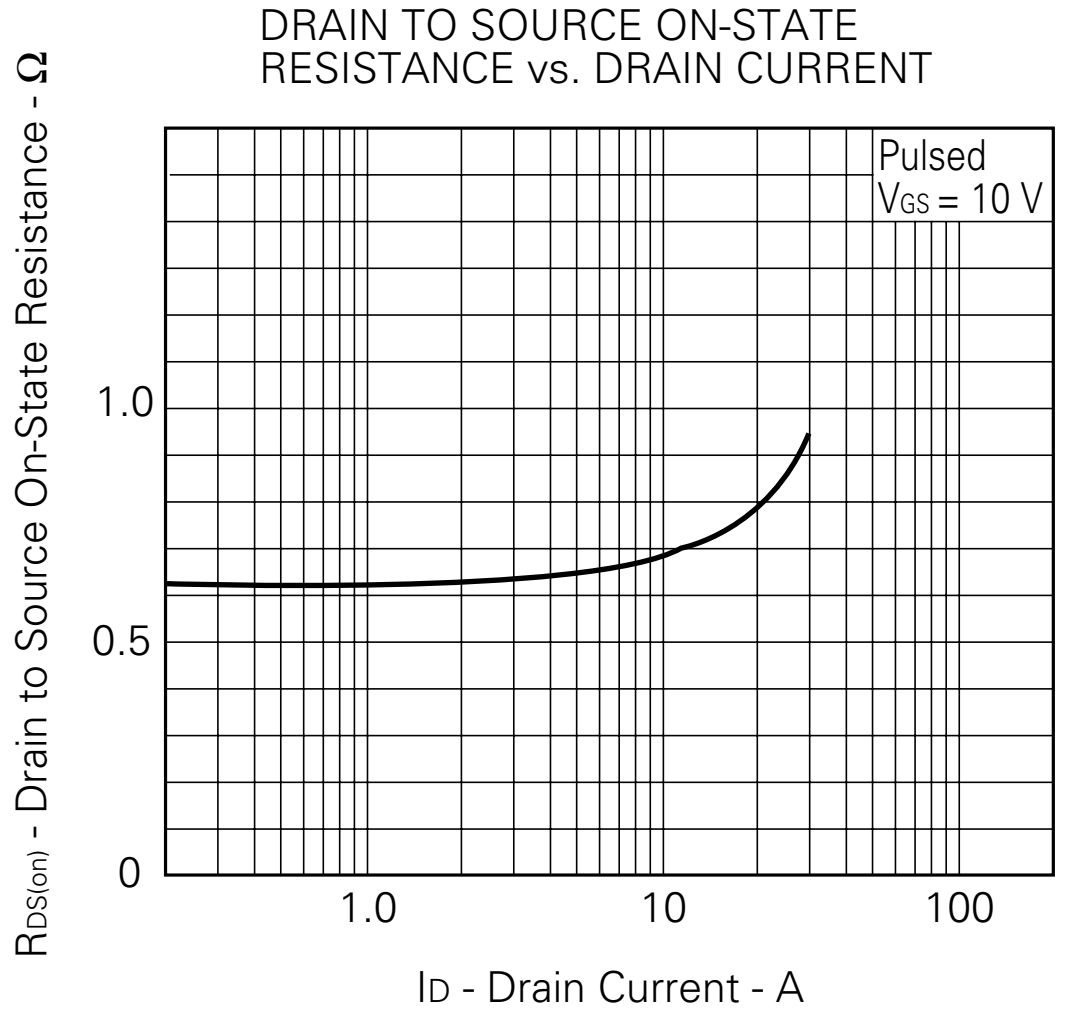

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

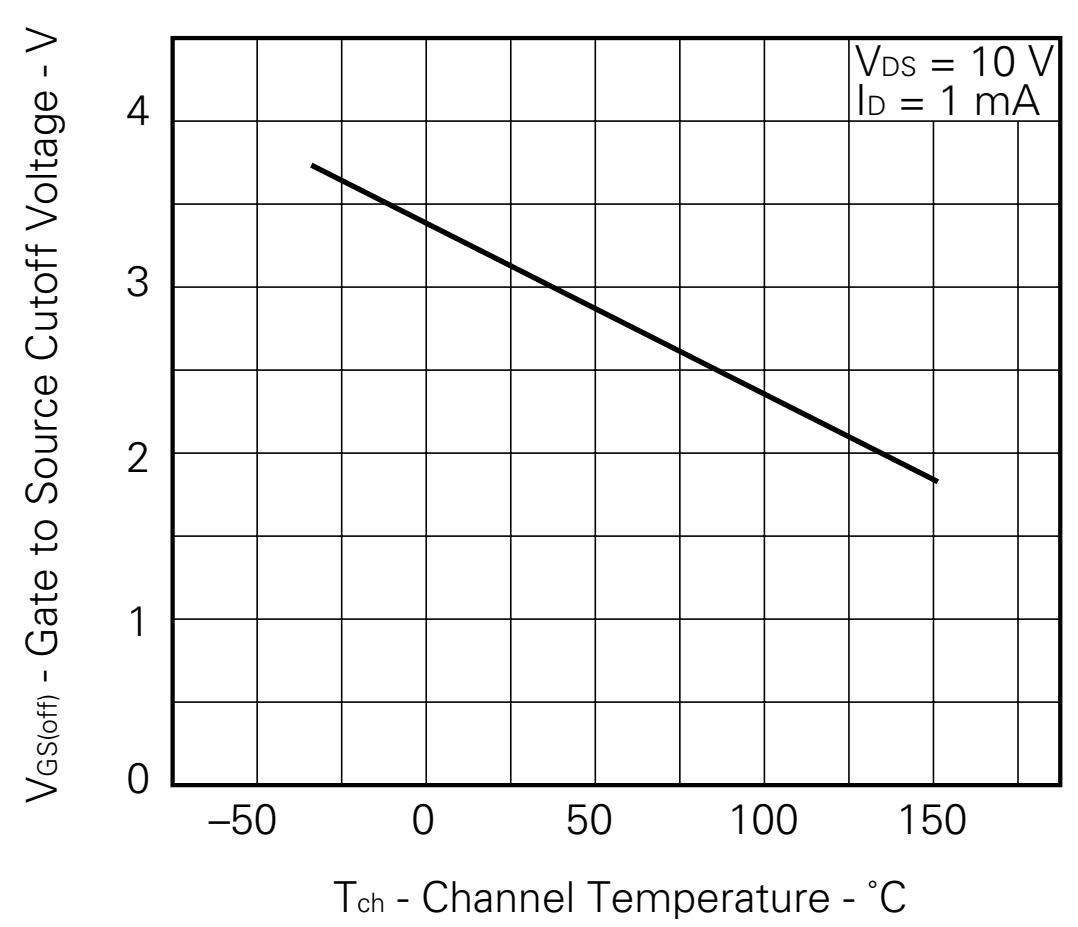

DRAIN TO SOURCE ON-STATE RESISTANCE vs. CHANNEL TEMPERATURE

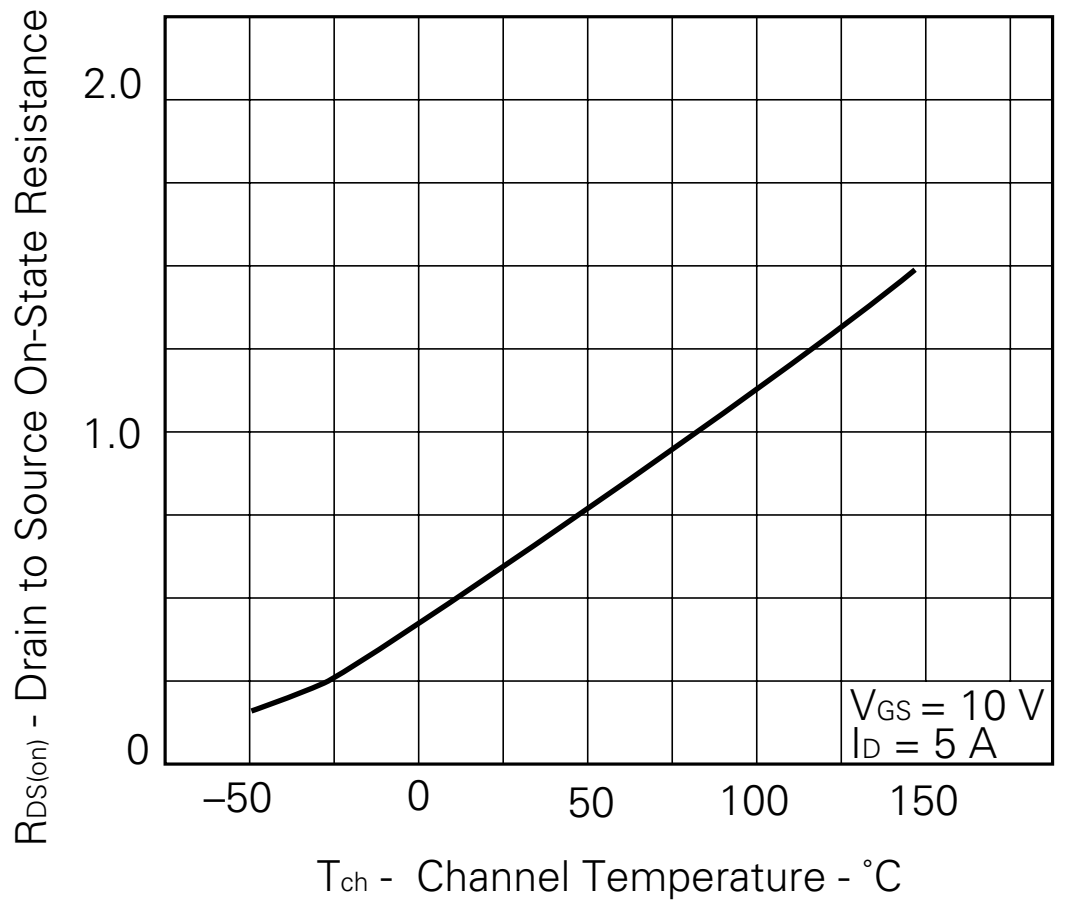

SOURCE TO DRAIN DIODE FORWARD VOLTAGE

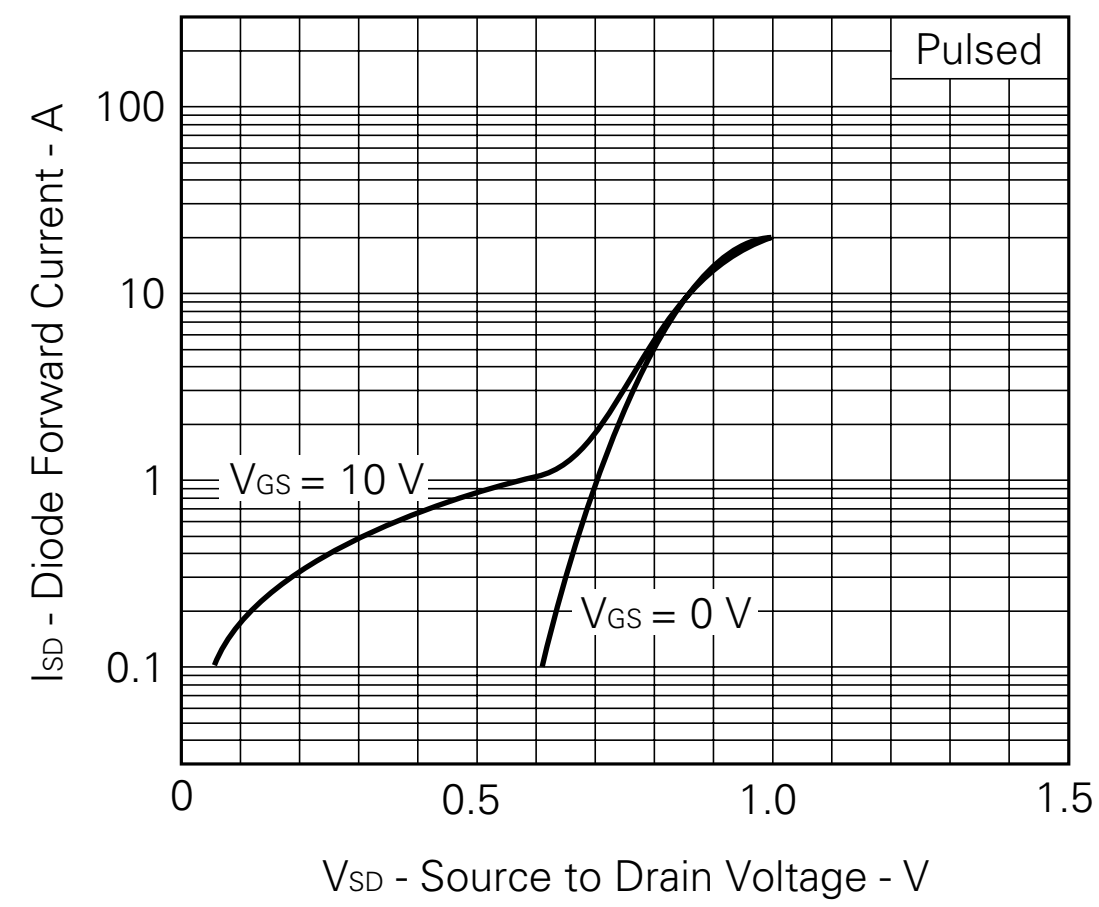

CAPACITANCE vs. DRAIN TO SOURCE VOLTAGE

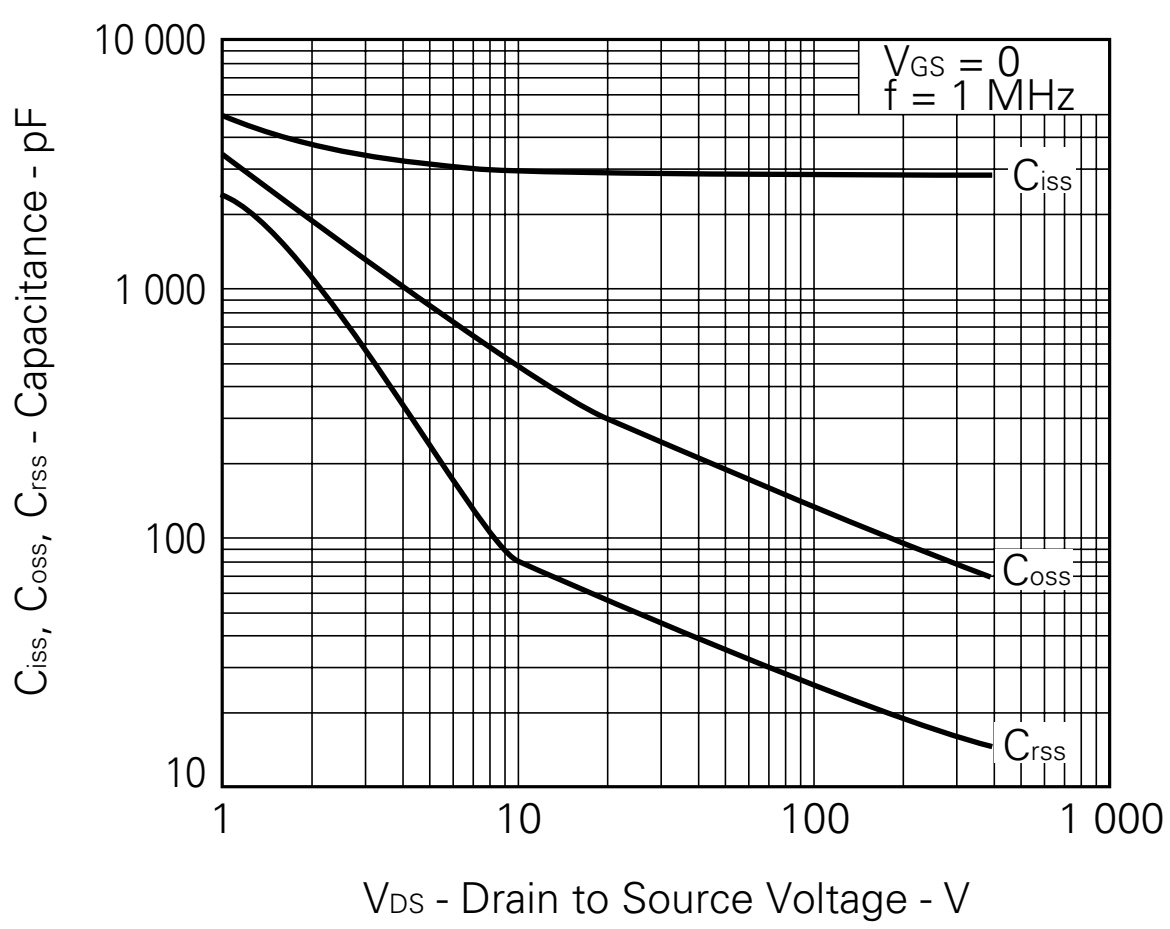

SWITCHING CHARACTERISTICS

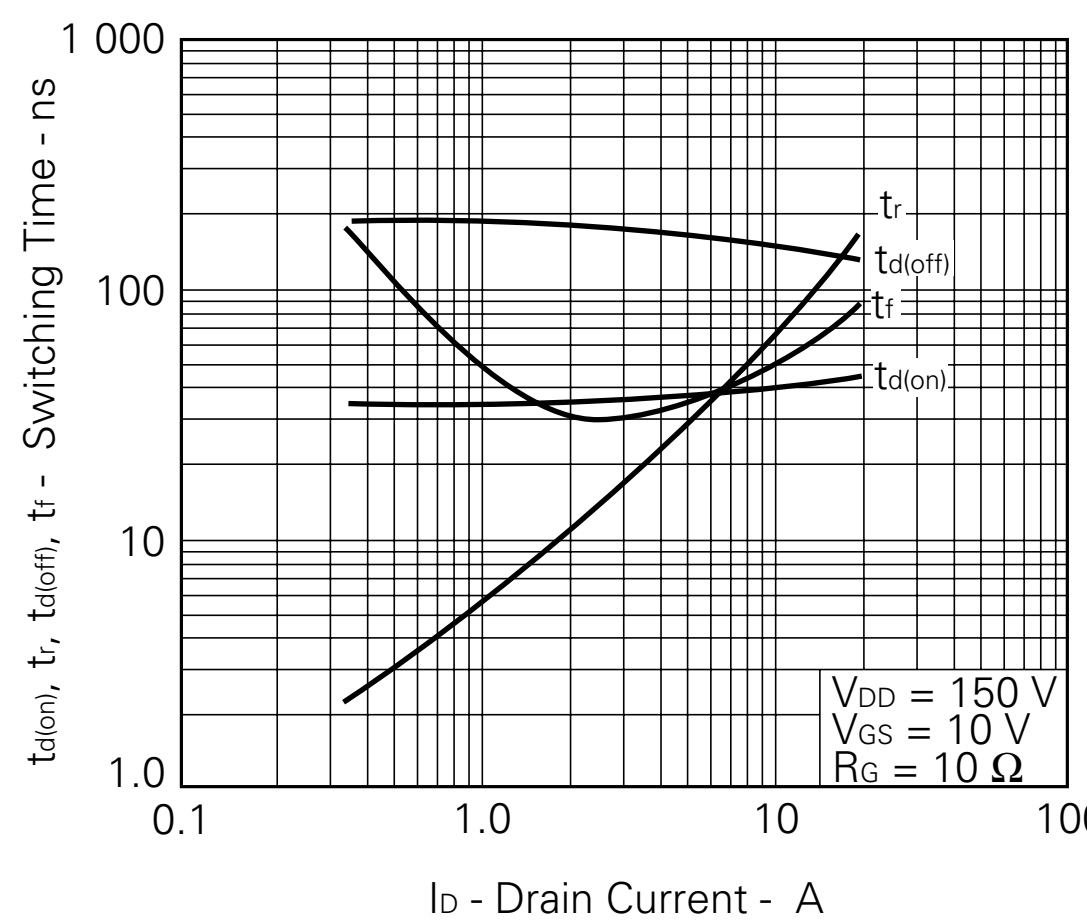

REVERSE RECOVERY TIME vs. DRAIN CURRENT

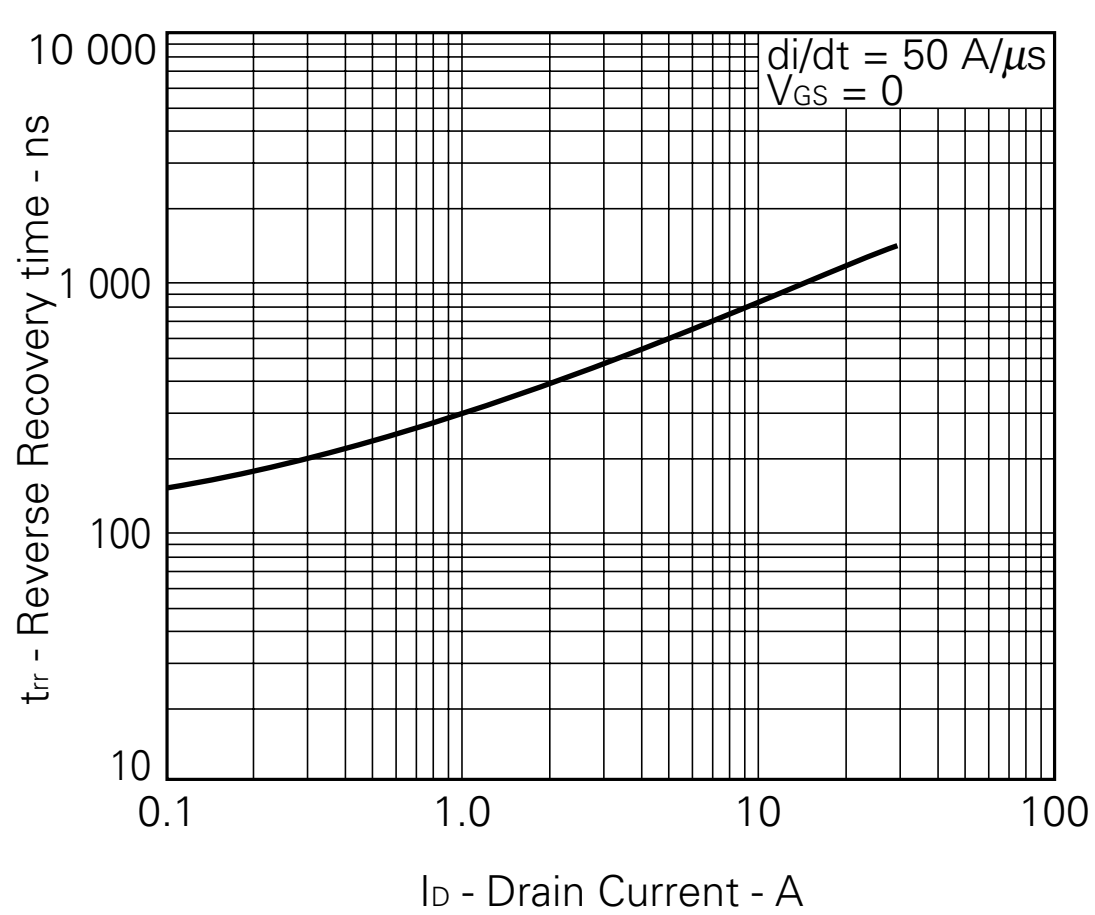

DYNAMIC INPUT/OUTPUT CHARACTERISTICS

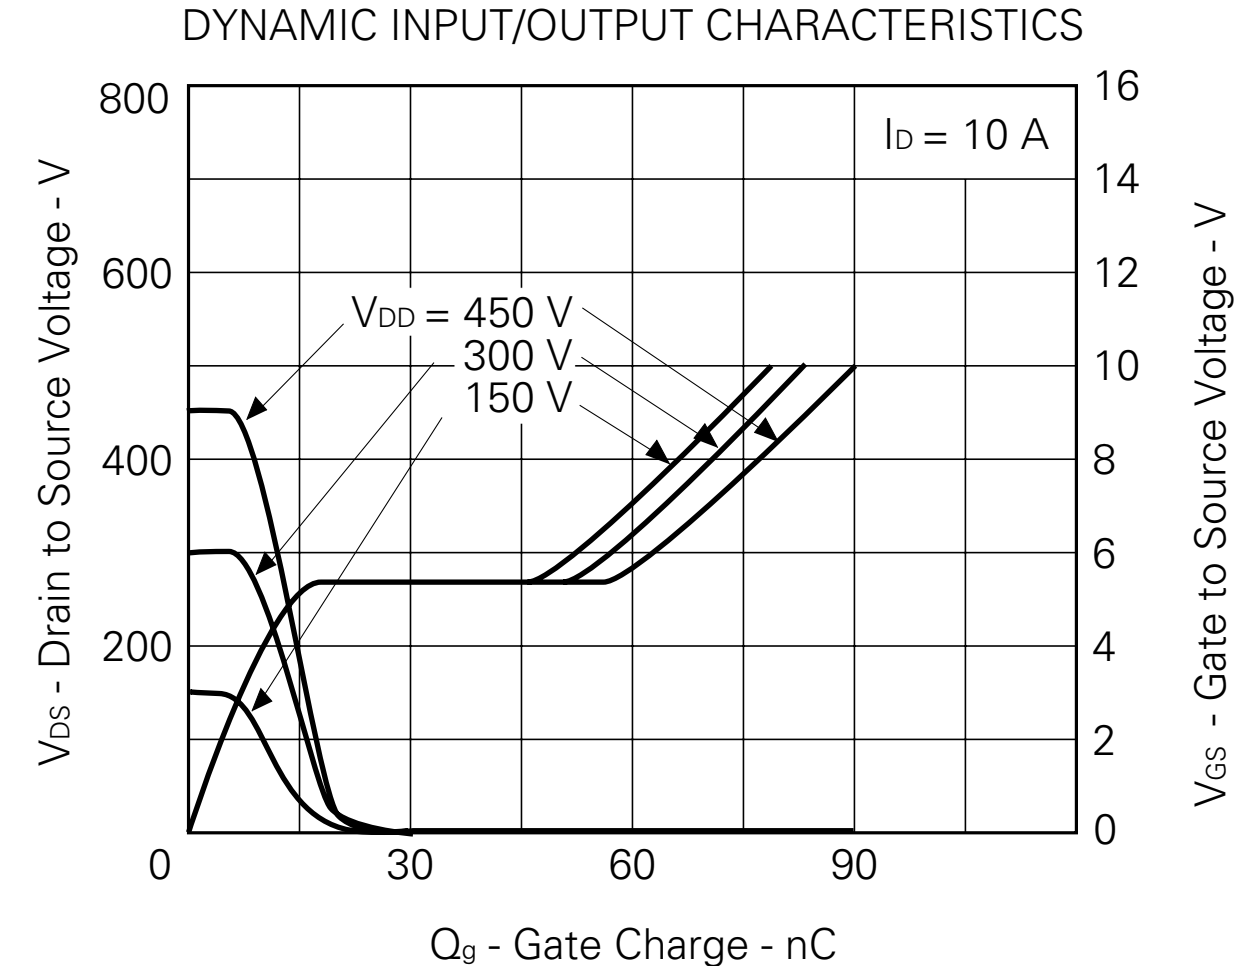

SINGLE AVALANCHE CURRENT vs.
INDUCTIVE LOAD

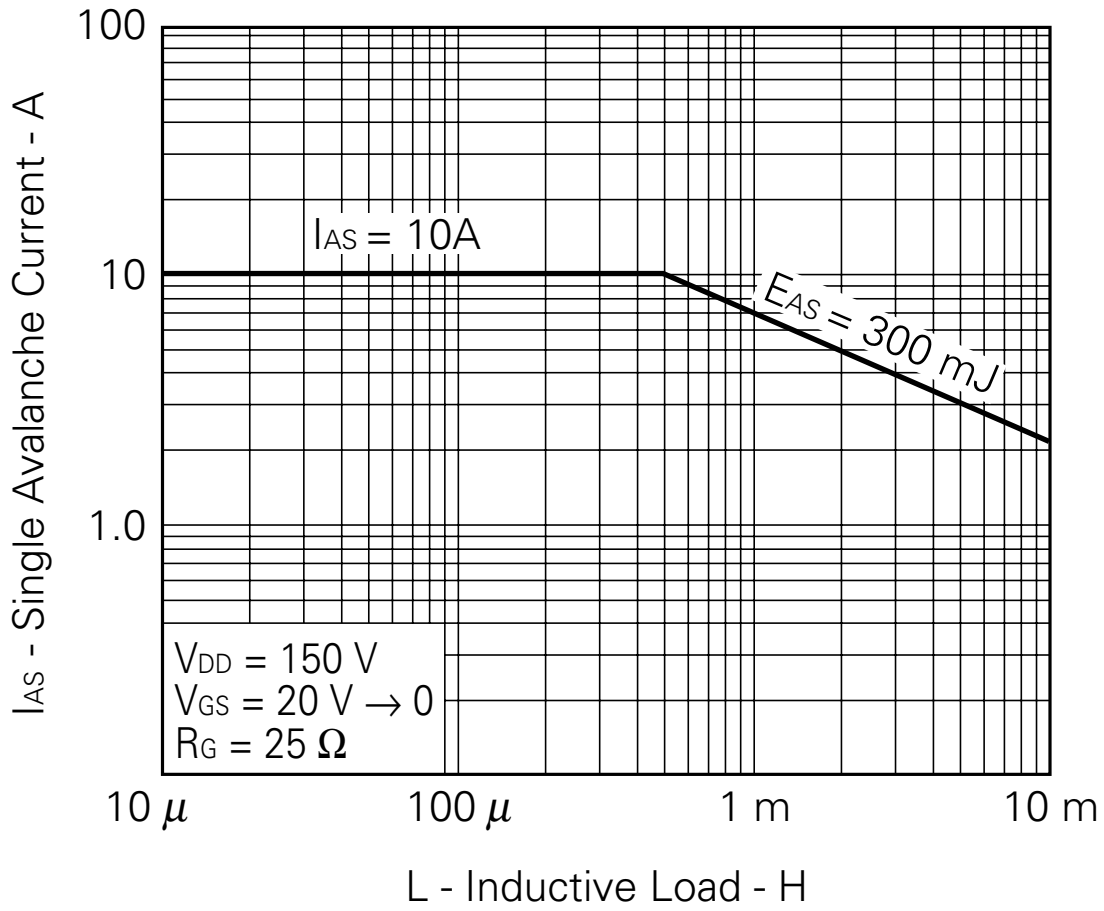

SINGLE AVALANCHE ENERGY
DERATING FACTOR

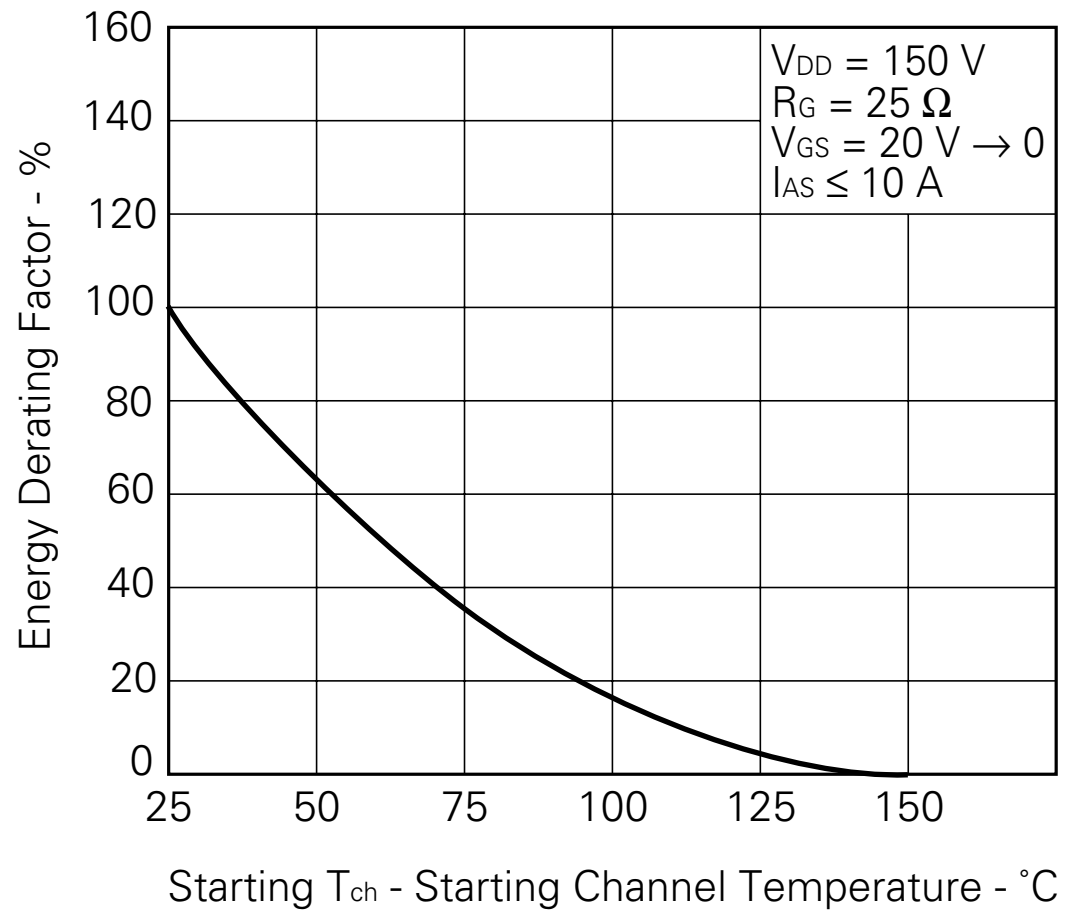

REFERENCE

Document Name	Document No.
NEC semiconductor device reliability/quality control system.	TEI-1202
Quality grade on NEC semiconductor devices.	IEI-1209
Semiconductor device mounting technology manual.	IEI-1207
Semiconductor device package manual.	IEI-1213
Guide to quality assurance for semiconductor devices.	MEI-1202
Semiconductor selection guide.	MF-1134
Power MOS FET features and application switching power supply.	TEA-1034
Application circuits using Power MOS FET.	TEA-1035
Safe operating area of Power MOS FET.	TEA-1037

[MEMO]

M4 94.11