


CMPD4150

HIGH CURRENT
HIGH SPEED
SWITCHING DIODE



SOT-23 CASE

CentralTM
Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPD4150 type is an ultra-high speed silicon switching diode manufactured by the epitaxial planar process, in an epoxy molded surface mount package, designed for high speed switching applications.

MARKING CODE: ABA

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)


	SYMBOL		UNITS
Continuous Reverse Voltage	V_R	50	V
Peak Repetitive Reverse Voltage	V_{RRM}	50	V
Continuous Forward Current	I_F	250	mA
Peak Repetitive Forward Current	I_{FRM}	250	mA
Forward Surge Current, $t_p=1 \mu\text{s}$	I_{FSM}	4.0	A
Forward Surge Current, $t_p=1 \text{ s}$	I_{FSM}	1.0	A
Power Dissipation	P_D	350	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	Θ_{JA}	357	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_R	$V_R=50\text{V}$		100	nA
V_F	$I_F=1.0\text{mA}$	0.54	0.62	V
V_F	$I_F=10\text{mA}$	0.66	0.74	V
V_F	$I_F=50\text{mA}$	0.76	0.86	V
V_F	$I_F=100\text{mA}$	0.82	0.92	V
V_F	$I_F=200\text{mA}$	0.87	1.0	V
C_T	$V_R=0, f=1.0 \text{ MHz}$		4.0	pF
t_{rr}	$I_R=I_F=10\text{mA}, R_L=100\Omega, \text{Rec. to } 1.0\text{mA}$		4.0	ns

R4 (13-November 2002)

SOT-23 CASE - MECHANICAL OUTLINE

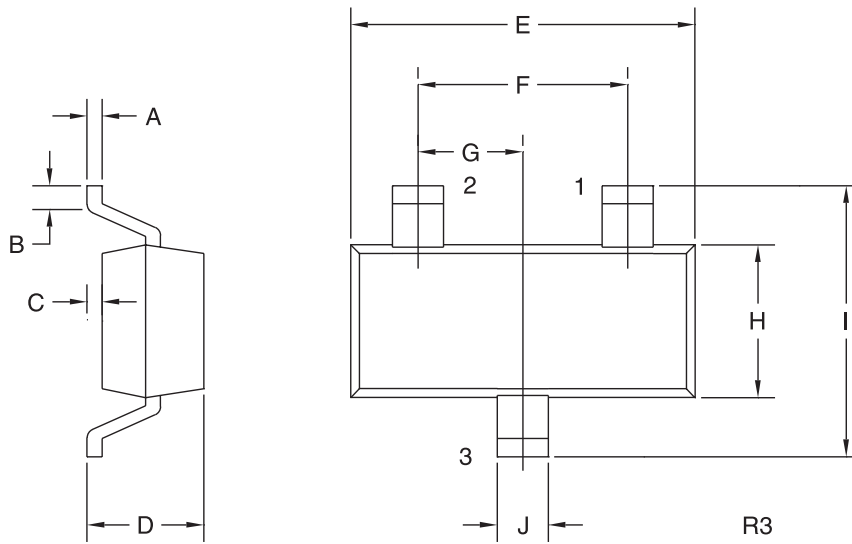

NO
CONNECTION



MARKING CODE: ABA

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075		1.90	
G	0.037		0.95	
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)