

ULTRA FAST RECOVERY RECTIFIER DIODES


FEATURES

- SUITED FOR SMPS
- LOW LOSSES
- LOW FORWARD AND REVERSE RECOVERY TIME
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY

DESCRIPTION

Low cost dual center tap rectifier suited for switch-mode power supply and high frequency DC to DC converters.

Packaged in TO220AB and ISOWATT220AB, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

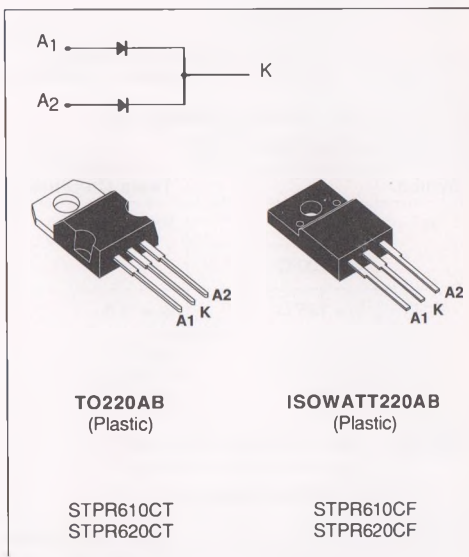

ABSOLUTE RATINGS (limiting values)

| Symbol | Parameter | | | Value | Unit | |
|------------------------------------|---|--------------|--------------------------------------|------------|--------------------------------|----|
| I _{F(RMS)} | RMS Forward Current | | | Per diode | 10 | A |
| I _{F(AV)} | Average Forward Current $\delta = 0.5$ | TO220AB | T _c = 125°C | Per diode | 3 | A |
| | | ISOWATT220AB | T _c = 120°C | Per device | 6 | |
| I _{FSM} | Surge Non Repetitive Forward Current | | T _p = 10 ms Sinusoidal | Per diode | 30 | A |
| T _{stg} T _j | Storage and Junction Temperature Range | | | | - 65 to + 150 - 65 to + 150 | °C |

| Symbol | Parameter | STPR | | Unit |
|------------------|---------------------------------|----------------|----------------|------|
| | | 610CT 610CF | 620CT 620CF | |
| V _{RRM} | Repetitive Peak Reverse Voltage | 100 | 200 | V |

THERMAL RESISTANCE

| Symbol | Parameter | | | Value | Unit |
|-----------|---------------|--------------|-----------------|-------|------|
| Rth (j-c) | Junction-case | TO220AB | Per diode total | 6.5 | °C/W |
| | | ISOWATT220AB | Per diode total | 8.5 | |
| Rth (c) | Coupling | | | | °C/W |

When the diodes 1 and 2 are used simultaneously :
 $\Delta T_{j(\text{diode } 1)} = P(\text{diode } 1) \times R_{th(\text{Per diode})} + P(\text{diode } 2) \times R_{th(c)}$

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

| Symbol | Tests Conditions | | | Min. | Typ. | Max. | Unit |
|-------------------|------------------------|-----------------------------------|--|------|------|------|------|
| I _R * | T _j = 25°C | V _R = V _{RRM} | | | | 50 | μA |
| | T _j = 100°C | | | | | 0.5 | mA |
| V _F ** | T _j = 125°C | I _F = 3 A | | | | 0.99 | V |
| | T _j = 125°C | I _F = 6 A | | | | 1.20 | |
| | T _j = 25°C | I _F = 6 A | | | | 1.25 | |

Pulse test : * tp = 5 ms, duty cycle < 2 %
 ** tp = 380 μs, duty cycle < 2%

RECOVERY CHARACTERISTICS

| Symbol | Tests Conditions | | | Min. | Typ. | Max. | Unit |
|-----------------|-----------------------|------------------------|------------------------|--|------|------|------|
| t _{rr} | T _j = 25°C | I _F = 0.5 A | I _R = 1 A | I _{rr} = 0.25 A | | 30 | ns |
| t _{fr} | T _j = 25°C | I _F = 1 A | t _r = 10 ns | V _{FR} = 1.1 x V _F | 20 | | ns |
| V _{FP} | T _j = 25°C | I _F = 1 A | t _r = 10 ns | | 3 | | V |

To evaluate the conduction losses use the following equation :
 $P = 0.78 \times I_F(\text{AV}) + 0.070 I_F^2(\text{RMS})$

Fig.1 : Average forward power dissipation versus average forward current. (Per diode)

Fig.2 : Peak current versus form factor. (Per diode)

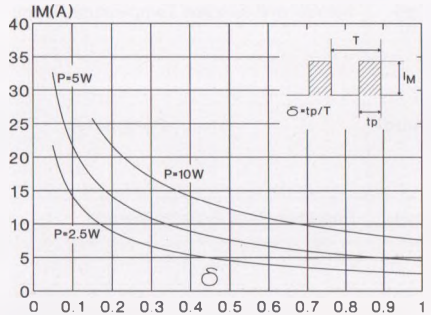
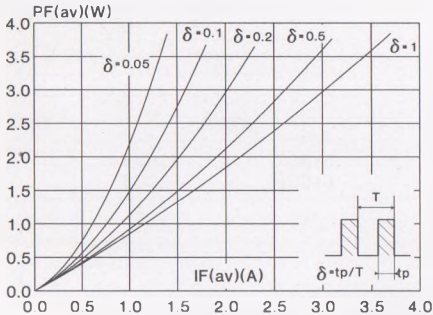


Fig.3 : Average current versus ambient temperature.
(duty cycle : 0.5) (TO220AB)

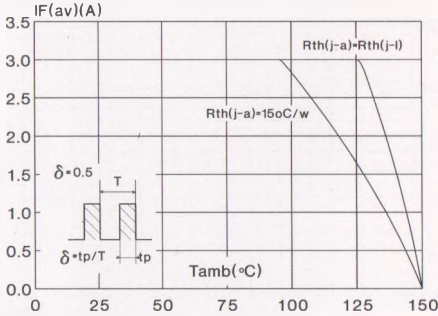


Fig.4 : Average current versus ambient temperature.
(duty cycle : 0.5) (ISOWATT220AB)

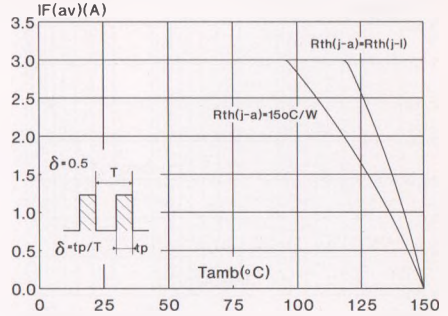


Fig.5 : Non repetitive surge peak forward current versus overload duration.
(Maximum values) (TO220AB) (Per diode)

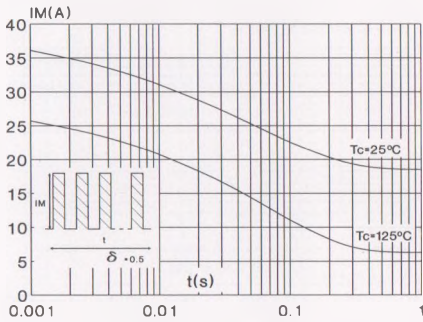


Fig.6 : Non repetitive surge peak forward current versus overload duration.
(Maximum values) (ISOWATT220AB) (Per diode)

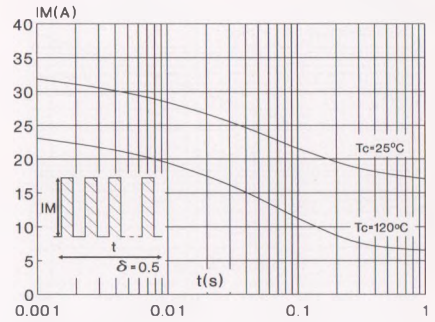


Fig.7 : Relative variation of thermal transient impedance junction to case versus pulse duration.
(TO220AB) (Per diode)

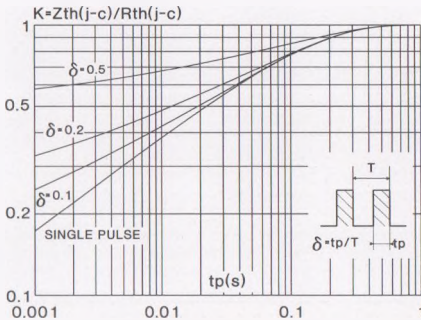


Fig.8 : Relative variation of thermal transient impedance junction to case versus pulse duration.
(ISOWATT220AB) (Per diode)

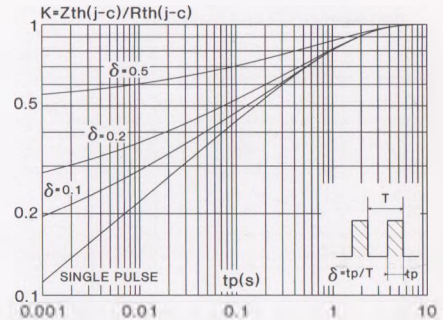


Fig.9 : Forward voltage drop versus forward current. (Maximum values) (Per diode)

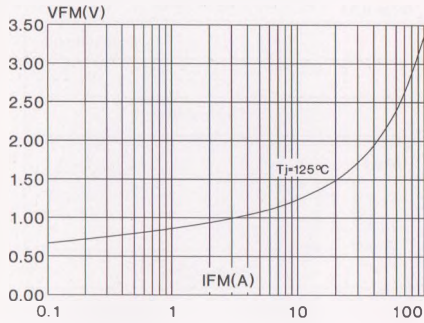


Fig.10 : Junction capacitance versus reverse voltage applied. (Typical values) (Per diode)

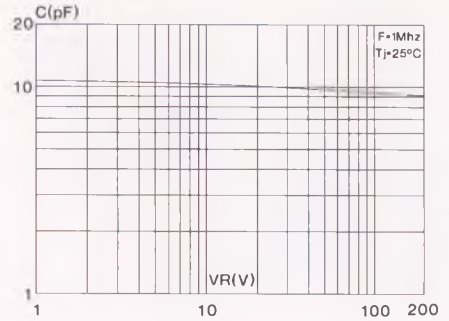


Fig.11 : Recovery charge versus dIF/dt. (Per diode)

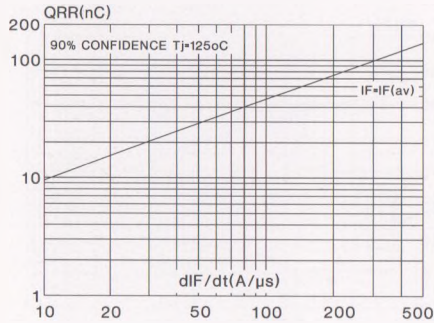


Fig.12 : Peak reverse current versus dIF/dt. (Per diode)

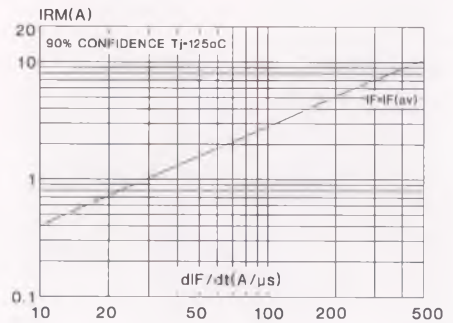


Fig.13 : Dynamic parameters versus junction temperature. (Per diode)

