
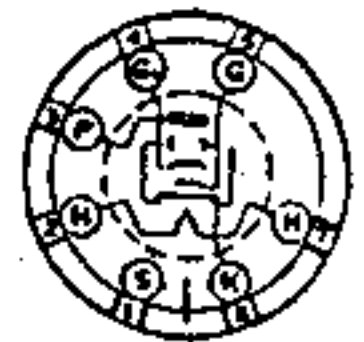


25 L 6
25 L 6-G

25 L 6
25 L 6-G

BEAM POWER TETRODE
(E)

Vf	=		25	V.
If	=		0,3	A.
Va(max)	=	110	110	V.
Vg2	=	110	110	V.
Vg	=	-7,5	-7,5	V.
Ia	=	49-54	50	mA.
Ig2	=	4-9	4-11	mA.
Ri	=	10.000	10.000	Ω
S	=	8,2	8,2	mA/V.
Wo(10%)	=	2,1	2,2	Wtt.
Ra	=	1.500	2.000	Ω
Rk	=	1.360	1.340	Ω

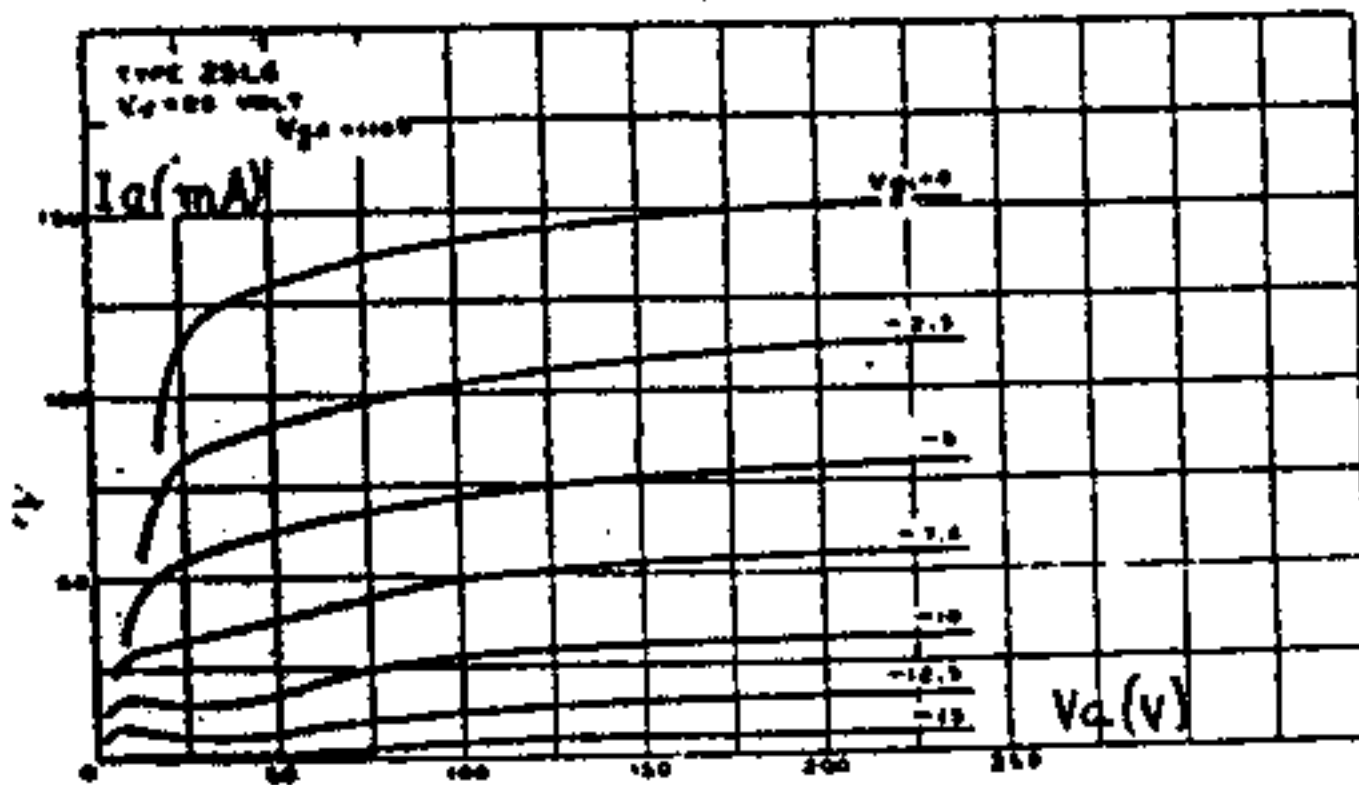

25L6 (G)