


Pentoda regulacyjna

7A7

Wzmacniacz w. cz. i p. cz.

Loktal

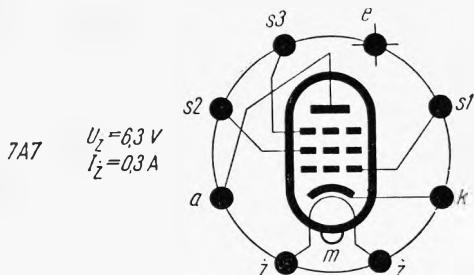

Wartości robocze

U_a	100	250	V		
U_{s2}	100	100	V		
U_{s1}	-1...-35	-3...-35	V		
I_a	13	—	9,2	—	mA
I_{s2}	4	—	2,6	—	mA
S_a	2,3	...0,01	2... 0,01	mA/V	
K_a	—	1600	—	V/V	
ϱ_a	120	—	800	—	k Ω
R_k	60	260	Ω		

Wartości maksymalne

U_{amax}	300	V
U_{s2max}	125	V
P_{amax}	4	W
R_{s1max}	2	M Ω

Pojemności

C_{wej}	6	pF
$C_{s/a}$	0,007	pF

TYPY PODOBNE

6 SK 7, EF 11, 7A7 LM

