


Heptoda

7Q7

Oscylator i mieszacz

Loktal

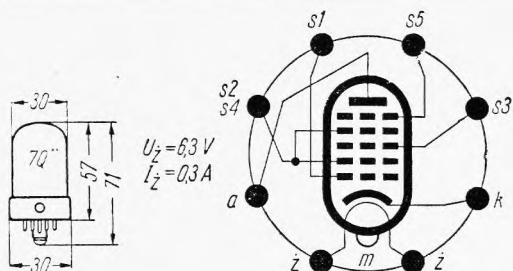

Wartości robocze

U_a	100	250	V
$U_{s2,3,4}$	100	100	V
U_{s1}	-2....	-2....	-35 V
U_{s5}	0	0	V
I_a	3,3	3,4	mA
I_{s2}	8,5	8,0	mA
S_p	—	0,55...	0,002 mA/V
ρ_a	0,5	0,8	M Ω
R_k	—	170	Ω

Wartości maksymalne

U_{amax}	300	V
P_{amax}	1	W
R_{s1max}	20	k Ω
I_{kmax}	14	mA
U_{zmax}	7	V
I_{zmax}	0,32	A

Pojemności

C_{wej}	9,2	pF
C_{sla}	0,14	pF

TYPY PODOBNE

6 SA 7, ECH 81