



893-A

893-A

TRANSMITTING TRIODE WATER & FORCED-AIR COOLED

GENERAL DATA


Electrical:

Filament: Tungsten, Three-Section Type
 Excitation . . . 1 ϕ AC, 3 ϕ AC, 6 ϕ AC, or DC
 Voltage per strand 10 volts
 Current per terminal 61 amp.
(See FILAMENT CONNECTIONS AND EXCITATION CIRCUITS under this type)
 Starting - The current per terminal must never exceed 120 amperes, even momentarily.

Amplification Factor 36
 Direct Interelectrode Capacitances (Approx.):
 Grid to Plate 33 μmf
 Grid to Filament 48 μmf
 Plate to Filament 3.2 μmf

Physical:

Terminal Connections:
 Term.1 - Fil. No.3
 Term.2 - Fil. No.2
 Term.3 - Fil. No.1
 Term.4 - Fil. No.2
 Term.5 - Fil. No.3
 Term.6 - Fil. No.1



G - Grid Cap Terminal
 P - Water-cooled Plate Terminal

TERMINAL NO.5 IS ABOVE GRID ARM

Mounting Position. Vertical only, glass end up
 Overall Length 25-5/8" \pm 1-1/8"
 Greatest Radius. 6" \pm 3/8"
 Cap. No.3935
 Base (with nozzle for air-cooling of filament seal) No.6628
 Water Jacket Type UT-1290-A
 Gasket RCA Stock No.17880

Cooling - *Water flow* of 8 to 15 gallons per minute must start before application of any voltages and continue for at least 2 minutes after removal of voltages. Water temperature must not exceed 70°C under any conditions of operation.
Air flow of 2 cubic feet per minute in nozzle of filament base before application of any voltages is required to limit temperature of filament seal to 150°C.

This tube can often be operated at reduced filament voltage as explained on sheet TYPES OF CATHODES in General Section.

A-F POWER AMPLIFIER & MODULATOR - Class B

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE 20000 max. volts
 MAX.-SIGNAL D-C PLATE CURRENT* 4 max. amp.
 MAX.-SIGNAL PLATE INPUT* 60 max. kw
 PLATE DISSIPATION* 20 max. kw

Typical Operation:

Unless otherwise specified, values are for 2 tubes

D-C Plate Voltage 12000 15000 18000 volts

* Averaged over any audio-frequency cycle of sine-wave form.



TRANSMITTING TRIODE

(continued from preceding page)

D-C Grid Voltage	-260	-350	-450	. . . volts
Peak A-F Grid-to-Grid Voltage	1480	1560	1720	. . . volts
Zero-Sig. D-C Plate Cur. . .	0.8	0.8	0.8	. . . amp.
Max.-Sig. D-C Plate Cur. . .	7.0	6.0	5.5	. . . amp.
Effective Load Res. (plate-to-plate)	4000	6000	8000	. . . ohms
Max.-Signal Driving Power.	220	190	140	<u>approx. watts</u>
Max.-Signal Power Output . .	52	60	70	<u>approx. kw</u>

R-F POWER AMPLIFIER - Class B Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE	20000 max.	. volts
D-C PLATE CURRENT	2 max.	. amp.
PLATE INPUT	32 max.	. kw
PLATE DISSIPATION	20 max.	. kw

Typical Operation:

D-C Plate Voltage	12000	15000	15000	. . . volts
D-C Grid Voltage	-250	-340	-340	. . . volts
Peak R-F Grid Voltage . . .	350	395	450	. . . volts
D-C Plate Current	1.5	1.5	2.0	. . . amp.
Driving Power # **	130	150	200	<u>approx. watts</u>
Power Output #	6	7.5	10	<u>approx. kw</u>

**At crest of a-f cycle with modulation factor of 1.0.

PLATE-MODULATED R-F POWER AMPLIFIER - Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE	12000 max.	. volts
D-C GRID VOLTAGE	-3000 max.	. volts
D-C PLATE CURRENT	2 max.	. amp.
D-C GRID CURRENT	0.4 max.	. amp.
PLATE INPUT	24 max.	. kw
PLATE DISSIPATION	12 max.	. kw

Typical Operation:

D-C Plate Voltage	10000	10000	12000	. . . volts
D-C Grid Voltage	-800	-800	-1000	. . . volts
Peak R-F Grid Voltage . . .	1200	1280	1500	. . . volts
D-C Plate Current	1.5	2.0	2.0	. . . amp.
D-C Grid Current #	0.10	0.16	0.14	<u>approx. amp.</u>
Driving Power #	120	210	210	<u>approx. watts</u>
Power Output	11	15	18	<u>approx. kw</u>

: See next page.



893-A

893-A

TRANSMITTING TRIODE

(continued from preceding page)

R-F POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

*Key-down conditions per tube without modulation***

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE	20000 max.	. . . volts
D-C GRID VOLTAGE	-3000 max.	. . . volts
D-C PLATE CURRENT	4 max.	. . . amp.
D-C GRID CURRENT	0.4 max.	. . . amp.
PLATE INPUT	70 max.	. . . kw
PLATE DISSIPATION	20 max.	. . . kw

Typical Operation:

D-C Plate Voltage	12000	15000	18000	. . . volts
D-C Grid Voltage	-800	-900	-1000	. . . volts
Peak R-F Grid Voltage	1430	1520	1630	. . . volts
D-C Plate Current	3.5	3.6	3.6	. . . amp.
D-C Grid Current #	0.26	0.25	0.21	<u>approx. amp.</u>
Driving Power #	360	370	340	<u>approx. watts</u>
Power Output	30	40	50	<u>approx. kw</u>

Subject to wide variations as explained on sheet TUBE RATINGS in General Section.

**Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

Data on operating frequencies for the 893-A are given on the sheet TRANS.TUBE RATINGS vs FREQUENCY.

CURVES

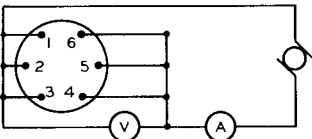
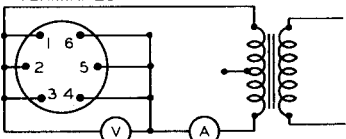
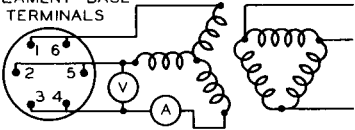
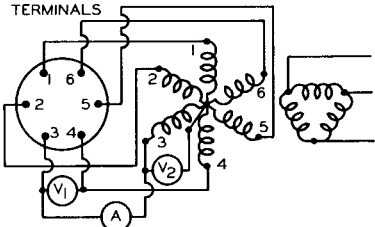
FOR THE 893-A ARE THE SAME AS
THOSE FOR TYPE 893A-R



893-A

893-A

FILAMENT CONNECTIONS AND EXCITATION CIRCUITS

<p>D-C FILAMENT EXCITATION</p>	<p>FILAMENT BASE TERMINALS</p>  <p>$V = 20$ VOLTS $A = 183$ AMP.</p>
<p>SINGLE-PHASE A-C FILAMENT EXCITATION</p>	<p>FILAMENT BASE TERMINALS</p>  <p>$V = 20$ VOLTS $A = 183$ AMP.</p>
<p>THREE-PHASE A-C FILAMENT EXCITATION</p>	<p>FILAMENT BASE TERMINALS</p>  <p>$V = 17.3$ VOLTS $A = 122$ AMP.</p>
<p>SIX-PHASE A-C FILAMENT EXCITATION</p> <p>NOTE: TERMINALS MUST BE CONNECTED IN CORRECT PHASE RELATION AS SHOWN</p>	<p>FILAMENT BASE TERMINALS</p>  <p>$V_1 = 10$ VOLTS $V_2 = 10$ VOLTS $A = 61$ AMP.</p>