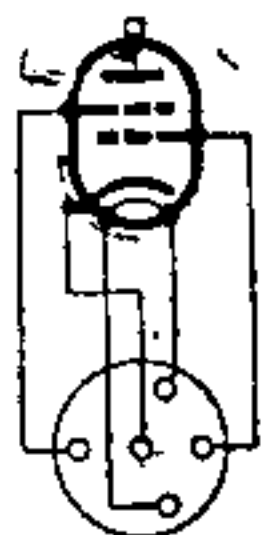


**E 442 S****E 442 S****TETRODE****(HF - MF - A . DET<sub>w</sub> - LF<sub>w</sub>)**

V <sub>f</sub>	=	4,0	V.
I <sub>f</sub>	=	1,0	A.
V <sub>a</sub> (max)	=	200	V.
I <sub>a</sub>	=	4,0	mA.
V <sub>g1</sub>	=	-2,0	V.
V <sub>g2</sub>	=	60	V.
I <sub>g2</sub>	=	0,5	mA.
S(max)	=	1,1	mA/V.
S(norm)	=	1,0	mA/V.
g	=	400	
R <sub>i</sub> (norm)	=	0,4	M.Ω
C <sub>ag1</sub>	=	0,02	μμF.

**E442S**