


Pentoda w. cz.

EF 12 Spec.


Telefunken

Wzm. m. cz. – wzmacniacze mikrofonowe

Stalowy



$U_z = 6,3V$
 $I_z = 200mA$



Wartości robocze


U_a	250	V
U_{s2}	100	V
U_{s1}	-2	V
I_a	3	mA
I_{s2}	0,65	mA
S_a	1,7	mA/V
ρ_a	1,3	M Ω

Wartości graniczne

$U_{a,max}$	300	V
$U_{s2,max}$	300	V
$P_{a,max}$	2	W
$P_{s2,max}$	0,7	W

Pojemności

C_{wej}	5,2	pF
C_{wyj}	4,5	pF
C_{s1a}	< 0,007	pF
$C_{s1/w}$	< 0,03	pF

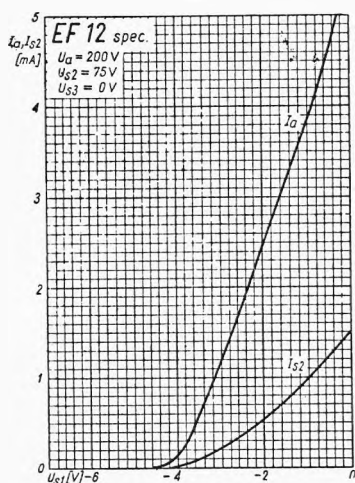

TYPY PODOBNE

6 SJ 7, EF 6, EF 36, EF 40, EF 86

