


Pentoda w. cz.

**EF 12 Spec.**

Telefunken


Wzm. m. cz. – wzmacniacze mikrofonowe

Stalowy



$$U_z = 6,3V$$

$$I_z = 200mA$$



Wartości robocze


$U_a$	250	V
$U_{s2}$	100	V
$U_{s1}$	-2	V
$I_a$	3	mA
$I_{s2}$	0,65	mA
$S_a$	1,7	mA/V
$\rho_a$	1,3	M $\Omega$

Wartości graniczne

$U_{a\max}$	300	V
$U_{s2\max}$	300	V
$P_{a\max}$	2	W
$P_{s2\max}$	0,7	W

Pojemności

$C_{wej}$	5,2	pF
$C_{wyj}$	4,5	pF
$C_{s/a}$	< 0,007	pF
$C_{s1/w}$	< 0,03	pF

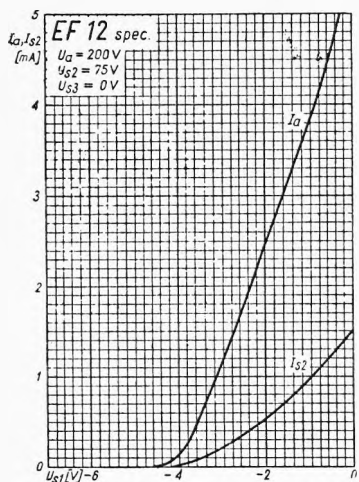

TYPY PODOBNE

6 SJ 7, EF 6, EF 36, EF 40, EF 86

