




2SC1454

NPN EPITAXIAL SILICON TRANSISTOR

LOW FREQUENCY POWER AMPLIFIER

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	300	V
Collector-Emitter Voltage	V_{CE0}	250	V
Emitter-Base voltage	V_{EB0}	7	V
Collector Current (DC)	I_C	40	A
Collector Dissipation ($T_c=25^\circ\text{C}$)	P_C	50	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-50~150	$^\circ\text{C}$

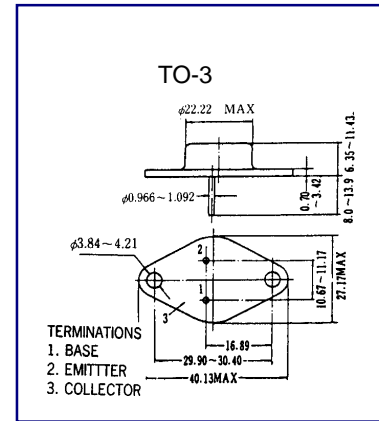

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CB0}	$V_{CB} = 300V, I_E = 0$			100	μA
Emitter Cutoff Current	I_{EB0}	$V_{EB} = 7V, I_C = 0$			100	μA
DC Current Gain	h_{FE1}	$V_{CE} = 5V, I_C = 1A$	20			
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3A, I_B = 0.3A$			1.0	V
Current Gain Bandwidth Product	f_T	$V_{CE} = 5V, I_C = 0.5A$		8		MHZ