

# Power Transistor (80V, 1A)

## 2SD1898 / 2SD1733 / 2SD1768S / 2SD1863 / 2SD1381F


● Features

- 1) High  $V_{CE0}$ ,  $V_{CE0} = 80V$
- 2) High  $I_C$ ,  
 $I_C = 1A$  (DC)
- 3) Good  $h_{FE}$  linearity.
- 4) Low  $V_{CE(sat)}$ .
- 5) Complements the  
2SB1260 / 2SB1241 / 2SB1181.

● Structure

Epitaxial planar type  
NPN silicon transistor

● External dimensions (Units: mm)

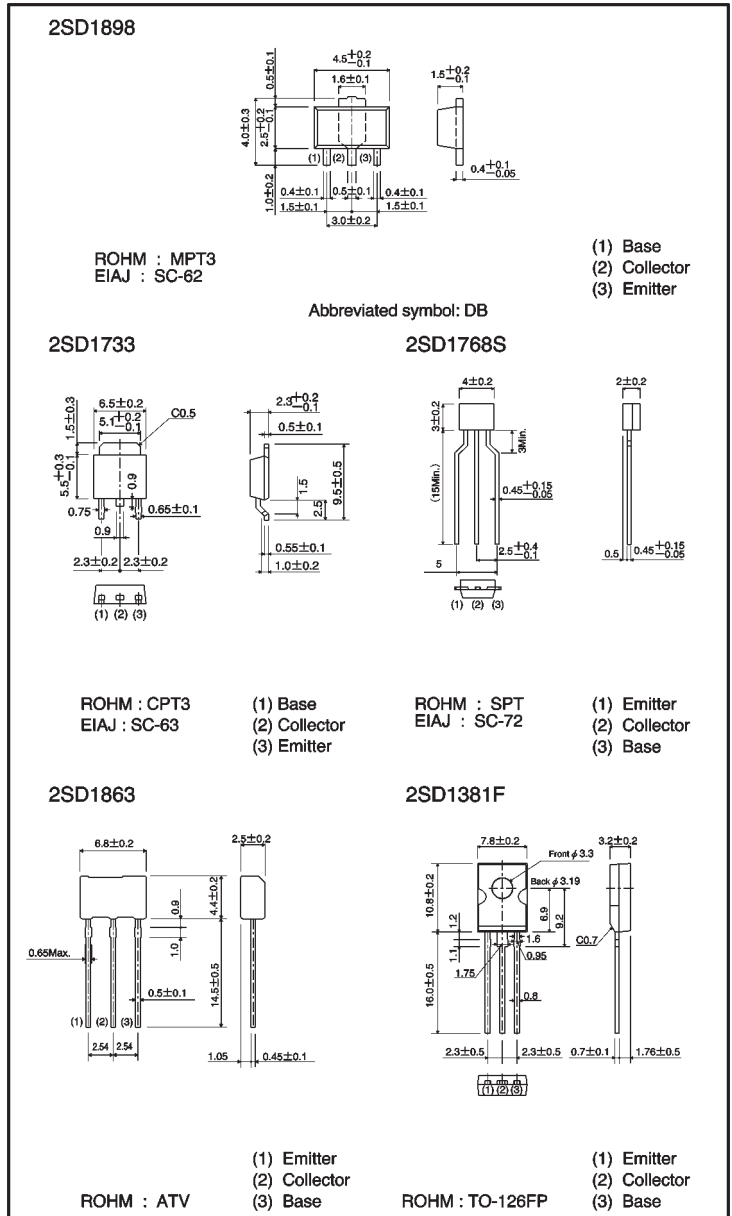

## ● Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit
Collector-base voltage		V <sub>CBO</sub>	100	V
Collector-emitter voltage		V <sub>CEO</sub>	80	V
Emitter-base voltage		V <sub>EBO</sub>	5	V
Collector current		I <sub>c</sub>	1	A (DC)
			2	A (Pulse) *1
Collector power dissipation	2SD1893	P <sub>c</sub>	0.5	W *3
			2	
	1			
	2SD1733		10	W (T <sub>c</sub> =25°C)
	2SD1768S		0.3	W *2
	2SD1863		1	
2SD1381F	1.2	W (T <sub>c</sub> =25°C)		
5				
Junction temperature		T <sub>j</sub>	150	°C
Storage temperature		T <sub>stg</sub>	-55~+150	°C

\*1 P<sub>w</sub>=20ms, duty=1 / 2\*2 Printed circuit board 1.7mm thick, collector copper plating 1cm<sup>2</sup> or larger.

\*3 When mounted on a 40×40×0.7mm ceramic board.

## ● Electrical characteristics (Ta = 25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage		BV <sub>CBO</sub>	100	—	—	V	I <sub>c</sub> =50 μA
Collector-emitter breakdown voltage		BV <sub>CEO</sub>	80	—	—	V	I <sub>c</sub> =1mA
Emitter-base breakdown voltage		BV <sub>EBO</sub>	5	—	—	V	I <sub>E</sub> =50 μA
Collector cutoff current		I <sub>CBO</sub>	—	—	1	μA	V <sub>CB</sub> =80V
Emitter cutoff current		I <sub>EBO</sub>	—	—	1	μA	V <sub>EB</sub> =4V
DC current transfer ratio	2SD1863	h <sub>FE</sub>	180	—	390	—	V <sub>CE</sub> =3V, I <sub>c</sub> =0.5A
	2SD1733, 2SD1898		82	—	390	—	
	2SD1768S		120	—	390	—	
	2SD1381F		82	—	270	—	
Collector-emitter saturation voltage		V <sub>CE(sat)</sub>	—	0.15	0.4	V	I <sub>c</sub> /I <sub>B</sub> =500mA/20mA
Transition frequency		f <sub>r</sub>	—	100	—	MHz	V <sub>CE</sub> =10V, I <sub>E</sub> =-50mA, f=100MHz
Output capacitance		C <sub>ob</sub>	—	20	—	pF	V <sub>CB</sub> =10V, I <sub>E</sub> =0A, f=1MHz

\* Measured using pulse current

●Packaging specifications and  $h_{FE}$

Type	$h_{FE}$	Package	Taping				Bulk
		Code	T100	TL	TP	TV2	—
		Basic ordering unit (pieces)	1000	2500	5000	2500	2000
2SD1898	PQR		○	—	—	—	—
2SD1733	PQR		—	○	—	—	—
2SD1768S	QR		—	—	○	—	—
2SD1863	R		—	—	—	○	—
2SD1381F	PQ		—	—	—	—	○

$h_{FE}$  values are classified as follows :

Item	P	Q	R
$h_{FE}$	82~180	120~270	180~390

●Electrical characteristic curves

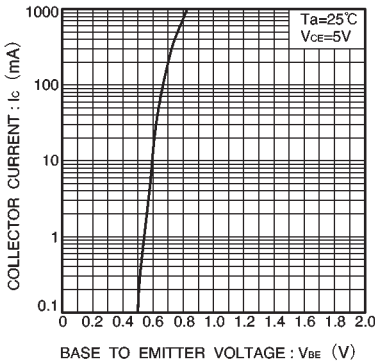


Fig.1 Grounded emitter propagation characteristics

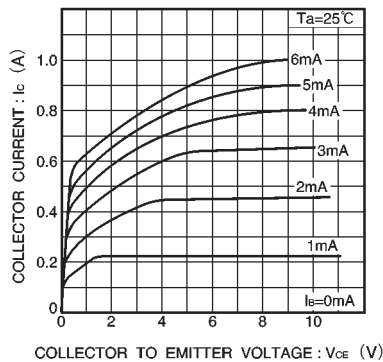


Fig.2 Grounded emitter output characteristics

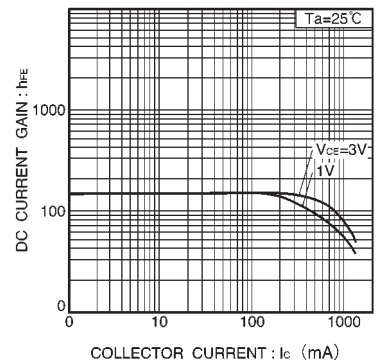


Fig.3 DC current gain vs. collector current

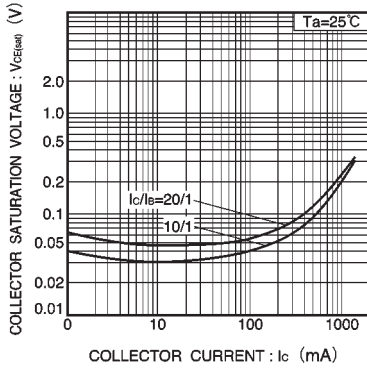


Fig.4 Collector-emitter saturation voltage vs. collector current

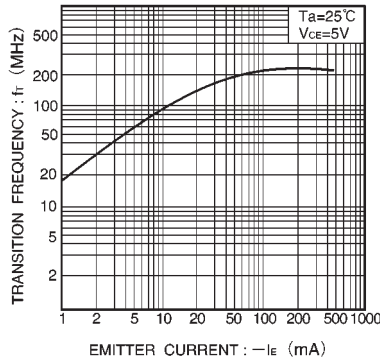


Fig.5 Gain bandwidth product vs. emitter current

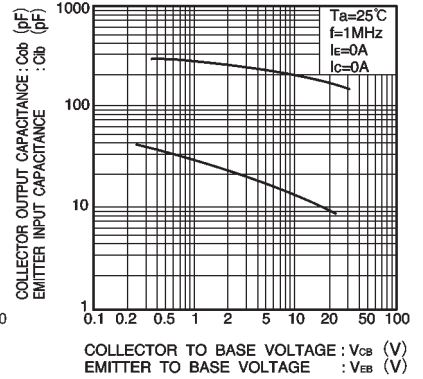


Fig.6 Collector output capacitance vs. collector-base voltage  
Emitter input capacitance vs. emitter-base voltage

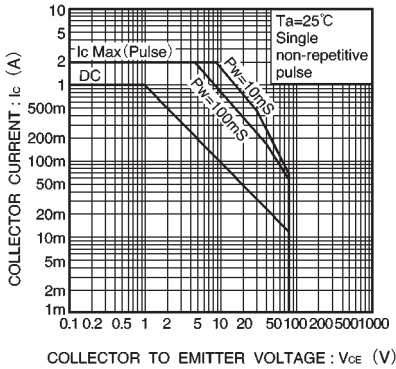


Fig.7 Safe operating area (2SD1863)

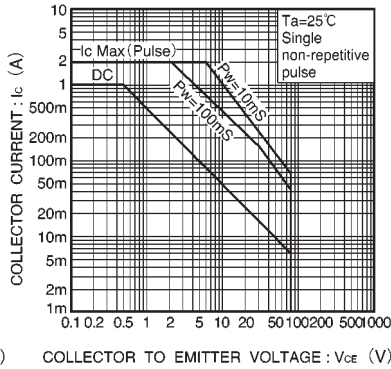


Fig.8 Safe operating area (2SD1898)

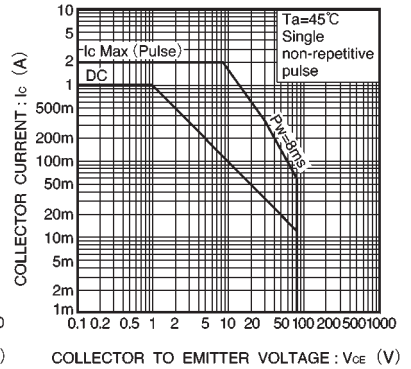


Fig.9 Safe operating area (2SD1381F)