

**Silicon NPN Power Transistor**


**BDY53**

**DESCRIPTION**

- Collector-Emitter Sustaining Voltage-  
 :  $V_{CE0(SUS)}=60V(\text{Min.})$
- Collector-Emitter Saturation Voltage-  
 :  $V_{CE(sat)}= 1.1 V(\text{Max})@ I_C = 4A$
- High Switching Speed



**APPLICATIONS**

- Designed for general-purpose switching and amplifier applications

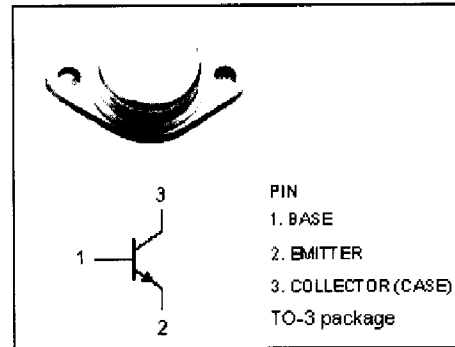

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	100	V
$V_{CEO}$	Collector-Emitter Voltage	60	V
$V_{EBO}$	Emitter-Base Voltage	7	V
$I_C$	Collector Current-Continuous	12	A
$I_B$	Base Current	5	A
$P_C$	Collector Power Dissipation@ $T_C=25^\circ\text{C}$	60	W
$T_J$	Junction Temperature	200	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-65~200	$^\circ\text{C}$

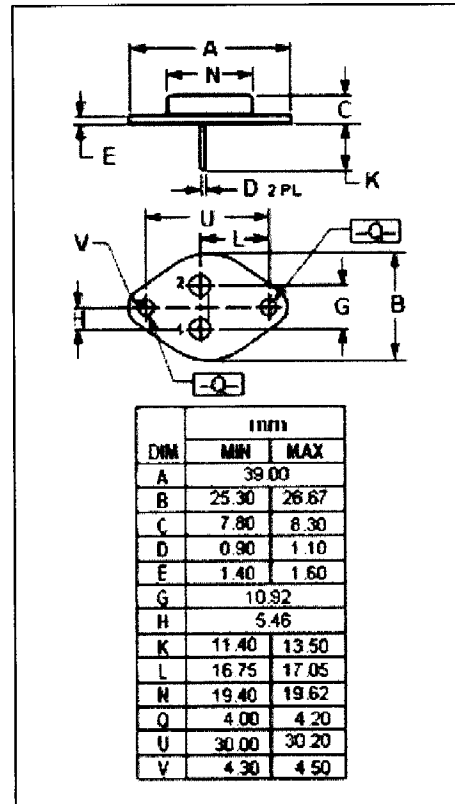

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

## Silicon NPN Power Transistors

## BDY53

### ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100\text{mA}; I_B=0$	60			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=4\text{A}; I_B=0.4\text{A}$			1.1	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=7\text{A}; I_B=1.4\text{A}$			2.2	V
$V_{BE(sat)-1}$	Base-Emitter Saturation Voltage	$I_C=4\text{A}; I_B=0.4\text{A}$			2.0	V
$V_{BE(sat)-2}$	Base-Emitter Saturation Voltage	$I_C=7\text{A}; I_B=1.4\text{A}$			2.5	V
$I_{CEX}$	Collector Cutoff Current	$V_{CE}=100\text{V}; V_{BE}=-1.5\text{V}; T_C=150^\circ\text{C}$			15	mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=7\text{V}; I_C=0$			3.0	mA
$h_{FE}$	DC Current Gain	$I_C=2\text{A}; V_{CE}=1.5\text{V}$	20			
$f_T$	Current Gain-Bandwidth Product	$I_C=0.5\text{A}; V_{CE}=4\text{V}; f=10\text{MHz}$	20			MHz

### Switching Times

$t_{on}$	Turn-On Time	$I_C=5\text{A}; I_B=1\text{A}$		0.3		$\mu\text{s}$
$t_{off}$	Turn-Off Time	$I_C=5\text{A}; I_{B1}=1\text{A}; I_{B2}=-0.5\text{A}$		1.8		$\mu\text{s}$