


Circuit Diagram

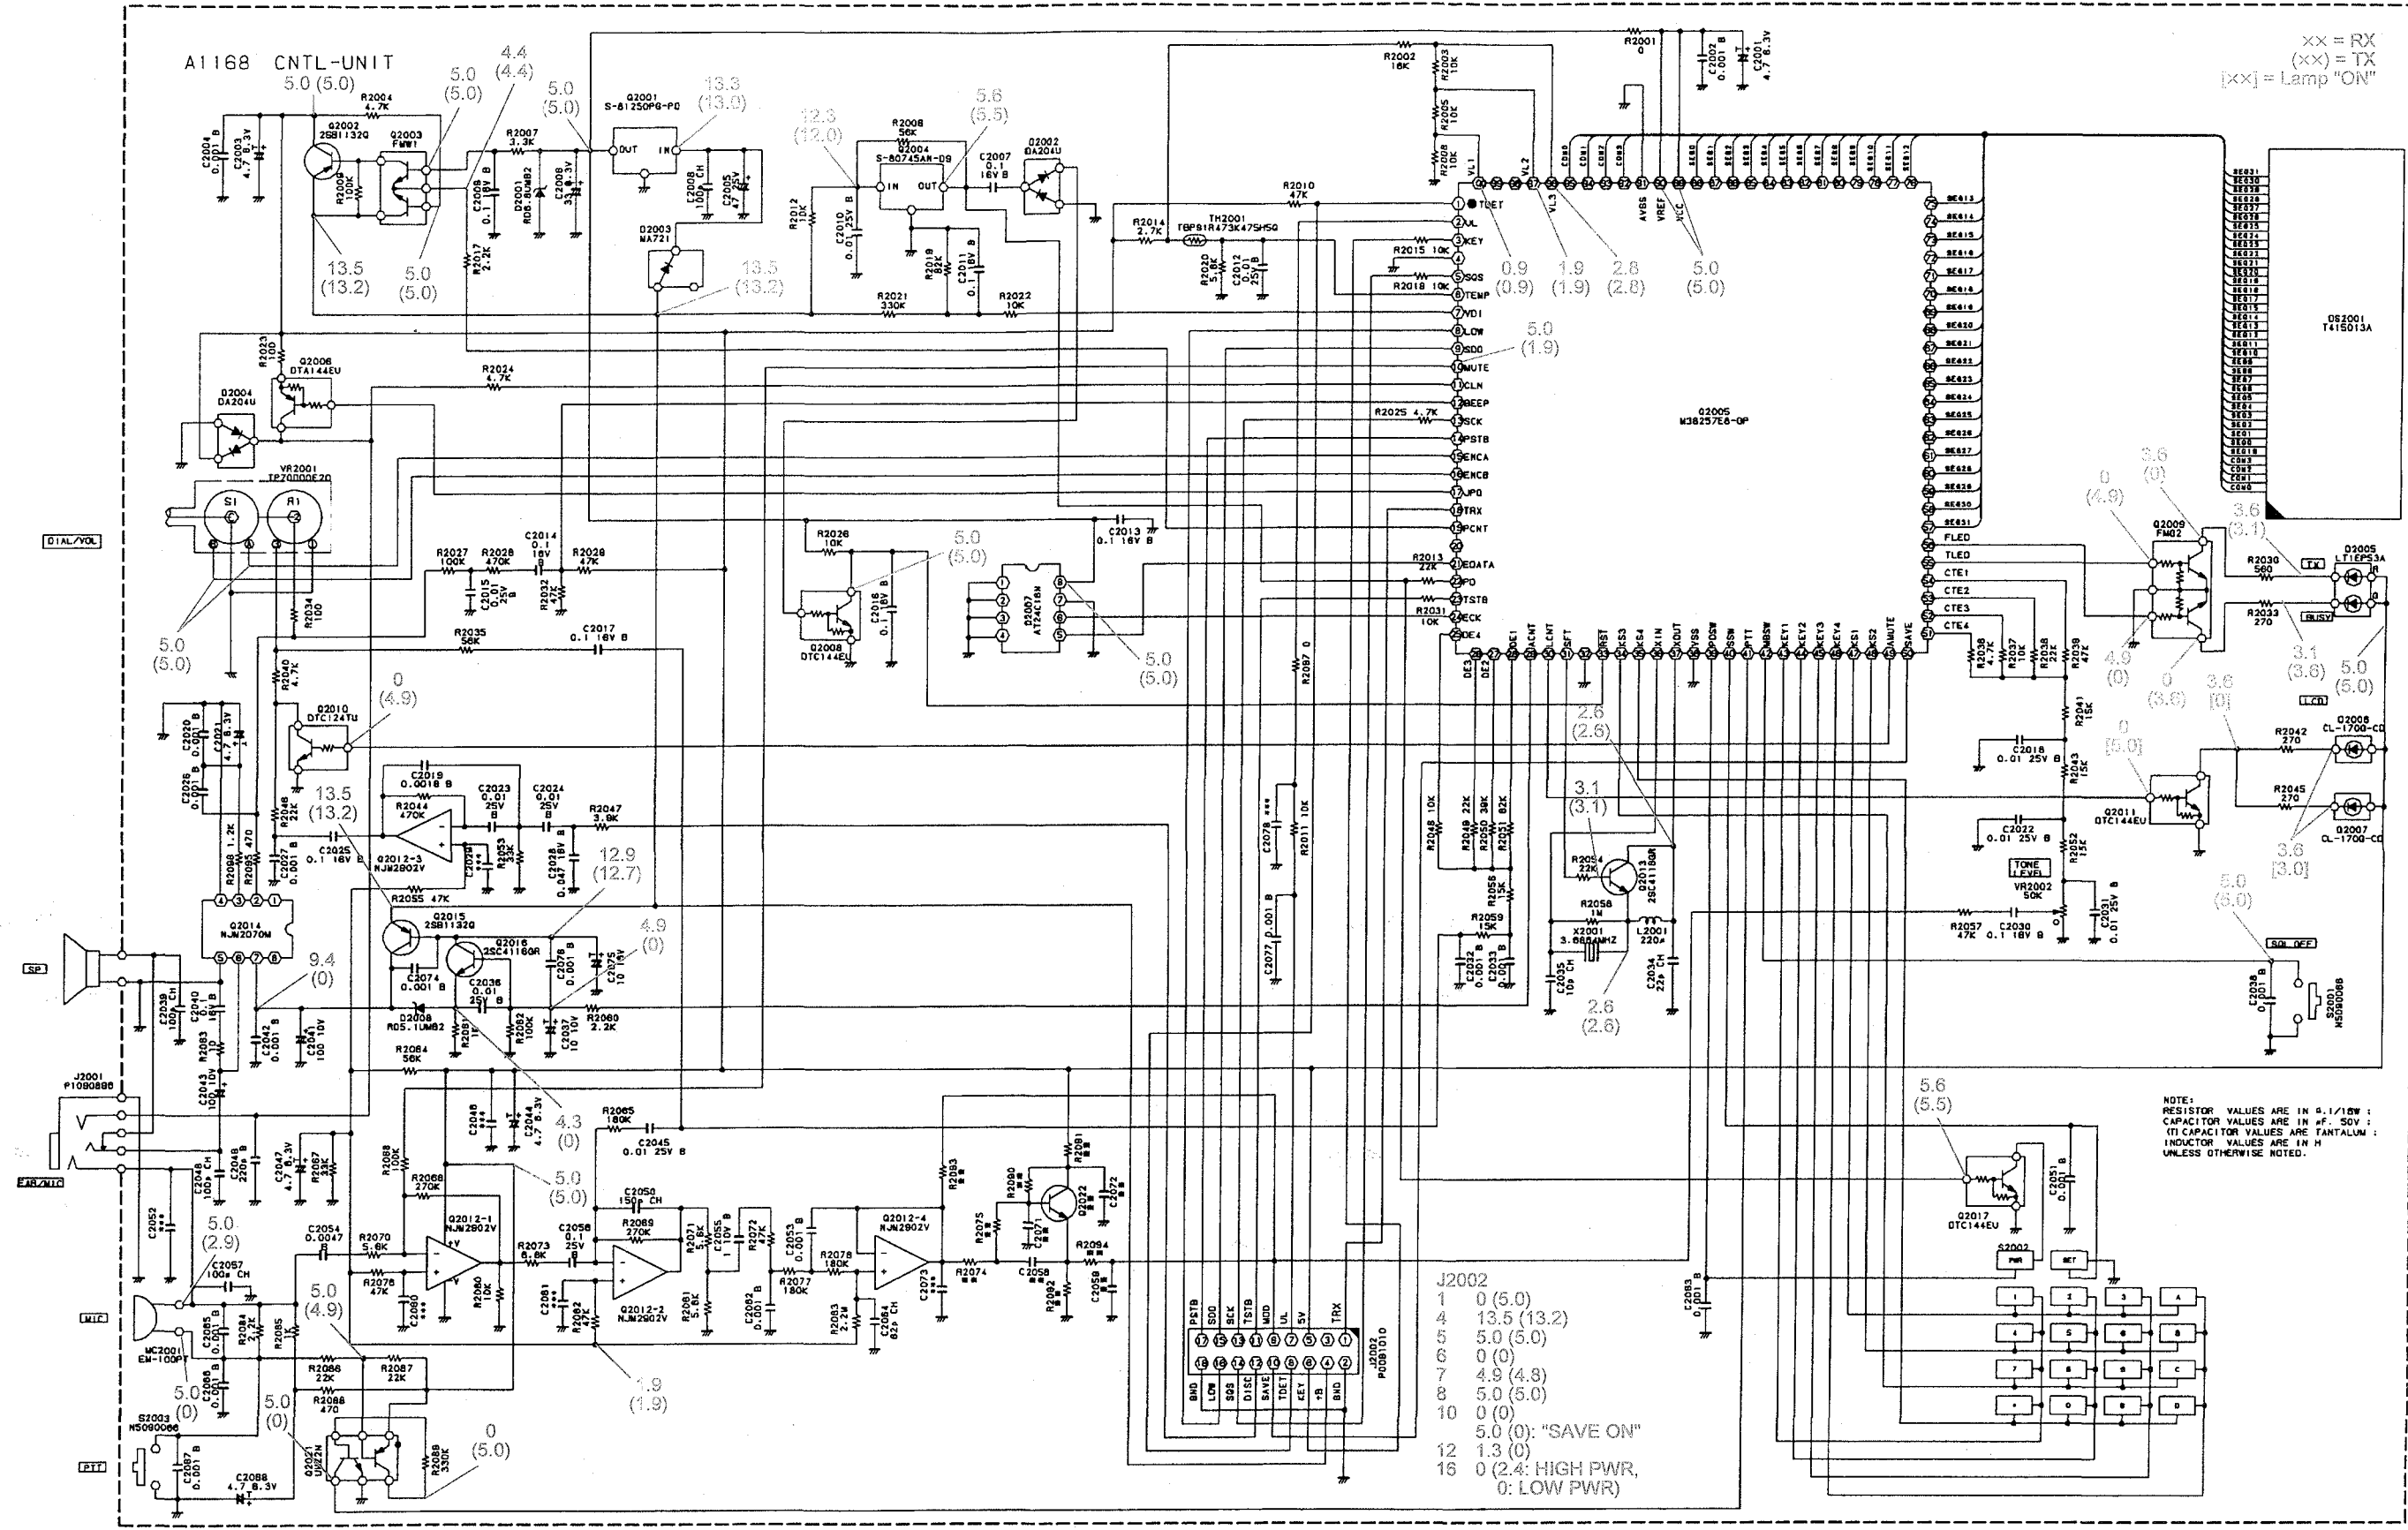

xx = RX  
 (xx) = TX  
 [xx] = Lamp "ON"

NOTE:  
 RESISTOR VALUES ARE IN Ω, 1/10W;  
 CAPACITOR VALUES ARE IN μF, 50V;  
 (T) CAPACITOR VALUES ARE TANTALUM;  
 INDUCTOR VALUES ARE IN H  
 UNLESS OTHERWISE NOTED.

- J2002
- 1 0 (5.0)
  - 4 13.5 (13.2)
  - 5 5.0 (5.0)
  - 6 0 (0)
  - 7 4.9 (4.8)
  - 8 5.0 (5.0)
  - 10 0 (0)
  - 12 5.0 (0): "SAVE ON"
  - 13 1.3 (0)
  - 16 0 (2.4: HIGH PWR,  
0: LOW PWR)

SEP 12.5	C2058	C2059	C2071	C2072	R2074	R2075	R2090	R2091	R2092	R2093	R2094	Q2022
SEP 25	0.001μ	***	150μ	0.1μ	180K	180K	***	2.2K	10K		22K	2SC4118

Circuit Diagram

