


SCHEMATIC DIAG

OPTION	OPEN	SHORT
A DIAL SPEED	10 PPS	20 PPS
B % Break	61%	67%
C	(C) (D)	
D FLASH	1 1	700 ms
	1 0	450 ms
	0 1	90 ms
F TEST	DUAL TONE	SINGL TONE

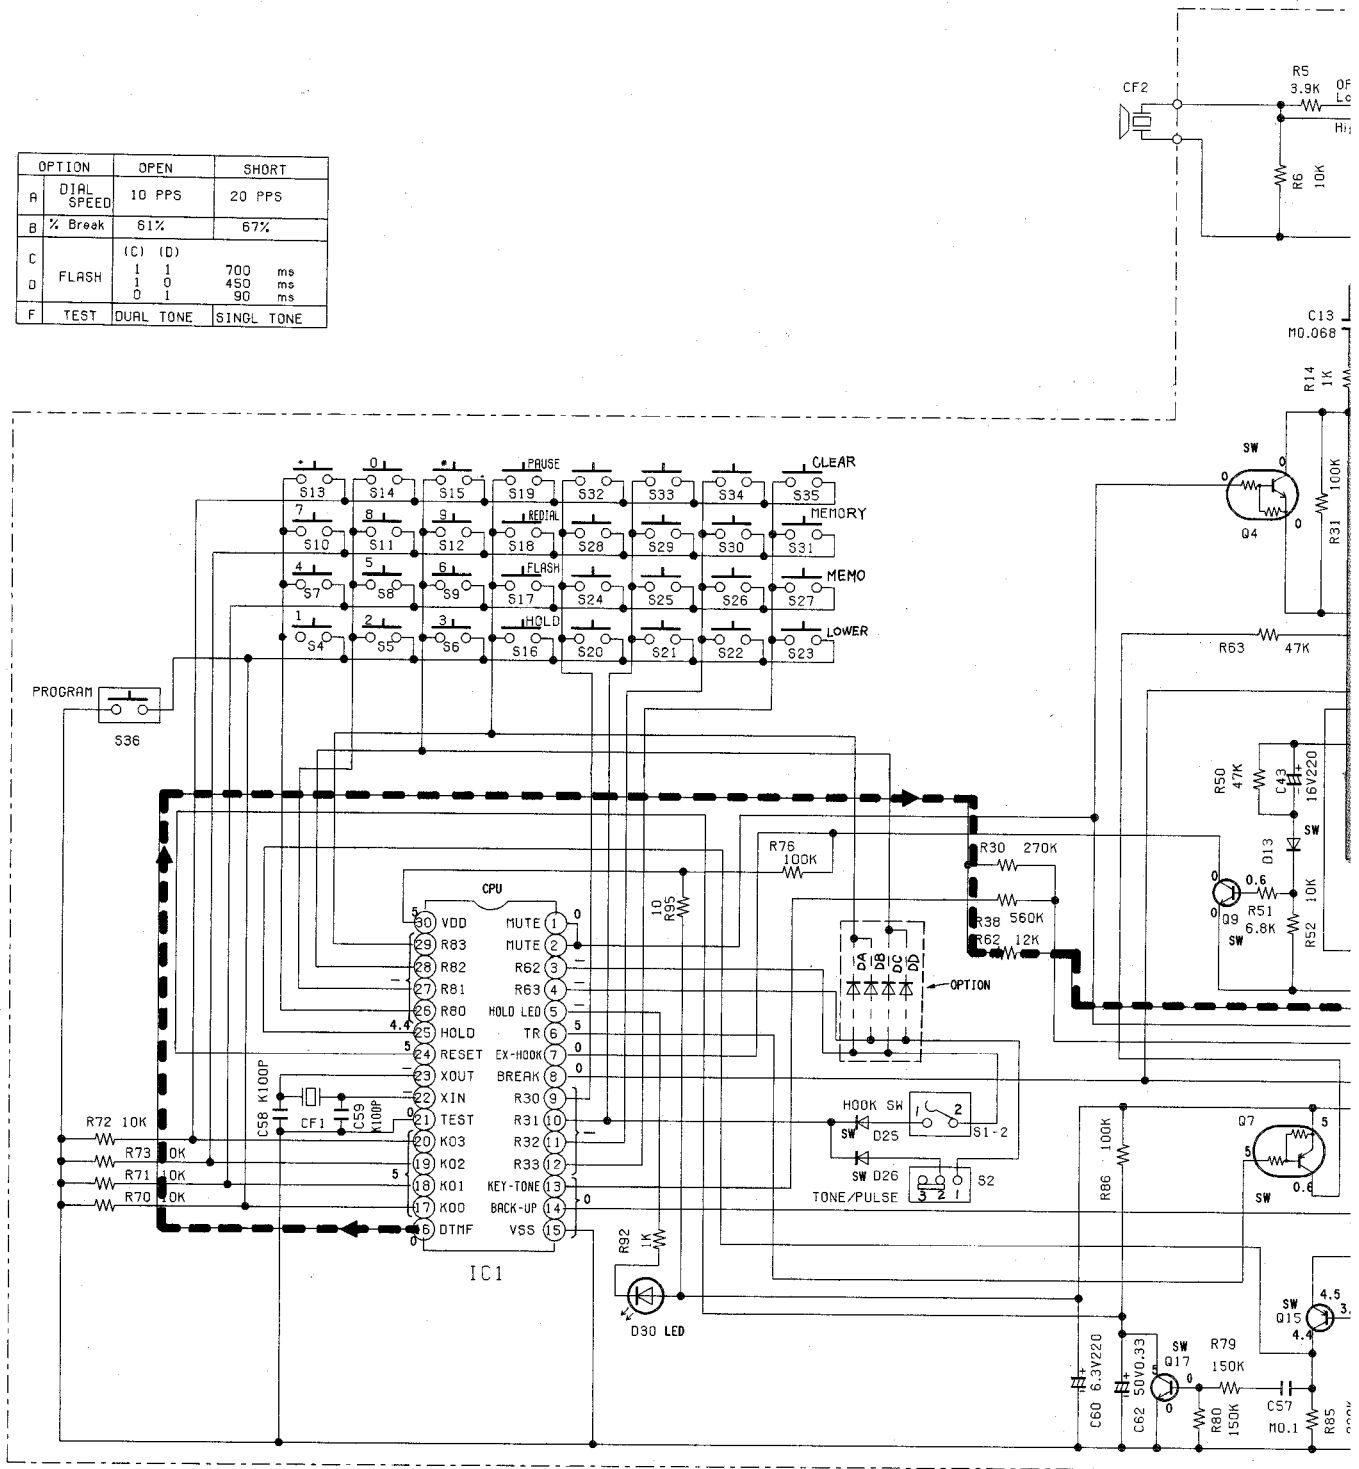


Notes:

1. SW1-1: Hook switch in "ON-HOOK" position.
2. SW1-2: Hook switch in "ON-HOOK" position.
3. SW2: Tone/Pulse selector switch in "TONE" position.
4. SW3: Ringer Switch in "HIGH" position.

5. DC voltage measurements are taken with electronic voltmeter from negative terminal of battery.
(Add 40 mA to telephone line from the loop simulator.)

6. This schematic diagram may be modified at any time with the development of new technology.



ATIC DIAGRAM

7


8

9

10

11

12

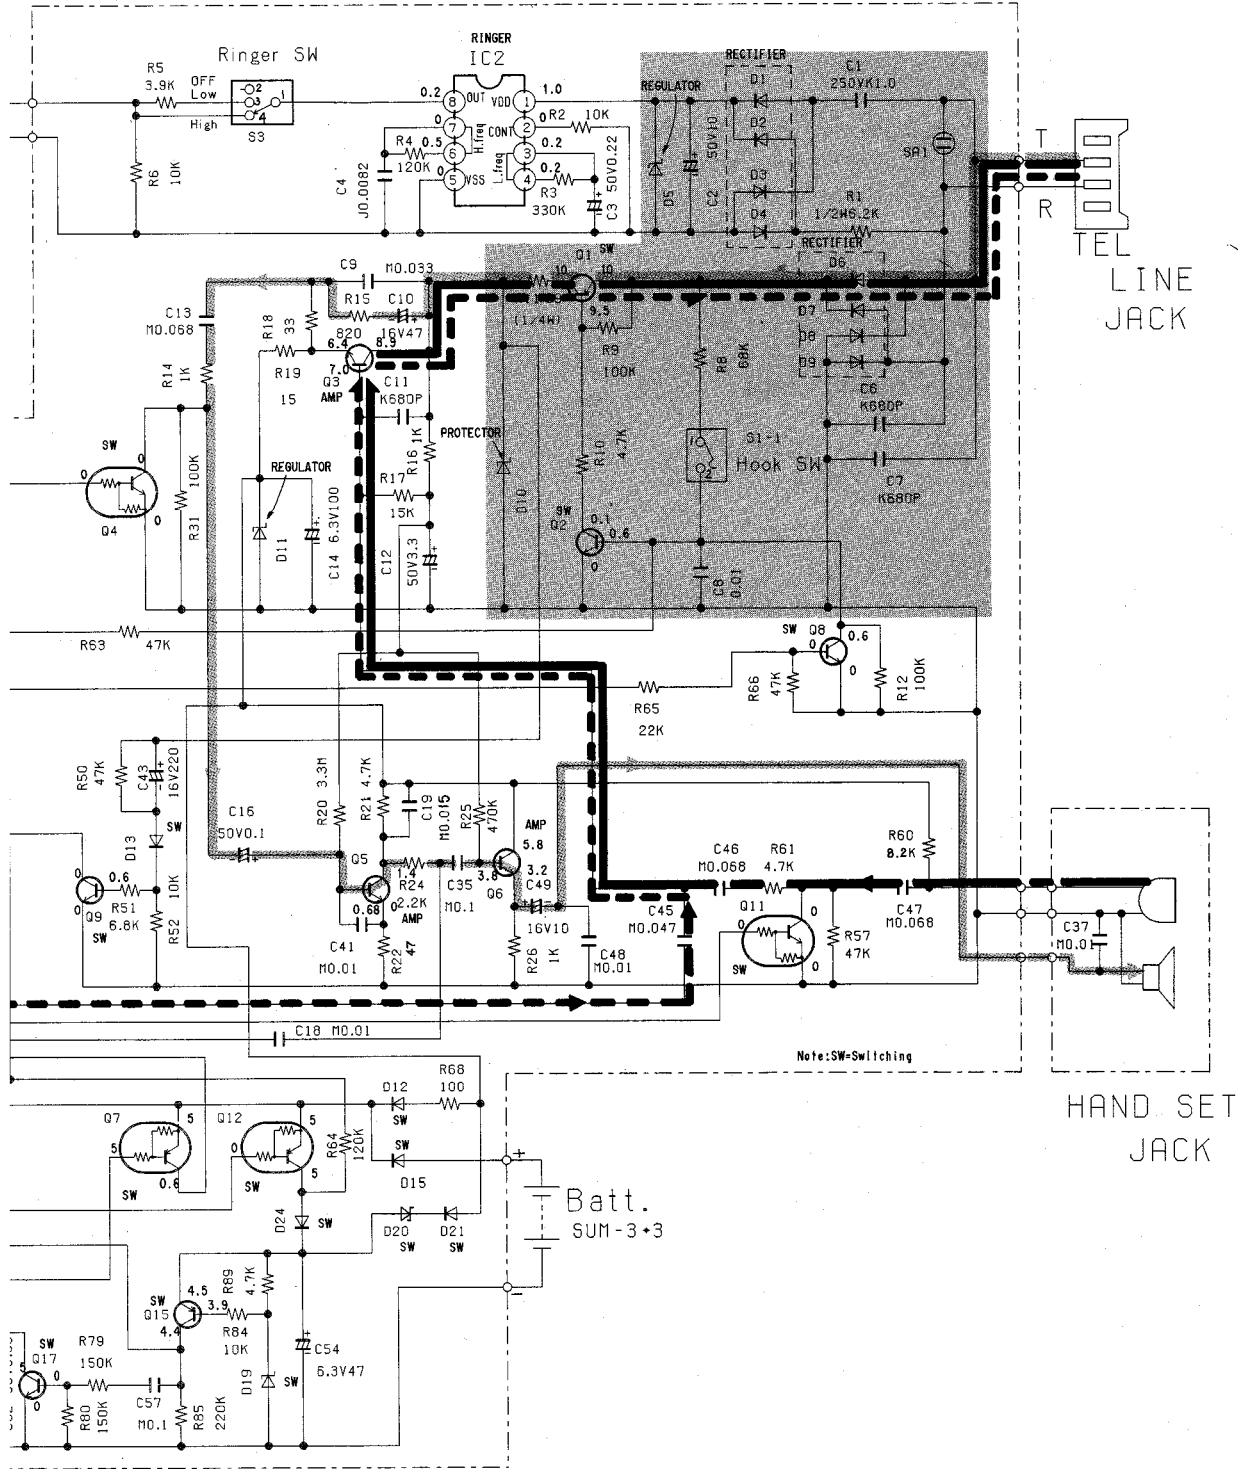

- ← Handset Incoming Signal
- ◀ DTMF Signal
- Handset Outgoing Signal

ic voltmeter

7.

Important safety notice

The shaded area on this schematic diagram incorporates special features important for protection from fire and electrical shock hazards. When servicing it is essential that only manufacturer's specified parts be used for the critical components in the shaded areas of the schematic.

or.)

/ time with

