Energizer
1-800-383-7323 USA/CAN
www.energizer.com

ENERGIZER 3-350NNCI

Industry Standard Dimensions

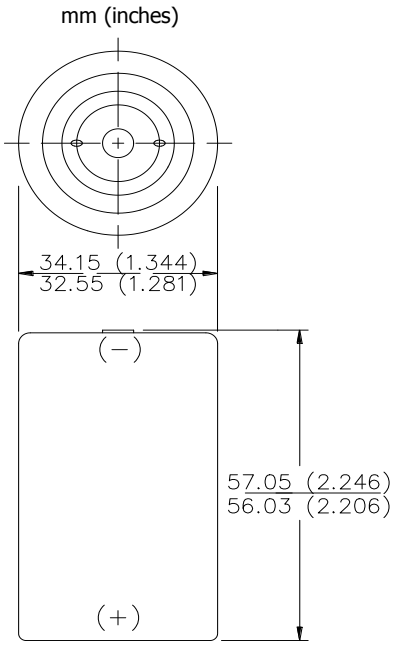

Specifications

NOT INTENDED FOR RETAIL DISTRIBUTION

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO_2) No added mercury or cadmium
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	143.8 grams (5.1 oz.)
Typical Volume:	52.6 cubic centimeters (3.2 cubic inch)
Cell:	One No. 3-350 (size 'D')
Jacket:	Plastic Label
Shelf Life:	7 years at 21°C
Terminal:	Flat Contact / No Positive or Negative Cover

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

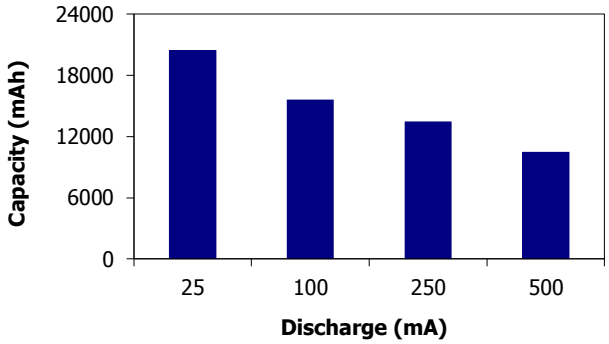

Constant Resistance Performance

Typical Characteristics (21°C)

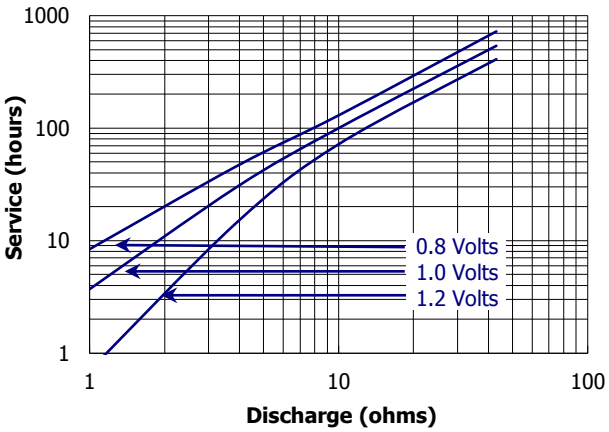

Constant Current Performance

Typical Characteristics (21°C)

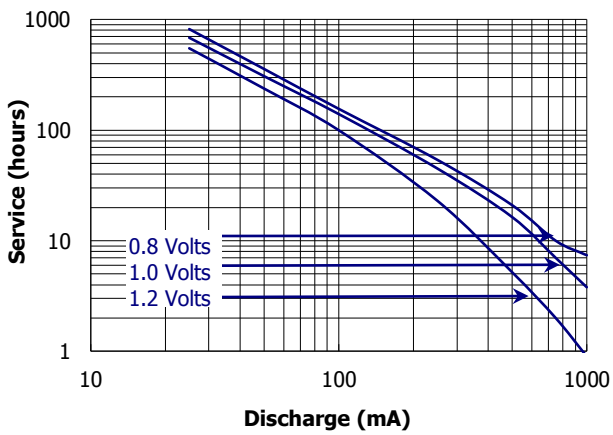

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

1-800-383-7323 USA/CAN
www.energizer.com

ENERGIZER 3-350NNCI

Industry Standard Tests (21°C)

RADIO
10 ohm 4 hrs/day

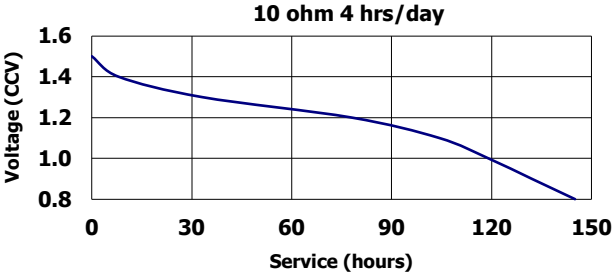

LIGHTING
1.5 ohm HIF
LIGHTING
2.2 ohm LIF

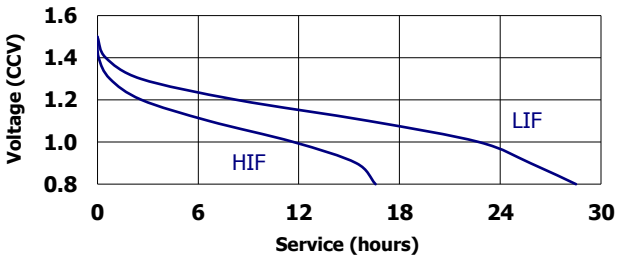

TOY
2.2 ohm 1 hr/day

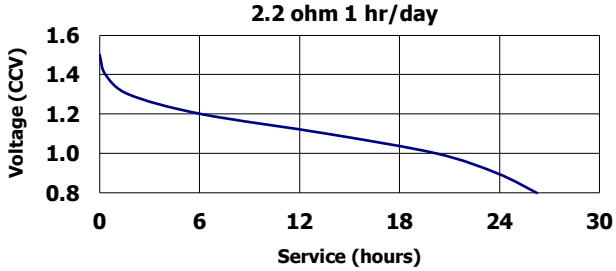

PORTABLE STEREO
600 mA 2 hrs/day

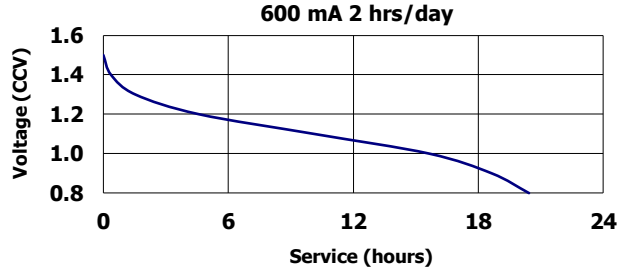

Important Notice
This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.