1-800-383-7323 USA/CAN
www.energizer.com

# ENERGIZER 371/370

ZERO MERCURY®

**SILVER OXIDE**

## Specifications

| | |
|---|---|
| **Chemical System:** | Silver Oxide ($Zn/Ag_2O$) |
| **Designation:** | IEC-SR69 |
| **Nominal Voltage:** | 1.55 Volts |
| **Typical Capacity:** | 34 mAh* (to 1.2 volts) |
| **Capacity Test:** | 33K ohm continuous drain at 21°C |
| **Typical Weight:** | 0.7 grams (0.023 oz.) |
| **Typical Volume:** | 0.15 cubic centimeters (0.009 cubic inch) |
| **Impedance (40 Hz):** | 10 to 20 ohms |

* Varies according to the applied load, temperature, and cutoff voltage.

## Industry Standard Dimensions

mm (inches)

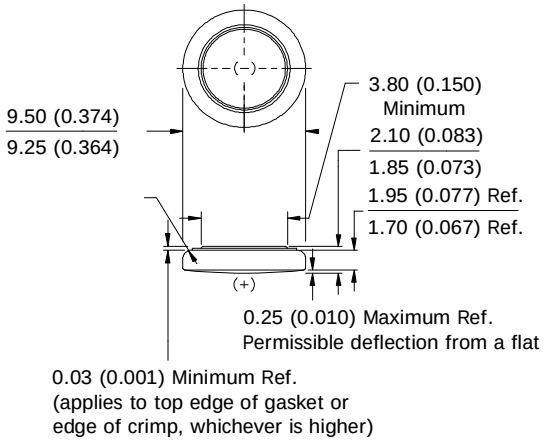


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN
HIGH PULSE ON DEMAND

## Cross Section

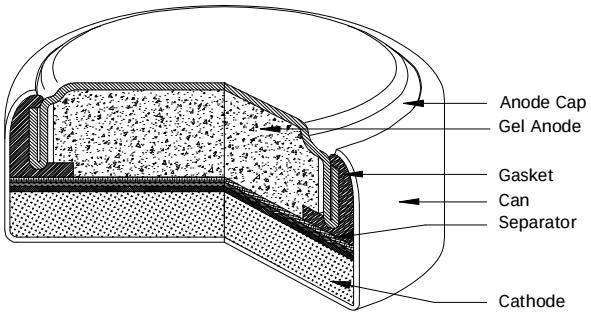


## Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

**Schedule:** Continuous
**Typical Drain @1.53V:**
0.046 milliamperes
**Load:** 33K ohm

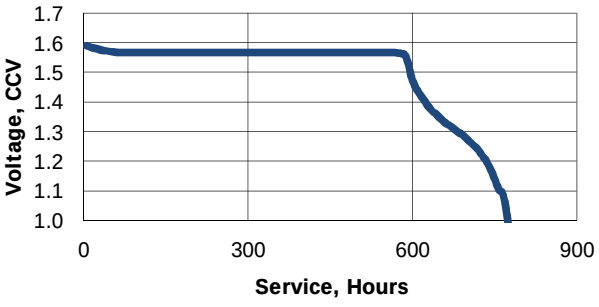


| Schedule | Typical Drains at 1.53V (milliamperes) | Load (ohm) | Cutoff 1.2V (hours) |
|---|---|---|---|
| Continuous | 0.046 | 33K | 734 |

## Temperature Characteristics

Typical Performance at Low Discharge Rates

### Service Effects

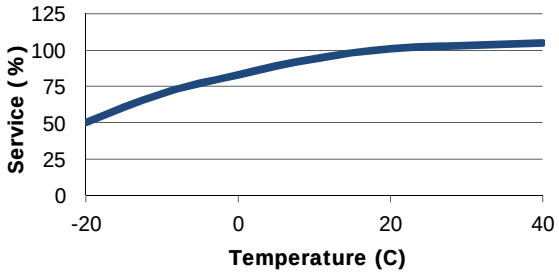


### Storage Effects

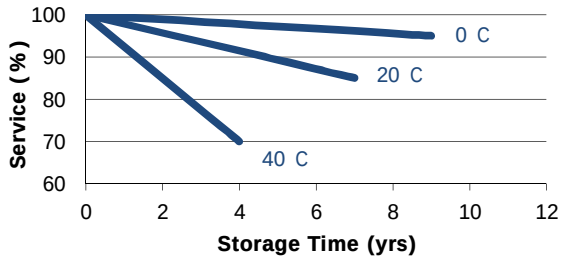


## Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

**©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.**