Panasonic Batteries

CR-2/3AZ
LITHIUM MANGANESE DIOXIDE

Features & Benefits

- Superior long term reliability
- High current pulse discharge capability
- Wide operating temperature (-40°C to 70°C)
- High safety and energy density

Specifications

Capacity:	1600 mAh Typical
Nominal Voltage:	3V
Weight:	Approximately 17g

Dimensions

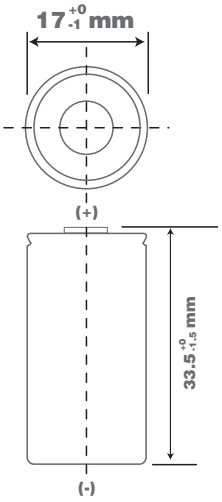

Pulse Discharge Characteristics

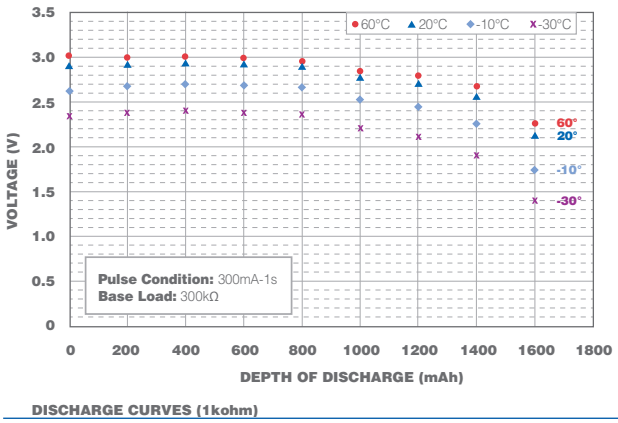

DISCHARGE CURVES (1kohm)

Long Term Discharge 100kΩ (without wake-up pulse)

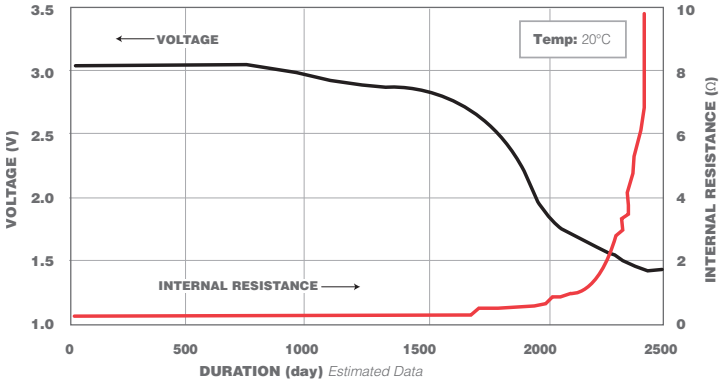

Discharge Curves (1kohm)

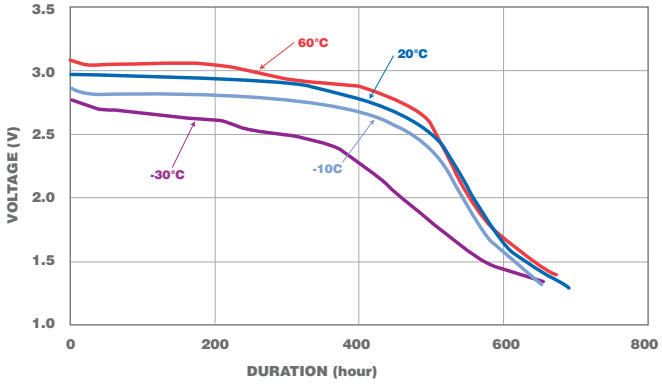

Long Term Discharge 300kΩ (without wake-up pulse)

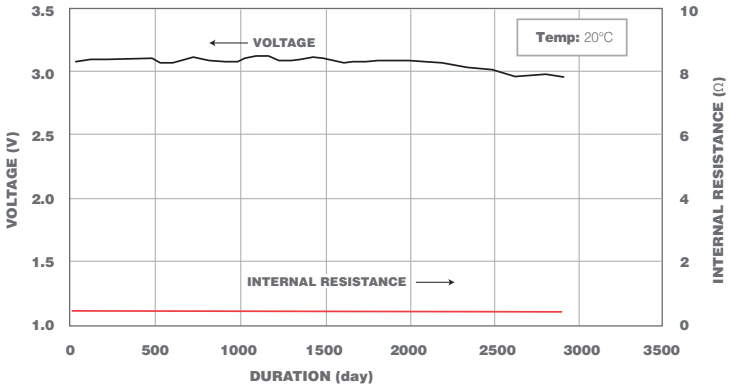

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.

LITHIUMION/CR-2/3AZ/4.11V1 | Copyright © 2011 Panasonic Corporation of America. All Rights Reserved.

Panasonic ideas for life

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit **www.panasonic.com/industrial/batteries-oem** or e-mail **oembatteries@us.panasonic.com**