

Film Dielectric Trimmers

TEST VOLTAGE (DC) FOR 1 MINUTE:

400 V

MAXIMUM CONTACT RESISTANCE:5 m Ω **MINIMUM INSULATION RESISTANCE BETWEEN STATOR AND ROTOR:**10 000 M Ω **CATEGORY TEMPERATURE RANGE:**

- 40 to + 125 °C

CLIMATIC CATEGORY (IEC 60068):

40/125/21

MINIMUM STORAGE TEMPERATURE:

- 55 °C

RELATED SPECIFICATION:

IEC 60418-1 and 4

EFFECTIVE ANGLE OF ROTATION:

180° (rotation in 180° only, see "Life of Trimmer")

OPERATING TORQUE:

1.5 to 25 mNm

MAXIMUM AXIAL THRUST:

2 N

FEATURES

- High temperature type
- Housing dimensions:
11 mm x 14 mm x 9 mm
- For a basic grid of 2.54 mm
- Top adjustment
- Vertical version

**APPLICATIONS**

- For fine adjustment in professional applications

DESCRIPTION:

The trimmers consist of a glass reinforced polysulphone frame with a polysulphone dust cover, brass rotor and stator with PTFE or polycarbonate film as the dielectric. The stator plates are stacked on pins and separated by rings, so that it is possible to produce a single stator or a differential type.

The rotor contact surfaces are plated to ensure a long life and a stable contact even under severe climatic conditions.

QUALITY LEVEL:

Sampling and data evaluation for quality level in accordance with "MIL-STD-105D" and "IEC 60410":

- < 0.15 % major defects
- < 0.65 % minor defects

Each capacitor is tested for minimum C_{\min} and is also subjected to the full test voltage.

 C_{\min}/C_{\max} :**SINGLE STATOR TYPE**

2.5/20 to 7/100 pF

DIFFERENTIAL TYPE


2/12 to 7/150 pF

RATED VOLTAGE (DC):

200 V

LIFE OF TRIMMER:

Maximum 10 cycles: rotation in 180° only (the electrical and mechanical performance is not guaranteed if rotated beyond 10 cycles)

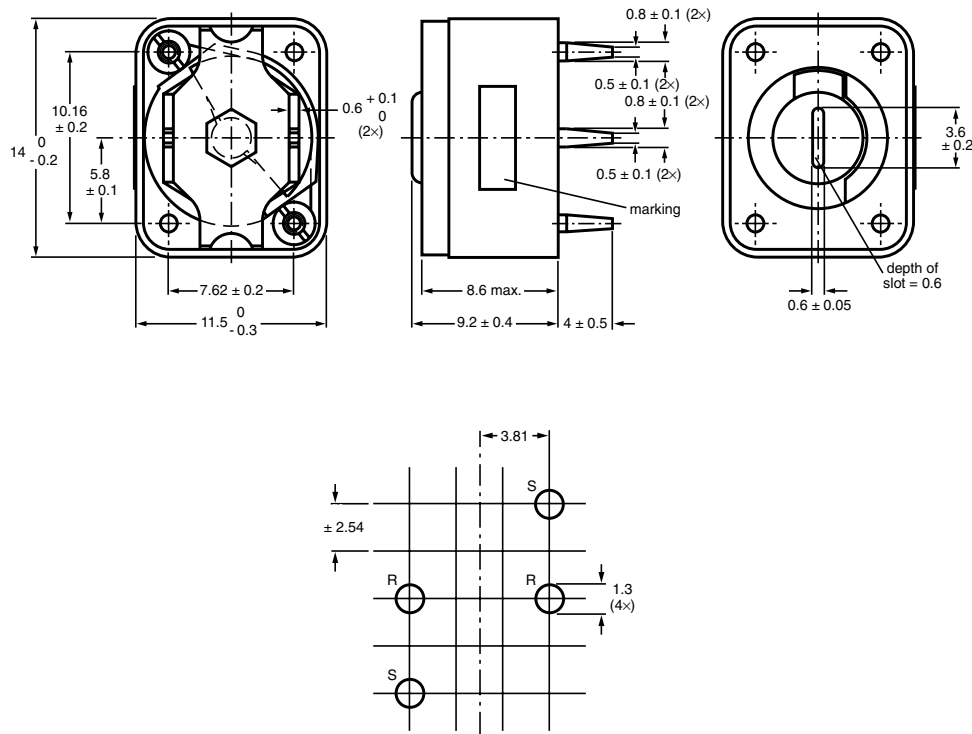

R = rotor, S = stator

Trimmers BFC2 809 07... series

Dimensions in millimeters

ADJUSTMENT:

The trimmers can be adjusted with a screwdriver or trimming key. Capacitance increase is obtained with clockwise rotation

MARKING:

The trimmers are marked with the capacitance value in pF, followed by the letter 'E' (single-stator type) or the letter 'D' (differential type).

MOUNTING:

The trimmer can be mounted on printed-circuit boards with a grid of 2.54 mm and a minimum hole diameter of 1.25 mm.

PACKAGING:

Blister packs of 70 units each. For smallest packaging quantity (SPQ) see Electrical Data Table.

ORDERING INFORMATION

C _{min} /C _{max} (pF)	CATALOG NUMBER BFC2 809 07...	
	TOP AND BOTTOM ADJUSTMENT	
	SINGLE STATOR TYPE	DIFFERENTIAL TYPE
2/12	-	018
2.5/20	004	006
4/40	008	009
5/60	011	012
6/80	013	014
7/100	015	016
7/150	-	107

ELECTRICAL DATA

GUARANTEED MAX. C_{min} / MIN. C_{max} AT 200 kHz (pF)	TYPE	DIEL.	TAN δ AT $C_{max} \times 10^{-4}$		TEMP. COEFF. ³⁾ ($10^{-6}/K$)	SPQ	CATALOG NUMBER BFC2
			1 MHz	100 MHz			
2/12	differential	PTFE ¹⁾	≤ 10	≤ 17	0 ± 200	350 809 07018
2.5/20	single stator	PTFE	≤ 10	≤ 17	0 ± 200	350 809 07004
	differential					350 809 07006
4/40	single stator	PTFE	≤ 10	≤ 17	0 ± 200	350 809 07008
	differential					350 809 07009
5/60	single stator	PTFE	≤ 10	≤ 25	0 ± 200	350 809 07011
	differential					350 809 07012
6/80	single stator	PTFE	≤ 10	≤ 25	0 ± 200	350 809 07013
	differential					350 809 07014
7/100	single stator	PTFE	≤ 10	≤ 25	0 ± 200	350 809 07015
	differential					350 809 07016
7/150	differential	PC ²⁾	≤ 50	-	0 ± 200	350 809 07107

Notes:

1. PTFE = polytetrafluorethylene
2. PC = polycarbonate
3. C: 60 % to 80 % of C_{max} ; T_{amb} : from + 20 °C to + 125 °C

TEST PROCEDURES AND REQUIREMENTS

IEC 60418-1 CLAUSE	IEC 60068 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.2		method of mounting	method A	
14		capacitance drift	after TC measurement	$\Delta C/C: \leq 1 \%$
19		thrust	axial thrust of 2 N	$\Delta C/C: \leq 0.3 \%$
21 21.1 21.2	Ua Ub	robustness of terminations: tensile bending	1 N	no damage bending not allowed
22	Na	rapid change of temperature	1 cycle; 0.5 hours at lower and 0.5 hours at upper category temperature	$\Delta C/C: \leq 1 \%$
23	T Ta	soldering: solderability	solder bath immersion 3 mm; 235 °C; 2 s	good wetting no mechanical damage
	Tb	resistance to heat	solder bath: 260 °C; 10 s	no mechanical damage
24	Eb	impact bump	4000 \pm 10 bumps; 40 g; 6 ms	$\Delta C/C: \leq 0.2 \%$; no mechanical damage
25	Fc	vibration	frequency 10 to 55 Hz; amplitude 0.35 mm; 1.5 hours	$\Delta C/C: \leq 0.25 \%$; no mechanical damage

IEC 60418-1 CLAUSE	IEC 60068 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
26 26.1	B	climatic sequence: dry heat	16 hours at upper category temperature	$\Delta C/C: \leq 3$ $\tan \delta: \leq 10 \times 10^{-4}$ $R_{ins}: \geq 10000 \text{ M}\Omega$; rotor contact R: $\leq 10 \text{ m}\Omega$
26.2	D	damp heat accelerated, first cycle	1 cycle; 24 hours; + 40 °C; 95 to 100 % RH	voltage proof: 400 V for 1 minute
26.3	Aa	cold	16 hours; - 40 °C	visual examination: no mechanical damage
26.5		damp heat accelerated, remaining cycles	1 cycle; 24 hours; + 40 °C; 95 to 100 % RH	operating torque: 1.5 to 35 mNm
27	Ca	damp heat steady state	21 days; + 40 °C; 90 to 95 % RH	$\Delta C/C: \leq 3 \%$ $\tan \delta: \leq 10 \times 10^{-4}$ $R_{ins}: \geq 10000 \text{ M}\Omega$; rotor contact R: $\leq 10 \text{ m}\Omega$ voltage proof: 400 V for 1 minute visual examination: no mechanical damage operating torque: 1.5 to 35 mNm
29		mechanical endurance	10 cycles Maximum 10 cycles: rotation in 180° only (the electrical and mechanical performance is not guaranteed if rotated beyond 10 cycles)	$\Delta C/C: \leq 0.3 \%$ $\Delta C/C$ after axial thrust: $\leq 0.3 \%$; rotor contact R: $\leq 10 \text{ m}\Omega$ voltage proof: 400 V for 1 minute visual examination: no mechanical damage operating torque: 1 to 50 mNm



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.