



Surface Mount Multilayer Ceramic Chip Capacitors for Ultra High Q Commodity Applications



FEATURES

- Ultra stable class 1 dielectric
- Ultra High Q and low ESR at high frequency
- Four standard sizes
- High SRF characteristic
- Ultra low capacitance to 0.1 pF
- High precision capacitance tolerance ± 0.05 pF
- Supplied in tape on reel
- Ni-barrier with 100 % tin terminations
- Dry sheet manufacturing technology
- Base Metal Electrode system (BME)
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

APPLICATIONS

- Mobile telecommunication
- WLAN
- RF modules
- Tuner

ELECTRICAL SPECIFICATIONS

Note

- Electrical characteristics at 25 °C, 30 % to 70 % related humidity, unless otherwise specified

Operating Temperature: - 55 °C to + 125 °C

Capacitance Range: 0.1 pF to 100 pF

Voltage Range: 10 V_{DC} to 250 V_{DC}

Temperature Coefficient of Capacitance (TCC):

0 ppm/°C \pm 30 ppm/°C from - 55 °C to + 125 °C
 0201: ≥ 22 pF: 0 ppm/°C \pm 60 ppm/°C from - 55 °C to + 125 °C

Dissipation Factor:

Cap < 30 pF: Q $\geq 400 + 20$ C
 Cap ≥ 30 pF: Q ≥ 1000

Test Conditions for Capacitance and DF Measurement:

Cap. ≤ 1000 pF 1.0 V_{RMS} \pm 0.2 V_{RMS}, 1 MHz \pm 10 %
 Cap. > 1000 pF 1.0 V_{RMS} \pm 0.2 V_{RMS}, 1 kHz \pm 10 %

Aging Rate: 0 % maximum per decade

Insulation Resistance (IR): after 120 s at U_R (DC)
 ≥ 10 G Ω or R x C ≥ 500 Ω x F whichever is less

Dielectric Strength Test:

This is the maximum voltage the capacitors are tested for 1 s to 5 s period and the charge/discharge current does not exceed 50 mA
 ≤ 100 V_{DC}: DWV at 250 % of rated voltage
 250 V_{DC}: DWV at 200 % of rated voltage

| QUICK REFERENCE DATA | | | | |
|----------------------|------|---------------------|-------------|---------|
| DIELECTRIC | CASE | MAXIMUM VOLTAGE (V) | CAPACITANCE | |
| | | | MINIMUM | MAXIMUM |
| Ultra High Q | 0201 | 25 | 0.1 pF | 33 pF |
| | 0402 | 100 | 0.1 pF | 22 pF |
| | 0603 | 250 | 0.3 pF | 47 pF |
| | 0805 | 250 | 0.3 pF | 100 pF |

Note

- Detail ratings see "Selection Chart"

| ORDERING INFORMATION | | | | | | | |
|------------------------------|------------------|--|--|---|--|---|----------------------------------|
| VJ0402 | L | 100 | F | X | A | C | W1BC |
| SIZE CODE | DIELECTRIC | CAPACITANCE | TOLERANCE ⁽¹⁾ | TERMINATION | VOLTAGE | PACKAGING | PROCESS CODE FOR BASIC COMMODITY |
| 0201 0402 0603 0805 | L = Ultra High Q | Expressed in pF two significant digits followed by the number of zeros: 0R3 = 0.3 pF 1R0 = 1.0 pF 150 = 15 pF | Cap. value ≤ 5 pF V = ± 0.05 pF B = ± 0.10 pF C = ± 0.25 pF D = ± 0.50 pF 5 pF > Cap. value < 10 pF B = ± 0.10 pF C = ± 0.25 pF D = ± 0.50 pF Cap. value ≥ 10 pF F = ± 1 % G = ± 2 % J = ± 5 % | X = Ni barrier 100 % tin termination | Q = 10 V X = 25 V A = 50 V B = 100 V P = 250 V | C = 7" reel/ paper tape P = 13" reel/ paper tape | |

Note

- ⁽¹⁾ Details see "Selection Chart"

| DIMENSIONS in inches [millimeters] | | | | | |
|------------------------------------|-------------|------------------------------|------------------------------|--------------|--|
| | SIZE CODE | L | W | T MAX. | MB |
| | 0201 (0603) | 0.024 ± 0.0012 (0.60 ± 0.03) | 0.012 ± 0.0012 (0.30 ± 0.03) | 0.013 (0.33) | 0.006 ± 0.002 (0.15 ± 0.05) |
| | 0402 (1005) | 0.040 ± 0.002 (1.00 ± 0.05) | 0.020 ± 0.002 (0.50 ± 0.05) | 0.022 (0.55) | 0.010 + 0.002/- 0.004 (0.25 + 0.05/- 0.10) |
| | 0603 (1608) | 0.063 ± 0.004 (1.60 ± 0.10) | 0.030 ± 0.004 (0.80 ± 0.10) | 0.035 (0.87) | 0.015 ± 0.006 (0.40 ± 0.15) |
| | 0805 (2012) | 0.080 ± 0.008 (2.00 ± 0.20) | 0.050 ± 0.008 (1.25 ± 0.20) | 0.038 (0.95) | 0.020 ± 0.008 (0.50 ± 0.20) |



| SELECTION CHART | | | | | | | | | | | | |
|-------------------------|--------|--------------|------|--------|-------|--------|-------|-------|--------|-------|-------|-----------|
| DIELECTRIC | | ULTRA HIGH Q | | | | | | | | | | TOLERANCE |
| STYLE | | VJ0201 | | VJ0402 | | VJ0603 | | | VJ0805 | | | |
| SIZE CODE | | 0201 | | 0402 | | 0603 | | | 0805 | | | |
| VOLTAGE V _{DC} | | 10 V | 25 V | 50 V | 100 V | 50 V | 100 V | 250 V | 50 V | 100 V | 250 V | |
| VOLTAGE CODE | | Q | X | A | B | A | B | P | A | B | P | |
| CAP. CODE | CAP. | | | | | | | | | | | |
| 0R1 | 0.1 pF | L | L | N | N | | | | | | | B |
| 0R2 | 0.2 pF | L | L | N | N | | | | | | | V, B |
| 0R3 | 0.3 pF | L | L | N | N | S | S | S | T | T | T | V, B |
| 0R4 | 0.4 pF | L | L | N | N | S | S | S | T | T | T | V, B |
| 0R5 | 0.5 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 0R6 | 0.6 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 0R7 | 0.7 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 0R8 | 0.8 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 0R9 | 0.9 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 1R0 | 1.0 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 1R2 | 1.2 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 1R5 | 1.5 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 1R8 | 1.8 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 2R2 | 2.2 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 2R4 | 2.4 pF | | | | | | | S | | | | V, B, C |
| 2R7 | 2.7 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 3R3 | 3.3 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 3R9 | 3.9 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 4R7 | 4.7 pF | L | L | N | N | S | S | S | T | T | T | V, B, C |
| 5R6 | 5.6 pF | L | L | N | N | S | S | S | T | T | T | B, C, D |
| 6R8 | 6.8 pF | L | L | N | N | S | S | S | T | T | T | B, C, D |
| 8R2 | 8.2pF | L | L | N | N | S | S | S | T | T | T | B, C, D |
| 100 | 10 pF | L | L | N | N | S | S | S | T | T | T | F, G, J |
| 110 | 11 pF | L | L | N | | S | S | S | T | T | T | F, G, J |
| 120 | 12 pF | L | L | N | | S | S | S | T | T | T | F, G, J |
| 130 | 13 pF | L | L | N | | S | S | S | T | T | T | F, G, J |
| 150 | 15 pF | L | L | N | | S | S | S | T | T | T | F, G, J |
| 160 | 16 pF | L | L | N | | S | S | S | T | T | T | F, G, J |
| 180 | 18 pF | L | L | N | | S | S | S | T | T | T | F, G, J |
| 200 | 20 pF | L | | N | | S | S | S | T | T | T | F, G, J |
| 220 | 22 pF | L | | N | | S | S | S | T | T | T | F, G, J |
| 240 | 24 pF | L | | | | S | S | S | T | T | T | F, G, J |
| 270 | 27 pF | L | | | | S | S | S | T | T | T | F, G, J |
| 300 | 30 pF | L | | | | S | S | S | T | T | T | F, G, J |
| 330 | 33 pF | L | | | | S | S | S | T | T | T | F, G, J |
| 360 | 36 pF | | | | | S | S | S | T | T | T | F, G, J |
| 390 | 39 pF | | | | | S | S | S | T | T | T | F, G, J |
| 430 | 43 pF | | | | | S | S | S | T | T | T | F, G, J |
| 470 | 47 pF | | | | | S | S | S | T | T | T | F, G, J |
| 560 | 56 pF | | | | | | | | T | T | T | F, G, J |
| 680 | 68 pF | | | | | | | | T | T | T | F, G, J |
| 820 | 82 pF | | | | | | | | T | T | T | F, G, J |
| 101 | 100 pF | | | | | | | | T | T | T | F, G, J |


Note

- Letters indicate product thickness, see "Packaging Quantities"



| PACKAGING QUANTITIES | | | | |
|------------------------|-------------------|---------------------|-------------|--------------|
| SIZE CODE (inch/mm) | THICKNESS (mm) | THICKNESS SYMBOL | PAPER TAPE | |
| | | | 7" REEL (C) | 13" REEL (P) |
| 0201 (0603) | 0.30 ± 0.03 | L | 15K | - |
| 0402 (1002) | 0.50 ± 0.05 | N | 10K | 50K |
| 0603 (1608) | 0.80 ± 0.07 | S | 4K | 15K |
| 0805 (2012) | 0.85 ± 0.10 | T | 4K | 15K |


PAPER TAPE SPECIFICATION

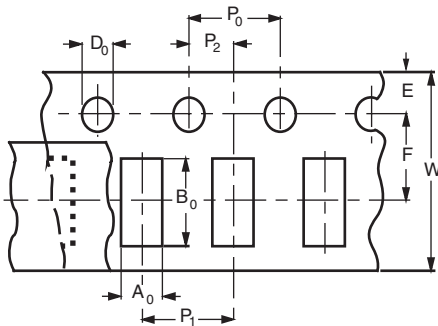

DIMENSIONS OF PAPER TAPE
in millimeters

| SYM. | PRODUCT SIZE CODE | | | |
|-------|-------------------|-------------|-------------|-------------|
| | 0201 | 0402 | 0603 | 0805 |
| A_0 | 0.37 ± 0.03 | 0.62 ± 0.05 | 1.02 ± 0.05 | 1.50 ± 0.10 |
| B_0 | 0.67 ± 0.03 | 1.12 ± 0.05 | 1.82 ± 0.05 | 2.30 ± 0.10 |
| W | 8.00 ± 0.10 | 8.00 ± 0.10 | 8.00 ± 0.10 | 8.00 ± 0.10 |
| E | 1.75 ± 0.05 | 1.75 ± 0.05 | 1.75 ± 0.05 | 1.75 ± 0.05 |
| F | 3.50 ± 0.05 | 3.50 ± 0.05 | 3.50 ± 0.05 | 3.50 ± 0.05 |
| D_0 | 1.55 ± 0.05 | 1.55 ± 0.05 | 1.55 ± 0.05 | 1.55 ± 0.05 |
| P_0 | 4.00 ± 0.10 | 4.00 ± 0.10 | 4.00 ± 0.10 | 4.00 ± 0.10 |
| P_1 | 2.00 ± 0.05 | 2.00 ± 0.05 | 4.00 ± 0.10 | 4.00 ± 0.10 |
| P_2 | 2.00 ± 0.05 | 2.00 ± 0.05 | 2.00 ± 0.05 | 2.00 ± 0.05 |

REEL SPECIFICATIONS

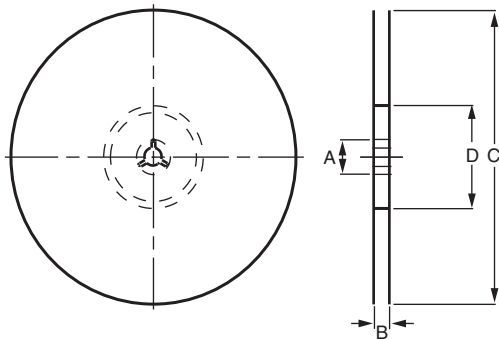


REEL DIMENSIONS AND TAPE WIDTH
in millimeters

| SYM. | Ø 180 mm; 7" | Ø 330 mm; 13" |
|------|--------------|---------------|
| A | 13.0 ± 0.5 | 13.0 ± 0.5 |
| B | 9.0 ± 1.0 | 9.0 ± 1.0 |
| C | 178.0 ± 1.0 | 330.0 ± 1.0 |
| D | 60.0 ± 1.0 | 100.0 ± 1.0 |




ELECTRICAL CHARACTERISTICS


TYPICAL Q VALUE VS. FREQUENCY
SIZE 0402

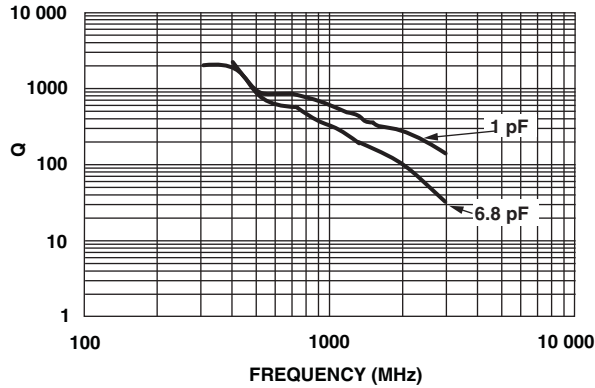


TYPICAL Q VALUE VS. FREQUENCY
SIZE 0603, 250 V

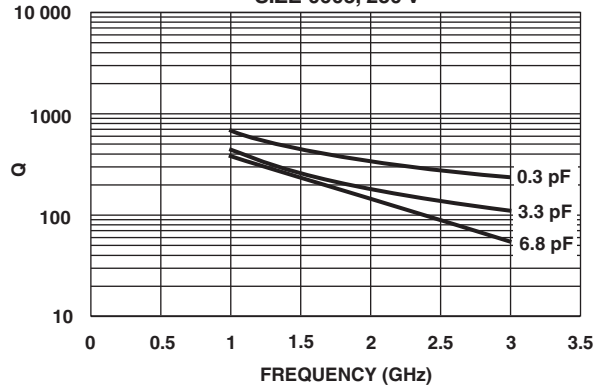


TYPICAL ESR VS. FREQUENCY
SIZE 0402

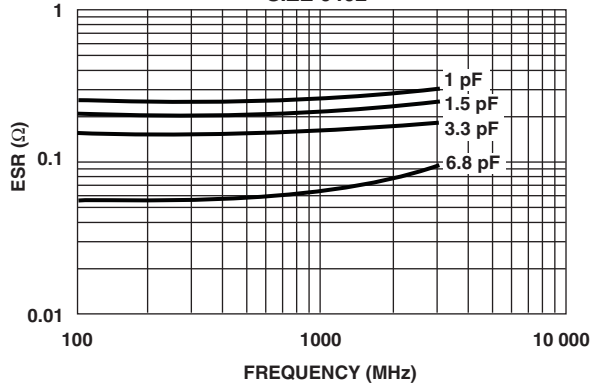


TYPICAL ESR VS. FREQUENCY
SIZE 0603, 250 V

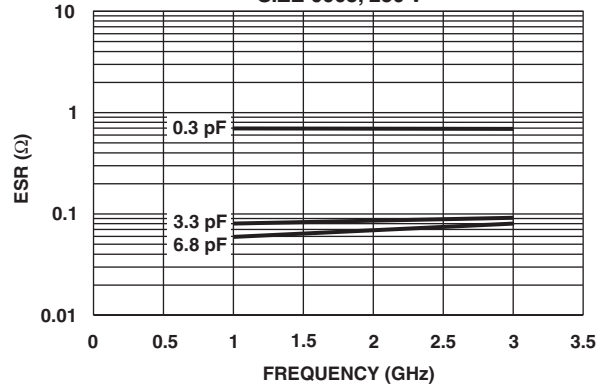

TYPICAL IMPEDANCE VS. FREQUENCY
SIZE 0402

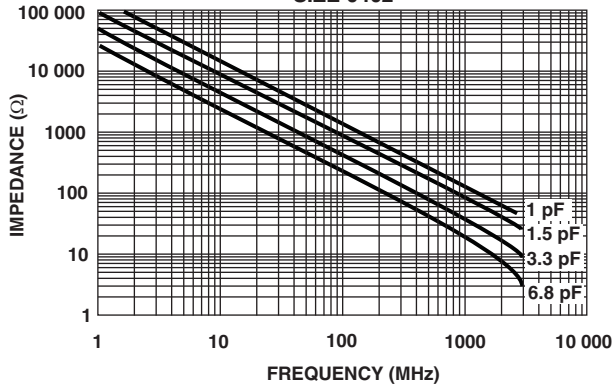

| CONSTRUCTION | | |
|--------------|------------------|--------------------------|
| NO. | NAME | ULTRA HIGH Q |
| 1 | Ceramic material | BaTiO ₃ based |
| 2 | Inner electrode | Cu |
| 3 | Termination | Inner layer |
| 4 | | Middle layer |
| 5 | | Outer layer |
| | | Sn (matt) |

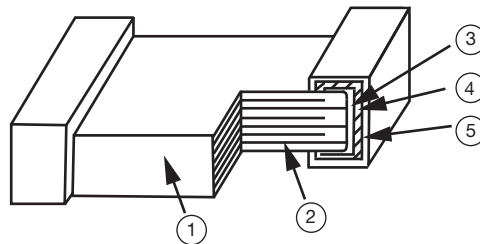

STORAGE AND HANDLING CONDITIONS

- (1) To store products at 5 °C to 40 °C ambient temperature and 20 % to 70 % related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. Do not store products in a corrosive environment such as sulfide, chloride gas, or acid. It may cause oxidization of electrode, which easily be resulted in poor soldering.
- b. To store products on the shelf and avoid exposure to moisture.
- c. Do not expose products to excessive shock, vibration, direct sunlight and so on.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.