

APPLICATIONS:

- White Goods
- Industrial Control



**SHARP's New Line
of MCUs and
System-on-Chips**

LH75400 16/32-bit Microcontroller with Grayscale LCD Controller


FEATURES

- ARM7TDMI™ Core
- High Performance (50 MHz)
 - Internal PLL-driven or External Clock
- 32KB On-chip SRAM
 - 16KB TCM (0 Wait State) SRAM
 - 16 KB Internal SRAM
- Clock and Power Management
 - Low Power Modes: Standby, Sleep, Stop
- Grayscale LCD Controller
 - Up to VGA (640 × 480)
 - 4-bit Video Bus
 - Supports STN Displays
 - 4-bit (16) Gray Shade Support
- Eight Input, 10-bit A/D Converter
- Four DMA Channels
- Integrated Touch Screen Controller
- Serial Interfaces
 - 3 × UARTs
 - SSP
- Full-featured Real Time Clock (RTC)
 - Operates from 32 kHz XTAL
- CAN Version 2.0b*
- Three 16-bit Counter/Timers with Capture/Compare/PWM Capability
- Watchdog Timer
- Low Voltage Detector
- JTAG Debug Interface and Boundary Scan
- 3.3 V Operating Voltage
- -40°C to +85°C Operating Temperature
- 144-pin LQFP Package

DESCRIPTION

The LH75400 is a low cost microcontroller that utilizes the ARM7TDMI core integrated with a wide variety of functions including the capability to control black and white and grayscale LCD displays with up to 16 shades of gray. Other functions include: 32KB of on-chip SRAM, three UARTs, SSP, CAN version 2.0b, three 16-bit Counter/Timers, Analog to Digital Converter with integrated touch screen controller, Watchdog Timer, and Low Voltage Detector. The LH75400 operates up to 50 MHz at 3.3 V over the industrial temperature range of -40°C to +85°C and is offered in a 144-pin LQFP package.

SYSTEM APPLICATION EXAMPLE

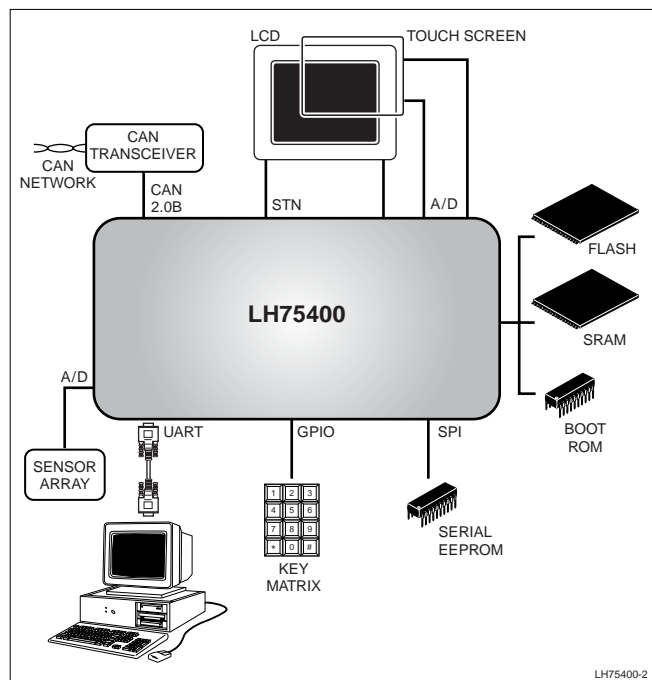


*Controller Area Network (CAN)

PRELIMINARY PRODUCT INFORMATION

SHARP

LH75400 BLOCK DIAGRAM

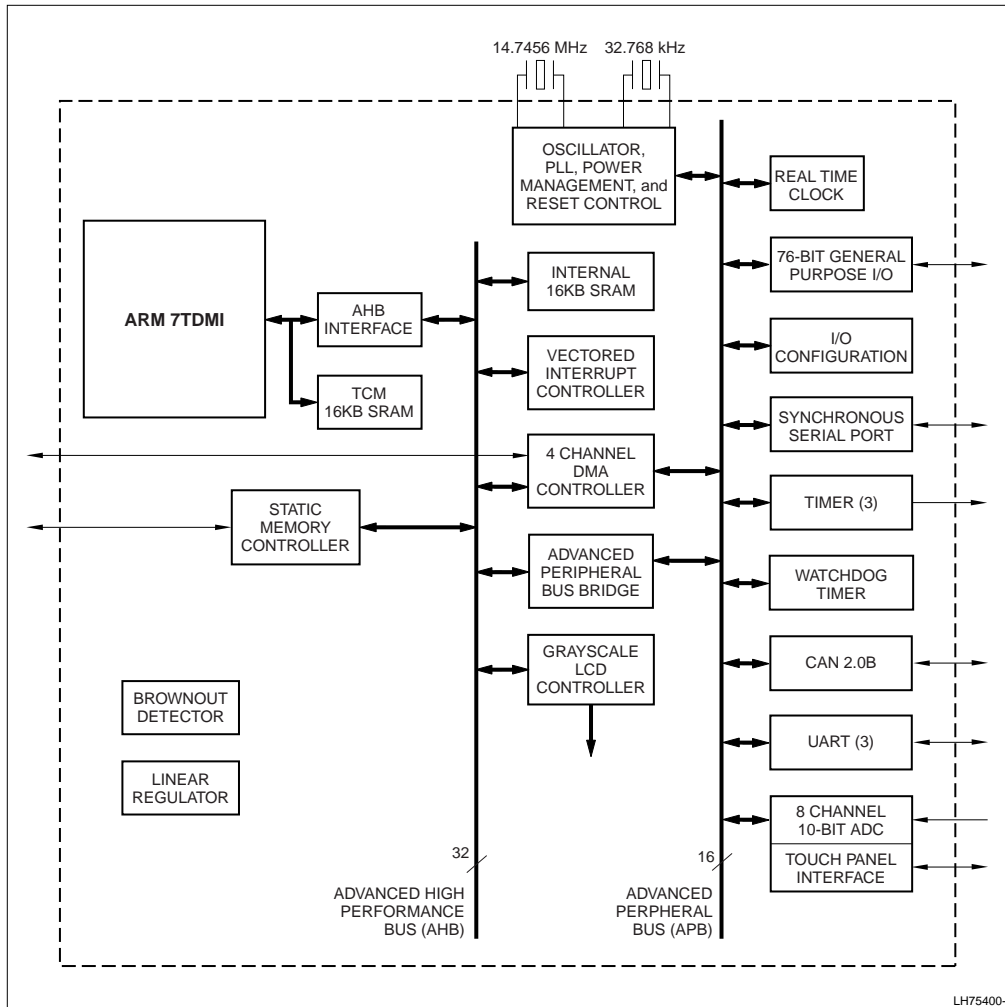

SHARP[®]

MICROELECTRONICS OF THE AMERICAS

Regional Sales Offices

North American Headquarters

Camas, WA
Ph (360) 834-2500
Fax (360) 834-8903

West

Huntington Beach, CA
Ph (714) 903-4600
Fax (714) 903-0295

San Diego, CA
Ph (858) 597-0982
Fax (858) 597-8701

San Jose, CA
Ph (408) 436-4900
Fax (408) 436-0924

East

Boca Raton, FL
Ph (561) 347-8690
Fax (561) 347-8692

Burlington, MA
Ph (781) 270-7979
Fax (781) 229-9117

Carey, NC
Ph (919) 460-0695
Fax (919) 460-0795

New York, NY
Ph (212) 945-9410
Fax (212) 945-9412

Pittsburgh, PA
Ph (412) 381-1191
Fax (412) 381-1192

Central

Schaumburg, IL
Ph (847) 925-9150
Fax (847) 925-9172

Auburn Hills, MI
Ph (248) 391-5404
Fax (248) 391-6165

Austin, TX
Ph (512) 349-7262
Fax (512) 349-7002

DFW Airport, TX
Ph (972) 456-8560
Fax (972) 456-0360

Houston, TX
Ph (281) 955-9909
Fax (281) 955-9910

Muskego, WI
Ph (414) 529-9568
Fax (414) 529-9569

Distributors

All American

San Jose, CA
Ph (408) 441-1300
Fax (408) 437-8970

Arrow Electronics

Westlake Village, CA
Ph (818) 496-7410
Fax (818) 496-5201

Avnet Electronics

Phoenix, AZ
Ph (480) 643-8000
Fax (480) 643-8766

Future Electronics

Canada
Ph (514) 694-7710
Fax (514) 695-3707

Repron Electronics

Tampa, FL
Ph (800) 659-1361
Fax (813) 854-4695

Europe

SHARP Microelectronics
Europe
Hamburg, Germany
Ph (49) 40-2376-2286
Fax (49) 40-2376-2232

Asia

SHARP Corporation
Osaka, Japan
Ph (81) 6-6621-1221
Fax (81) 6117-725300

Product Information: 1-800-642-0261

World Wide Website: <http://www.sharpsma.com>

Specifications are subject to change without notice. Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.