


Pentoda regulacyjna

6AB7

RCA


Wzmacniacz w. i p.cz. kl. A (odb. telewizyjne)

Oktal



$$U_z = 0,3V$$

$$I_z = 0,45A$$



Wartości charakterystyczne i robocze


U_b	300	V
U_s	300	V
U_{s2}	200	V
U_{s1}	-3...-15	V
I_a	12,5	mA
I_{s2}	3,2	mA
K_a	3200	V/V
S_a	5...0,05	mA/V
ρ_a	0,7	M Ω
R_k	190	Ω
R_{s2}	30	k Ω

Wartości maksymalne

U_{amax}	300	V
U_{s2max}	200	V
P_{amax}	3,75	W
P_{s2max}	0,7	W

Pojemności

$C_{s/a}$	0,015	pF
-----------	-------	----

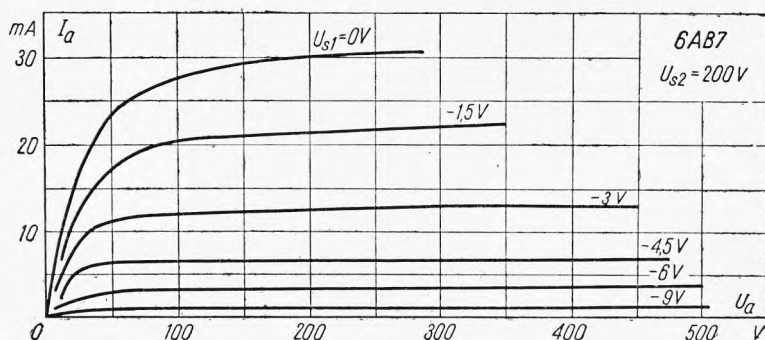

TYPY PODOBNE

1853, EF 14