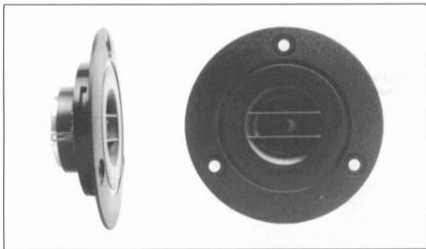


14 mm POLYMER DOME

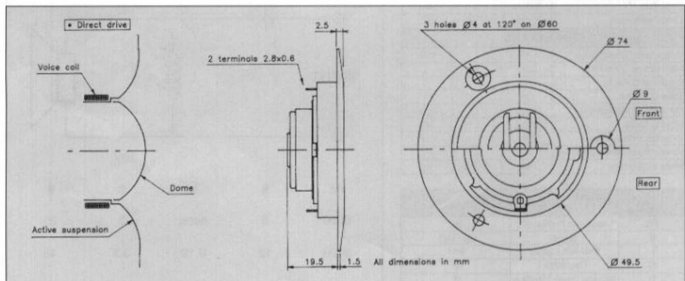
91 dB high efficiency *direct drive**
 Ferrofluid - cooled voice coil
 High power handling capability
 High dynamic characteristics

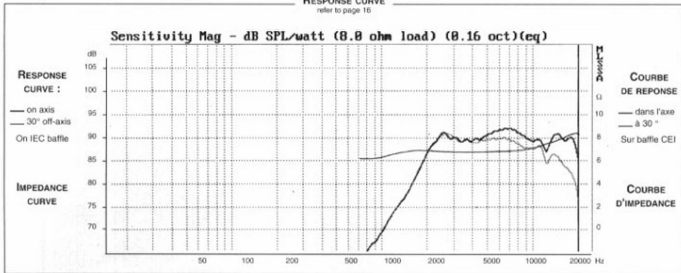
Concept *direct drive**
 Haut rendement 91 dB
 Bobine refroidie par ferrofluide
 Puissance admissible importante
 Grande capacité dynamique



Compact, 14 mm polymer dome tweeter. Ultra light moving parts with the voice coil directly wound onto the diaphragm according to the "direct drive" concept. The perfect transfer of energy is the source of its musical qualities, high definition and high efficiency. The voice coil wound onto the high temperature polymer is cooled with ferrofluid for high power handling. Easily coupled with 2nd order crossover as shown Fig 1. Two crossover points are suggested for adequate power handling.

Compact, ce tweeter à dôme de 14 mm en polymère doit la légèreté de son équipement mobile à son concept "direct drive" par lequel la bobine est réalisée directement sur le diaphragme. Le parfait transfert d'énergie est à l'origine de ses qualités musicales, de sa haute définition et de son haut rendement. Le concept "direct drive" couplé à la bobine refroidie par ferrofluide lui confère une puissance admissible importante dans sa catégorie. Il peut être filtré au second ordre (12 dB/Oct) selon le schéma Fig 1. Deux fréquences de coupure sont proposées afin d'obtenir la tenue en puissance adéquate.



RESPONSE CURVE
 refer to page 16


SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
---------------------------	--------	-------	-------

PRIMARY APPLICATION

Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	2050	Hz
Nominal Power Handling	P	45	W
Sensitivity	E	91	dB

VOICE COIL

Voice coil diameter	\varnothing	14	mm
Minimum Impedance	Zmin	7.2	Ω
DC Resistance	Re	5.7	Ω
Voice Coil Inductance	Lbm	43	μ H
Voice coil Length	h	2	mm
Former	-	Polymer	-
Number of layers	n	2	-

MAGNET

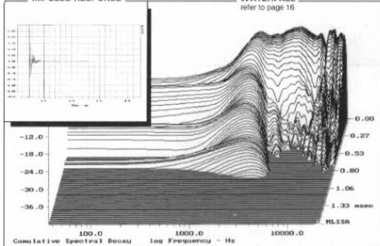
Magnet dimensions	$\varnothing \times h$	32 x 6	mm
Magnet weight	m	0,017	kg
Flux density	B	1,25	T
Force factor	BL	16	NA'
Height of magnetic gap	He	1,5	mm
Stray flux	Fmag	15	Am ⁻¹
Linear excursion	Xmax	$\pm 0,25$	mm

PARAMETERS

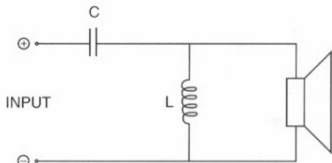
Suspension Compliance	Cms	-	mN ⁻¹
Mechanical Q Factor	Qms	-	-
Electrical Q Factor	Qes	-	-
Total Q Factor	Qts	-	-
Mechanical Resistance	Rms	-	kg s ⁻¹
Moving Mass	Mms	0,19.10 ⁻³	kg
Effective Piston Area	S	6,6.10 ⁻⁴	m ²
Volume Equivalent of Air at Cas	Vas	-	m ³
Mass of speaker	M	0,064	kg

APPLICATION PARAMETERS

Fc	Crossover Frequency	Hz
S	Slope	dB / Oct.
L	Self-inductance	mH
C	Capacitor	μ F
P	Nominal Power Handling	W

IMPULSE RESPONSE
WATERFALL
 refer to page 16

SUGGESTED APPLICATIONS

refer to page 8 to 13



Fc	S	L	C	P
4800	12	0,15	4	45
6000	12	0,12	3,3	70